HEXFET® Power MOSFET

V_{DS}	30	V
V_{GS}	±12	V
$R_{DS(on)}$ max (@V_{GS} = 4.5V)	63	mΩ
$R_{DS(on)}$ max (@V_{GS} = 2.5V)	82	mΩ
I_D (@$T_{c(Bottom)}$ = 25°C)	3.4②	A

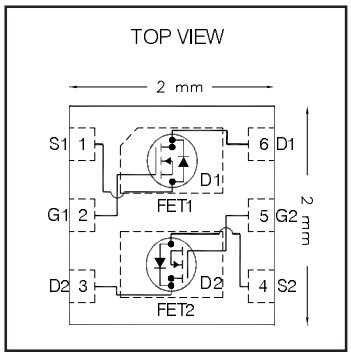

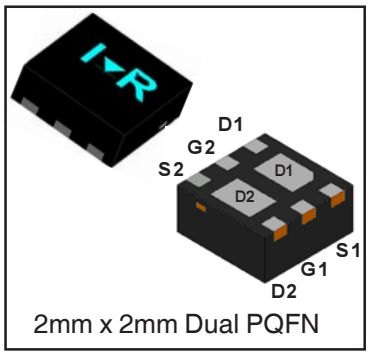

2mm x 2mm Dual PQFN

Applications

- Charge and discharge switch for battery application
- Load/System Switch

Features and Benefits

Features		Resulting Benefits
Low R_{DSon} (≤ 63mΩ)		Lower Conduction Losses
Low Thermal Resistance to PCB (≤ 19°C/W)		Enable better thermal dissipation
Low Profile (≤ 1.0mm)	results in	Increased Power Density
Industry-Standard Pinout	⇒	Multi-Vendor Compatibility
Compatible with Existing Surface Mount Techniques		Easier Manufacturing
RoHS Compliant Containing no Lead, no Bromide and no Halogen		Environmentally Friendlier

Orderable part number	Package Type	Standard Pack		Note
		Form	Quantity	
IRLHS6376TRPBF	PQFN Dual 2mm x 2mm	Tape and Reel	4000	
~~IRLHS6376TR2PBF~~	~~PQFN Dual 2mm x 2mm~~	~~Tape and Reel~~	~~400~~	EOL notice #259

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	30	V
V_{GS}	Gate-to-Source Voltage	±12	
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 4.5V	3.6②	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 4.5V	2.9	
I_D @ $T_{C(Bottom)}$ = 25°C	Continuous Drain Current, V_{GS} @ 4.5V	7.6②	
I_D @ $T_{C(Bottom)}$ = 100°C	Continuous Drain Current, V_{GS} @ 4.5V	4.9②	
I_D @ $T_{C(Bottom)}$ = 25°C	Continuous Drain Current, V_{GS} @ 4.5V (Package Limited)	3.4②	
I_{DM}	Pulsed Drain Current ①	30	
P_D @T_A = 25°C	Power Dissipation ④	1.5	W
P_D @$T_{C(Bottom)}$ = 25°C	Power Dissipation ④	6.6	
	Linear Derating Factor ④	0.012	W/°C
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C

Notes ① through ⑥ are on page 2

Static @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	30	—	—	V	V_{GS} = 0V, I_D = 250µA
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.023	—	V/°C	Reference to 25°C, I_D = 1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	48	63	mΩ	V_{GS} = 4.5V, I_D = 3.4A ③②
		—	61	82		V_{GS} = 2.5V, I_D = 3.4A ③②
$V_{GS(th)}$	Gate Threshold Voltage	0.5	0.8	1.1	V	V_{DS} = V_{GS}, I_D = 10µA
$\Delta V_{GS(th)}$	Gate Threshold Voltage Coefficient	—	-3.6	—	mV/°C	
I_{DSS}	Drain-to-Source Leakage Current	—	—	1.0	µA	V_{DS} = 24V, V_{GS} = 0V
		—	—	150		V_{DS} = 24V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	V_{GS} = 12V
	Gate-to-Source Reverse Leakage	—	—	-100		V_{GS} = -12V
gfs	Forward Transconductance	8.8	—	—	S	V_{DS} = 10V, I_D = 3.4A②
Q_g	Total Gate Charge ⑥	—	2.8	—	nC	V_{DS} = 15V
Q_{gs}	Gate-to-Source Charge ⑥	—	0.13	—		V_{GS} = 4.5V
Q_{gd}	Gate-to-Drain Charge ⑥	—	1.1	—		I_D = 3.4A② (See Fig.17 & 18)
R_G	Gate Resistance	—	4.6	—	Ω	
$t_{d(on)}$	Turn-On Delay Time	—	4.4	—	ns	V_{DD} = 10V, V_{GS} = 4.5V
t_r	Rise Time	—	11	—		ID = 3.4A②
$t_{d(off)}$	Turn-Off Delay Time	—	11	—		R_G=1.8Ω
t_f	Fall Time	—	9.4	—		See Fig.15
C_{iss}	Input Capacitance	—	270	—	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	—	32	—		V_{DS} = 25V
C_{rss}	Reverse Transfer Capacitance	—	20	—		f = 1.0MHz

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	7.6②	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	30		
V_{SD}	Diode Forward Voltage	—	—	1.2	V	T_J = 25°C, I_S = 3.4A②, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	—	8.0	12	ns	T_J = 25°C, I_F = 3.4A②, V_{DD} = 15V
Q_{rr}	Reverse Recovery Charge	—	5.9	8.9	nC	di/dt = 260A/µs ③
t_{on}	Forward Turn-On Time	Time is dominated by parasitic Inductance				



Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$ (Bottom)	Junction-to-Case ⑤	—	19	°C/W
$R_{\theta JC}$ (Top)	Junction-to-Case ⑤	—	175	
$R_{\theta JA}$	Junction-to-Ambient ④	—	86	
$R_{\theta JA}$ (<10s)	Junction-to-Ambient ④	—	69	

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

② Current limited by package.

③ Pulse width ≤ 400µs; duty cycle ≤ 2%.

④ When mounted on 1 inch square copper board.

⑤ R_θ is measured at T_J of approximately 90°C.

⑥ For DESIGN AID ONLY, not subject to production testing.

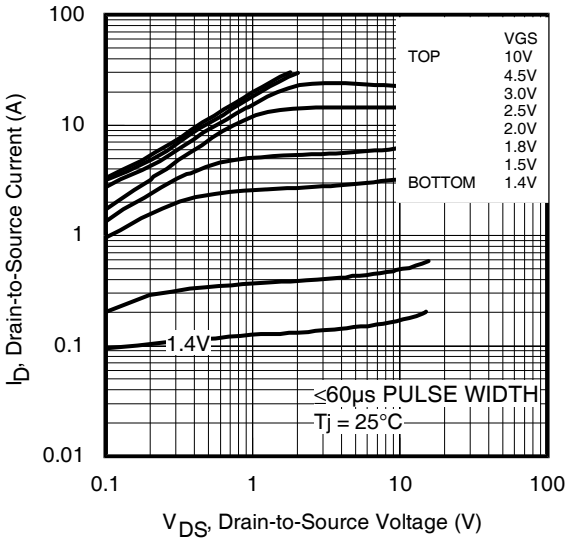

Fig 1. Typical Output Characteristics

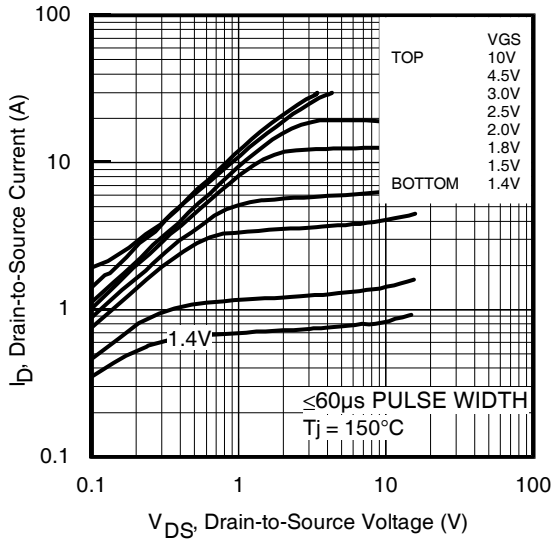

Fig 2. Typical Output Characteristics

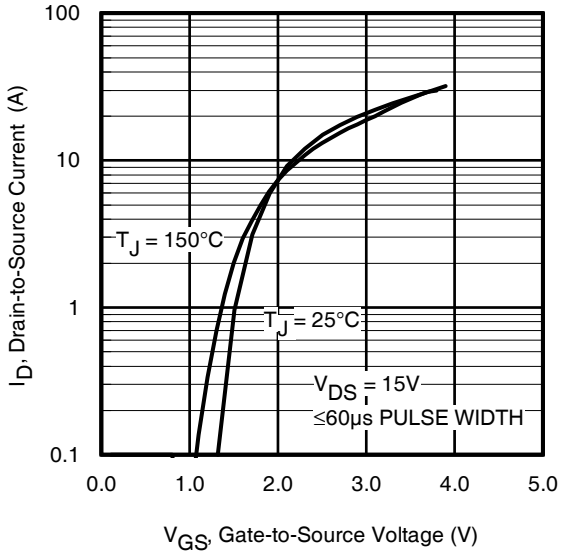

Fig 3. Typical Transfer Characteristics

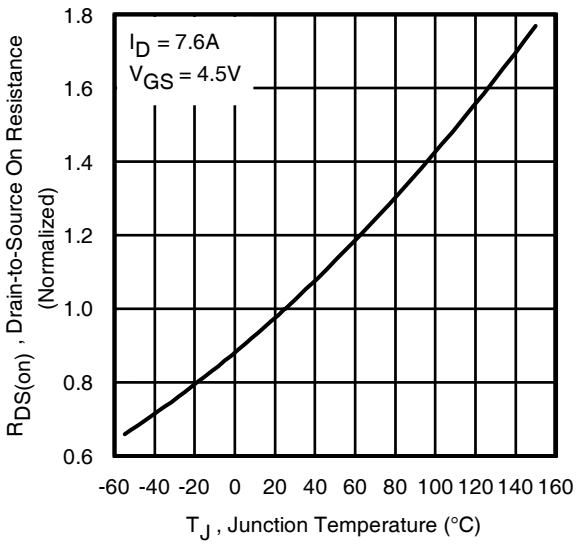

Fig 4. Normalized On-Resistance vs. Temperature

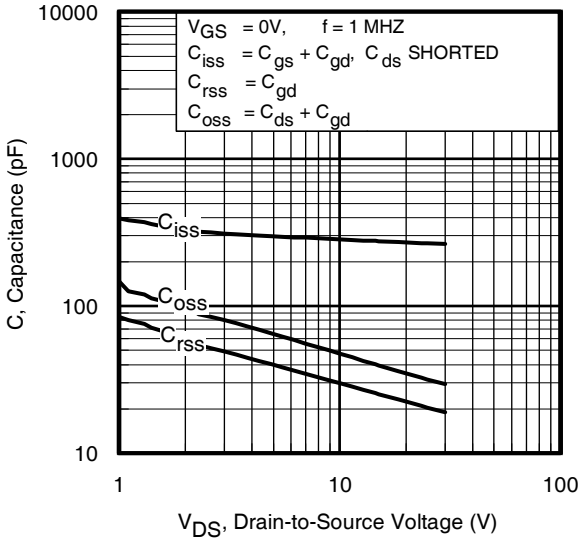

Fig 5. Typical Capacitance vs.Drain-to-Source Voltage

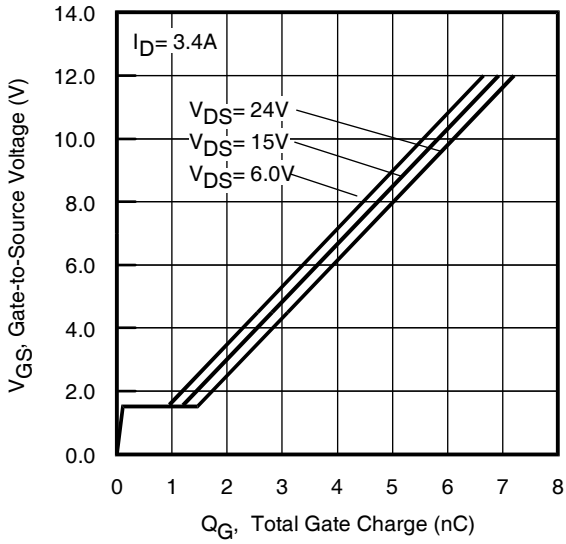

Fig 6. Typical Gate Charge vs.Gate-to-Source Voltage

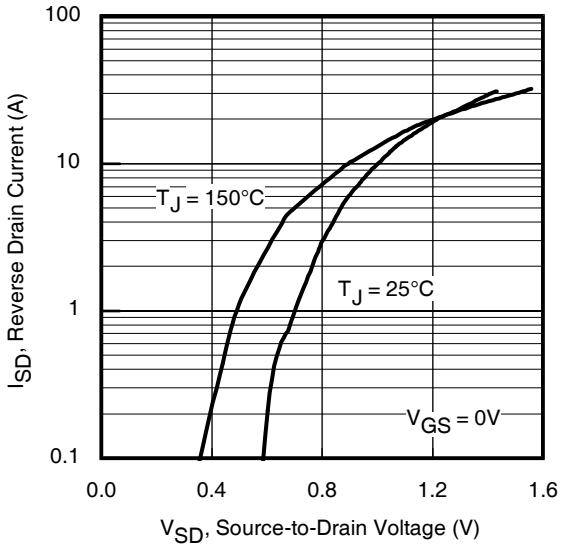

Fig 7. Typical Source-Drain Diode Forward Voltage

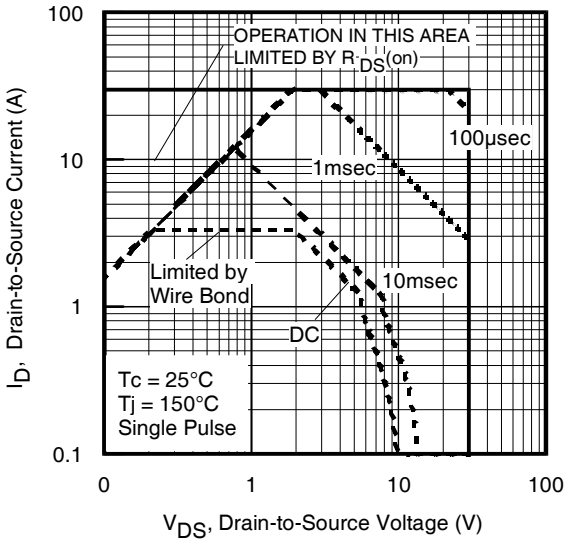

Fig 8. Maximum Safe Operating Area

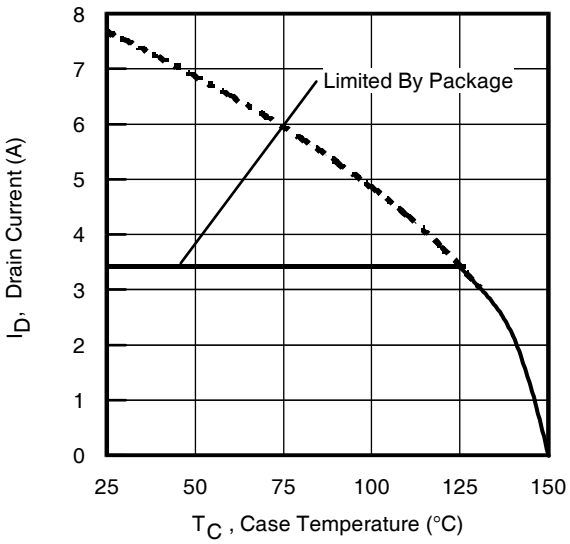

Fig 9. Maximum Drain Current vs. Case (Bottom) Temperature

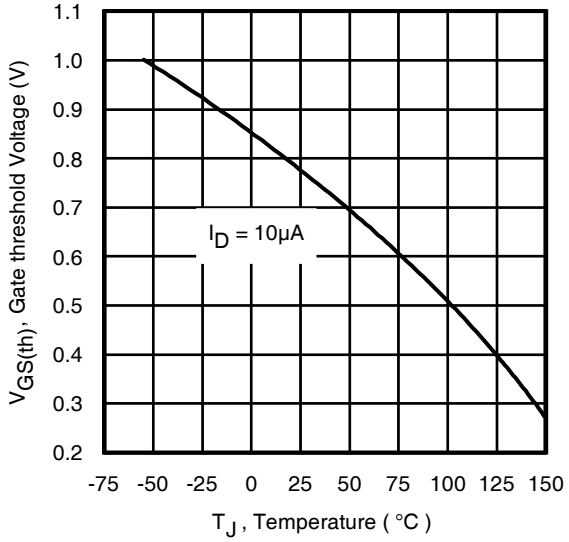

Fig 10. Threshold Voltage vs. Temperature

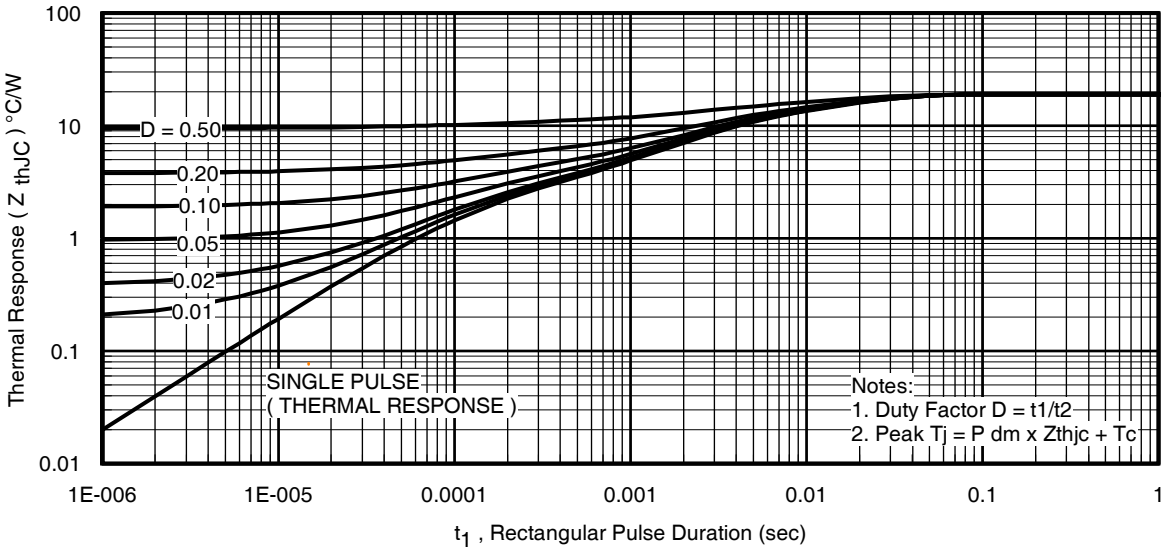

Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case (Bottom)

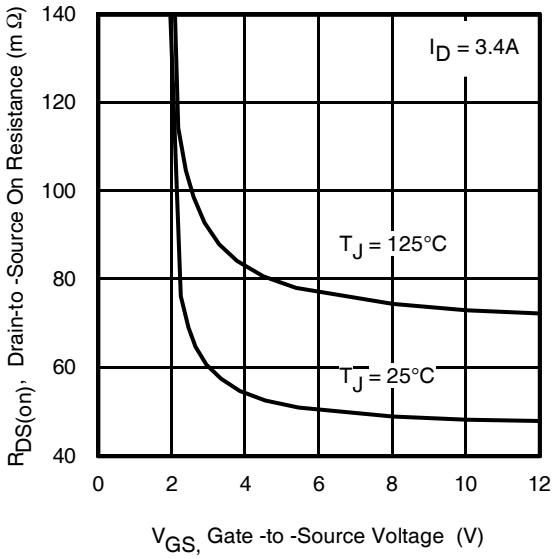

Fig 12. On-Resistance vs. Gate Voltage

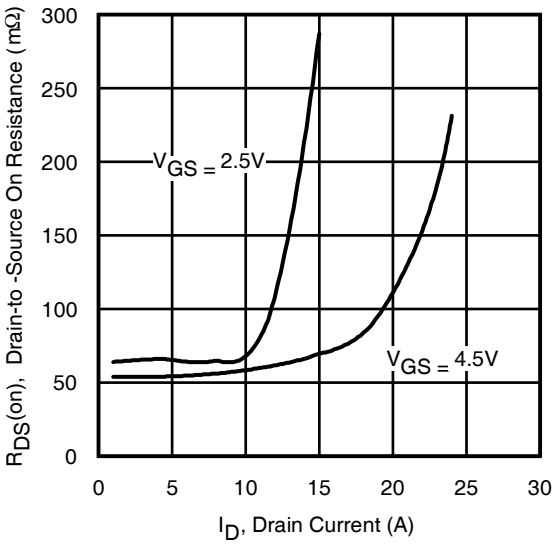

Fig 13. Typical On-Resistance vs. Drain Current

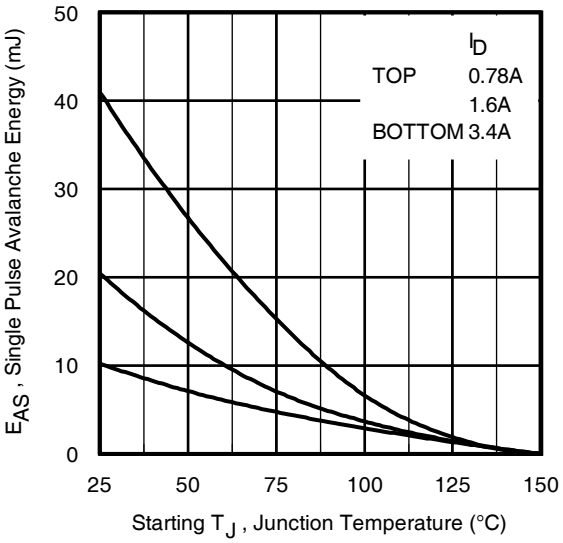

Fig 14. Maximum Avalanche Energy vs. Drain Current

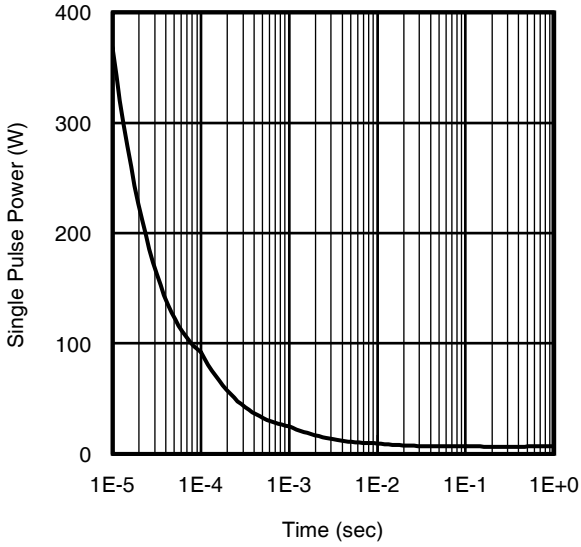

Fig 15. Typical Power vs. Time

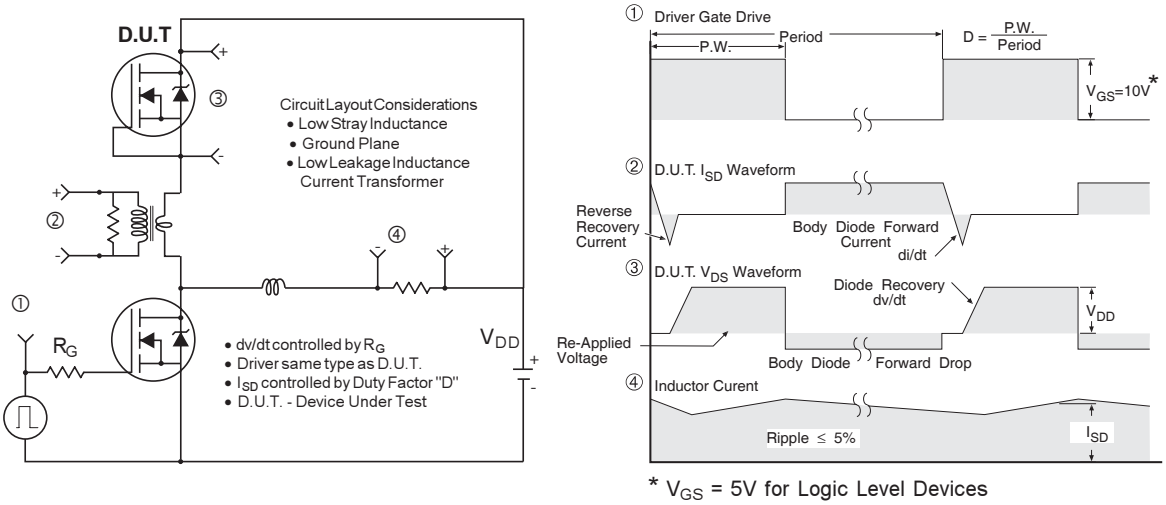

* V_{GS} = 5V for Logic Level Devices

Fig 16. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

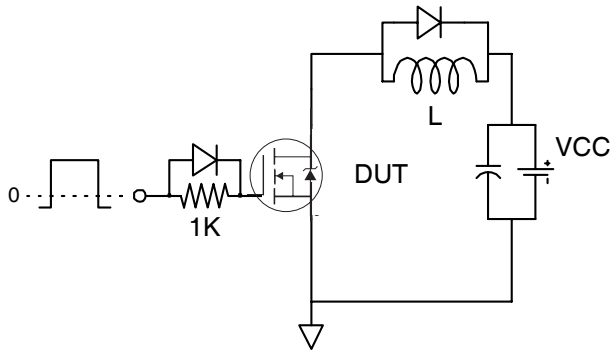

Fig 17a. Gate Charge Test Circuit

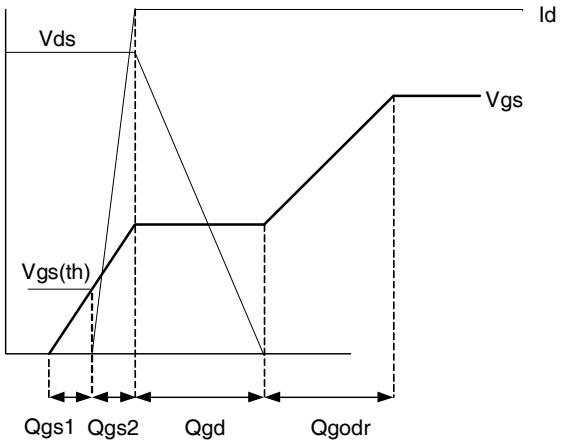

Fig 17b. Gate Charge Waveform

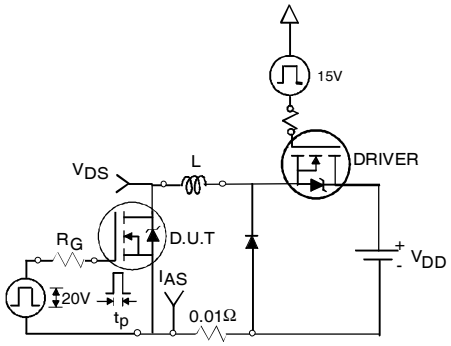

Fig 18a. Unclamped Inductive Test Circuit

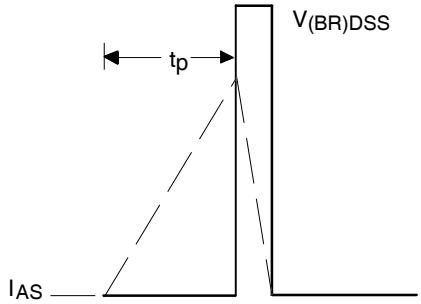

Fig 18b. Unclamped Inductive Waveforms

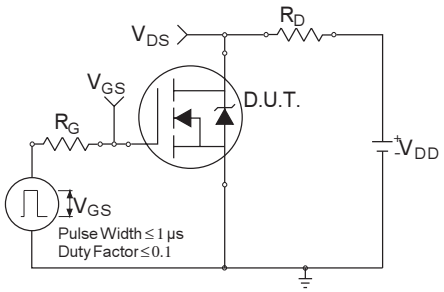

Fig 19a. Switching Time Test Circuit

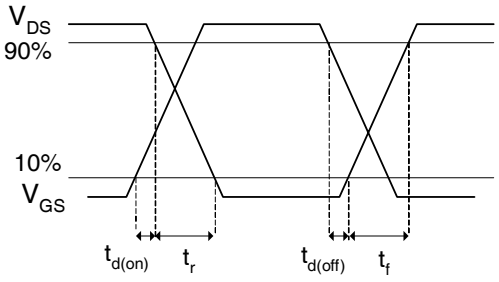

Fig 19b. Switching Time Waveforms

PQFN Dual 2x2 Outline Package Details

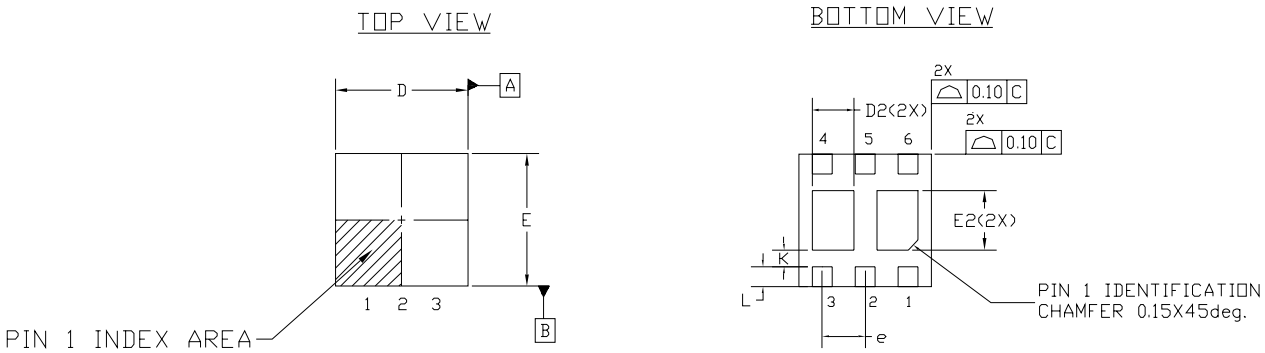

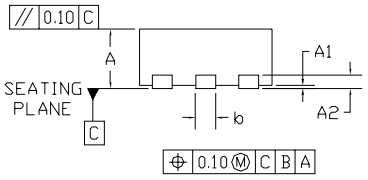

SYMBOL	COMMON					
	DIMENSIONS MILLIMETER			DIMENSIONS INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00	0.032	0.036	0.040
A1	0.00	0.02	0.05	0.000	0.001	0.002
A2	0.203 REF			0.008 REF		
b	0.25	0.30	0.35	0.010	0.012	0.014
D	1.90	2.00	2.10	0.075	0.079	0.083
D2	0.575	0.625	0.675	0.023	0.025	0.027
E	1.90	2.00	2.10	0.075	0.079	0.083
E2	0.85	0.90	0.95	0.034	0.036	0.038
e	0.65 BSC			0.026 BSC		
L	0.25	0.30	0.35	0.010	0.012	0.014
K	0.25	–	–	0.010	–	–

NOTES :

1. DIMENSION AND TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. CONTROLLING DIMENSIONS : MILLIMETER. CONVERTED INCH DIMENSION ARE NOT NECESSARILY EXACT.

For more information on board mounting, including footprint and stencil recommendation, please refer to application note AN-1136:
http://www.irf.com/technical-info/appnotes/an-1136.pdf
For more information on package inspection techniques, please refer to application note AN-1154:
http://www.irf.com/technical-info/appnotes/an-1154.pdf

PQFN Dual 2x2 Outline Part Marking

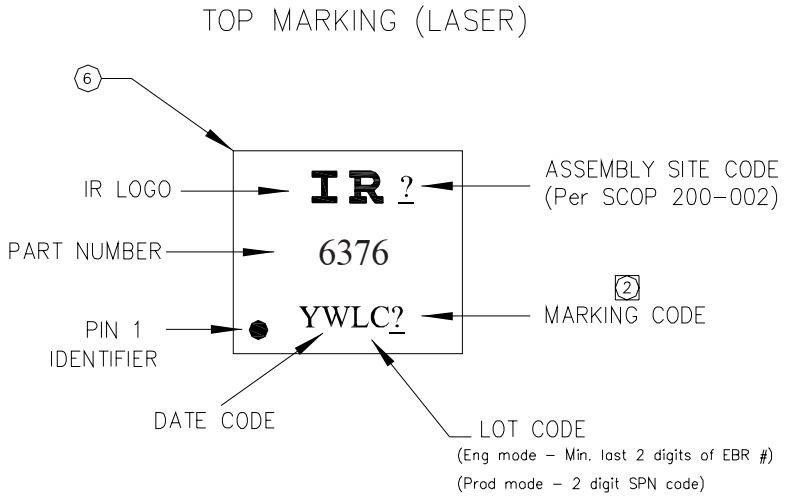

Note: For the most current drawing please refer to IR website at: http://www.irf.com/package/

PQFN Dual 2x2 Outline Tape and Reel

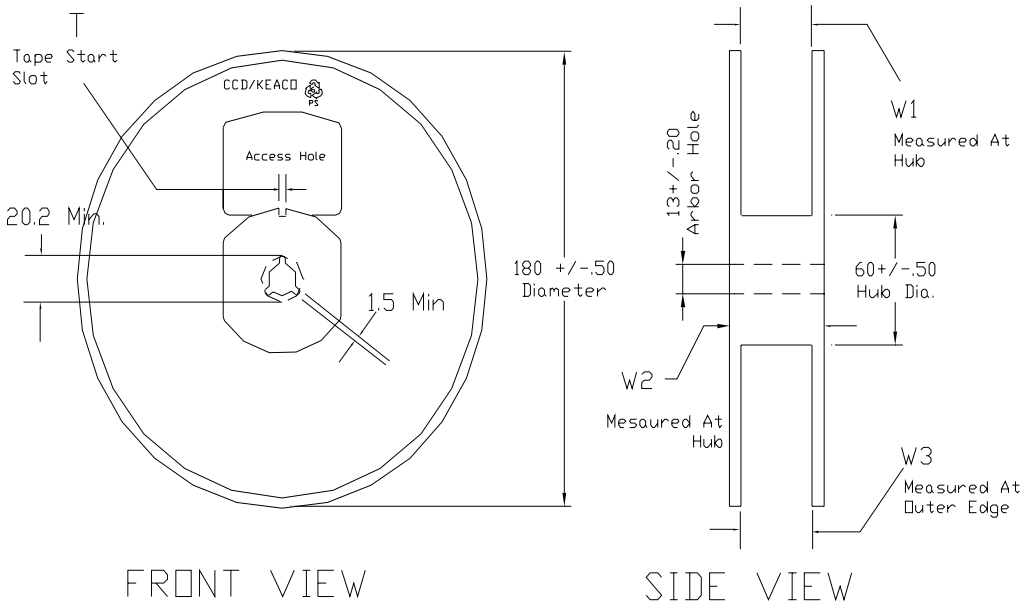

TABLE 1: REEL DETAILS

TAPE WIDTH	T	W1	W2	W3	PART NO
8 MM	3 ± 0.50	$8.4^{+1.5}_{-0.0}$	14.4 Max	7.90 Min 10.9 Max	91586-1
12 MM	5 ± 0.50	$12.4^{+2.0}_{-0.0}$	18.4 Max	11.9 Min 15.4 Max	91586-2

Note: Surface resistivity is $\geq 1x10^{5}$ but $< 1x10^{12}$ ohm/sq.

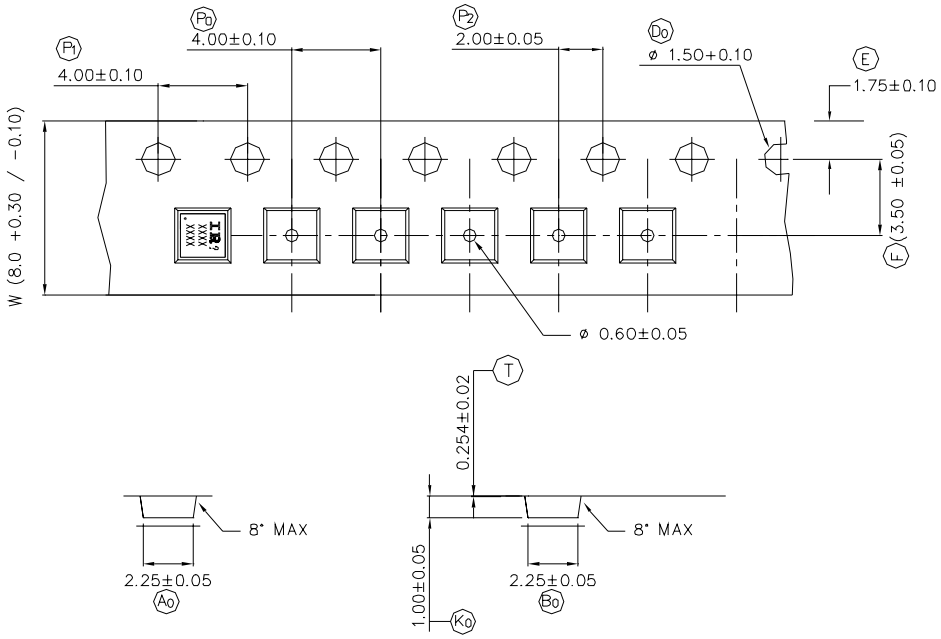

NOTE: The Surface Resistivity is 10^{4} – 10^{8} OHM/SQ

Qualification information†

Qualification level	Industrial (per JEDEC JESD47F †† guidelines)	
Moisture Sensitivity Level	PQFN Dual 2mm x 2mm	MSL1 (per JEDEC J-STD-020D††)
RoHS compliant	Yes	

† Qualification standards can be found at International Rectifier's web site http://www.irf.com/product-info/reliability

†† Applicable version of JEDEC standard at the time of product release.

Revision History

Date	Comment
1/20/2014	• Updated ordering information to reflect the End-Of-Life (EOL) of the mini-reel option (EOL notice #259). • Updated data sheet with the new IR corporate template. • Updated the qual level from Consumer to Industrial, on page 9.

International IOR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA
To contact International Rectifier, please visit http://www.irf.com/whoto-call/

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie") .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (**www.infineon.com**).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.