ModusToolbox™ software installation guide

ModusToolbox™ Setup program version 1.8.0

About this document

A newer version of this document may be available on the web here.

Scope and purpose

This guide provides instructions for installing ModusToolbox™ software, which is a set of tools that enable you to integrate our devices into your existing development methodology. The guide focuses on the ModusToolbox™ Setup program to install the various packages required. Refer to the tools package release notes for details about what is included in that package. Refer to earlier revisions of this guide for instructions to install previous versions of ModusToolbox™ tools packages.

References

- ModusToolbox™ Software website
- Refer to the tools package quick start guide for brief instructions to start working with the tools.
- You can also refer to the ModusToolbox™ training available on GitHub.
- Refer to the tools package user guide for detailed descriptions and instructions for all the tools included with the tools package.
- Refer to the Dashboard user guide for instructions for using that tool.

Table of contents

About this document . . . 1
Table of contents . . . 2
1 General information . . . 3
1.1 System requirements . . . 3
1.2 Prerequisites . . . 4
1.3 Internet access . . . 4
1.4 Spaces or illegal characters in home directory . . . 4
1.5 Python . . . 4
1.6 SEGGER J-Link . . . 4
2 Installation instructions . . . 5
2.1 Downloading the Setup program . . . 5
2.2 Installing the Setup program . . . 6
2.3 Launching the Setup program . . . 7
2.4 Installing the minimum required software packages . . . 8
2.5 Installing IDEs . . . 11
2.6 Installing packs . . . 11
2.7 Run the Dashboard (optional) . . . 13
3 Advanced installation instructions . . . 14
3.1 Installing using non-silent option . . . 14
4 Updating versions instructions . . . 20
5 Setup program GUI description . . . 23
5.1 Menus . . . 23
5.2 Main toolbar . . . 23
5.3 Packages view . . . 24
5.4 Log panel . . . 24
5.5 Preferences dialog . . . 25
6 Troubleshooting . . . 26
6.1 How to collect logs . . . 26
Disclaimer . . . 27

1 General information

Since the 3.2 release of ModusToolbox™ software, the Setup program provides the easiest method to install the various packages and packs you need to create, build, and debug applications for various Infineon devices. It also helps you manage all these pieces, learn about new packages and install them, and keep them up to date.

- During initial installation, it allows you to select the pieces of ModusToolbox™ software that interest you. This includes platform tools, patches, packs and programming tools.
- During development, it gives you an easy way to track versions and update/install/uninstall content as needed.
- If you attempt to create an application or add a library that requires content not currently installed, the associated tools (including Project Creator and Library Manager) will inform you of the required packages.

This section covers a few general aspects of installing ModusToolbox™ software.

1.1 System requirements

The ModusToolbox™ tools package consumes approximately 2 GB of disk space. Like most modern software, it requires both free disk space and memory to run effectively. We recommend a system configuration with a PassMark CPU score > 2000 (cpubenchmark.net), at least 25 GB of free disk space, and 8 GB of RAM. The product will operate with fewer resources; however, performance may be degraded.

ModusToolbox™ software is supported on the following 64-bit operating systems:

Host OS	Supported	Recommended (full testing)
Windows	11	11
macOS (Intel® processor)	Not supported	Not supported
macOS (Arm® processor)	Sonoma, Sequoia, and Tahoe (Native ARM)	Tahoe
Linux	Ubuntu 22.04 LTS, 24.04 LTS, 25.04	24.04 LTS

***Note**: ModusToolbox™ software is not supported on 32-bit operating systems.*

1.2 Prerequisites

The ModusToolbox™ Setup program depends on the Infineon Developer Center Launcher Service. This service is automatically installed by the ModusToolbox™ Setup installer.

On Ubuntu Linux, the Setup program depends on the “sudo” and “apt” utilities to perform the automated installation of the ModusToolbox™ packages. Additionally, the “gnome-terminal” application is used to perform the interactive uninstallation of the packages and self-update of the tool. These are standard tools provided in Linux.

On macOS, the Setup program depends on the “sudo” and “Installer” utilities to perform the automated installation of the packages. Additionally, “osascript” utility is used to perform the uninstallation. These utilities are provided as part of default macOS installation.

1.3 Internet access

In order to use the ModusToolbox™ Setup program installer, you will need access to the Infineon website to download it: https://softwaretools.infineon.com/tools/com.ifx.tb.tool.modustoolboxsetup

If you do not have access, work with your IT department to download on your machine or have the software placed on a local server or a thumb drive. Refer also to the "Installing with firewall or lack of web access" section in the Advanced ModusToolbox™ installation instructions.

1.4 Spaces or illegal characters in home directory

Because the ModusToolbox™ build system is based on GCC make, you cannot have spaces or illegal characters in your home directory name. Various commands will fail. If you have such a home directory, you need to follow instructions described in Installing using non-silent option.

1.5 Python

Several types of ModusToolbox™ applications require Python such as those including MCUBoot, CySecureTools, and OPTIGA™ Trust M. Python is not included in the ModusToolbox™ tools package. Refer to https://www.python.org/ for information about downloading and installing Python.

1.6 SEGGER J-Link

If you plan to use the SEGGER J-link debugger, you must download and install the appropriate software pack for your OS. It is not included with the ModusToolbox™ tools package. Use version 6.98 or later. For Linux, if you install this using the tar.gz file, make sure you install J-Link in a common location. Otherwise, you must configure the Eclipse IDE to specify the location, as follows:

Window > Preferences > MCU > Global SEGGER J-Link Path

- **Executable**: *JLinkGDBServerCLExe*
- **Folder**: *<J-Link_extracted_location>*

2 Installation instructions


The easiest way to install ModusToolbox™ software is to use the ModusToolbox™ Setup program. After you install it, you need to launch Setup program to view and select various ModusToolbox™ packages to install. As packages are updated to new versions over time, you can then use the Setup program to update your system, and the Setup program will even check to update itself. This section contains the following steps:

- Downloading the Setup program
- Installing the Setup program
- Launching the Setup program
- Installing the minimum required software packages
- Installing packs

***Note**: The Setup program version is separate from the versions of the tools packages and various other packages. Each different program and package will likely be updated at different times instead of all at the same time.*

2.1 Downloading the Setup program

The Setup program is available from the Infineon website: https://softwaretools.infineon.com/tools/com.ifx.tb.tool.modustoolboxsetup

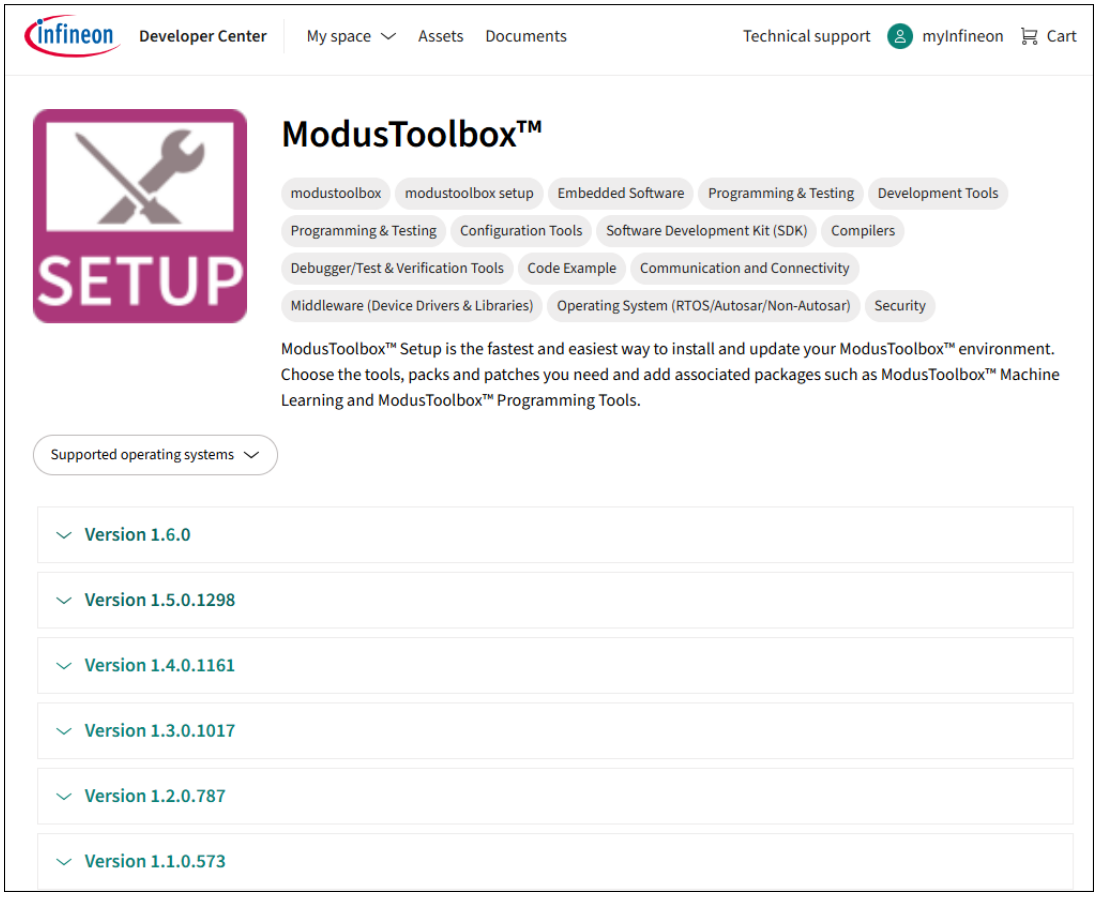

Select your operating system and click the **Download** button.


***Note**: In some cases, you may see an Install via Launcher button. If so, ignore it and use the **Download** option.*

2.2 Installing the Setup program

When the download completes, follow the instructions for your operating system.

macOS

On macOS, launch the installer and follow the wizard. The default is to install for all users in *Applications*.

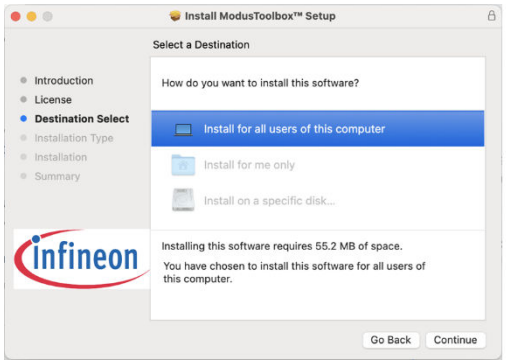

Linux

On Linux, open a terminal and run `sudo apt install <package-name>.deb`. The Debian package doesn't provide a user option and installs for all users in */opt/Tools*.


***Note**:* *If you see a message similar to this:*

"N: Download is performed unsandboxed as root as file '/home/{username}/Downloads/ ModusToolboxSetupInstaller_1.X.Y.Z_linux_x64.deb' couldn't be accessed by user '_apt'. - pkgAcquire::Run (13: Permission denied)",

Simply disregard it, as this message is not an error, but a notice informing you that 'apt' tool accesses the package file under the "root" user instead of "_apt" user having restricted rights. This does not affect the installation process of the tool.

Windows

On Windows, launch the installer, and select **Install for me only (recommended)** in most cases.

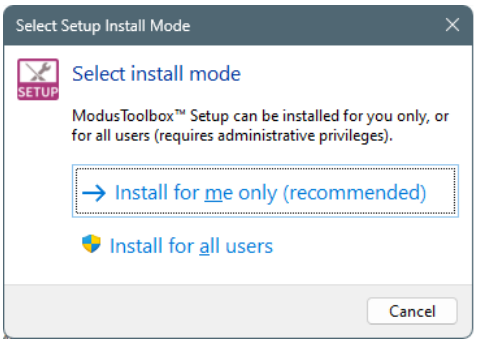


2.3 Launching the Setup program

Initial installation

On the final screen of the installer, there will be an option to launch the Setup program and to open the release notes. If you select the options, they will open automatically when you click **Finish**. If you choose to launch the Setup program later, you can do so as applicable for your operating system.

If you do not have any ModusToolbox™ tools package installed, the Setup program opens showing you two options:

- **Default** – Selects all the newest minimum required packages.
- **Select** – Allows you to select the packages you want.

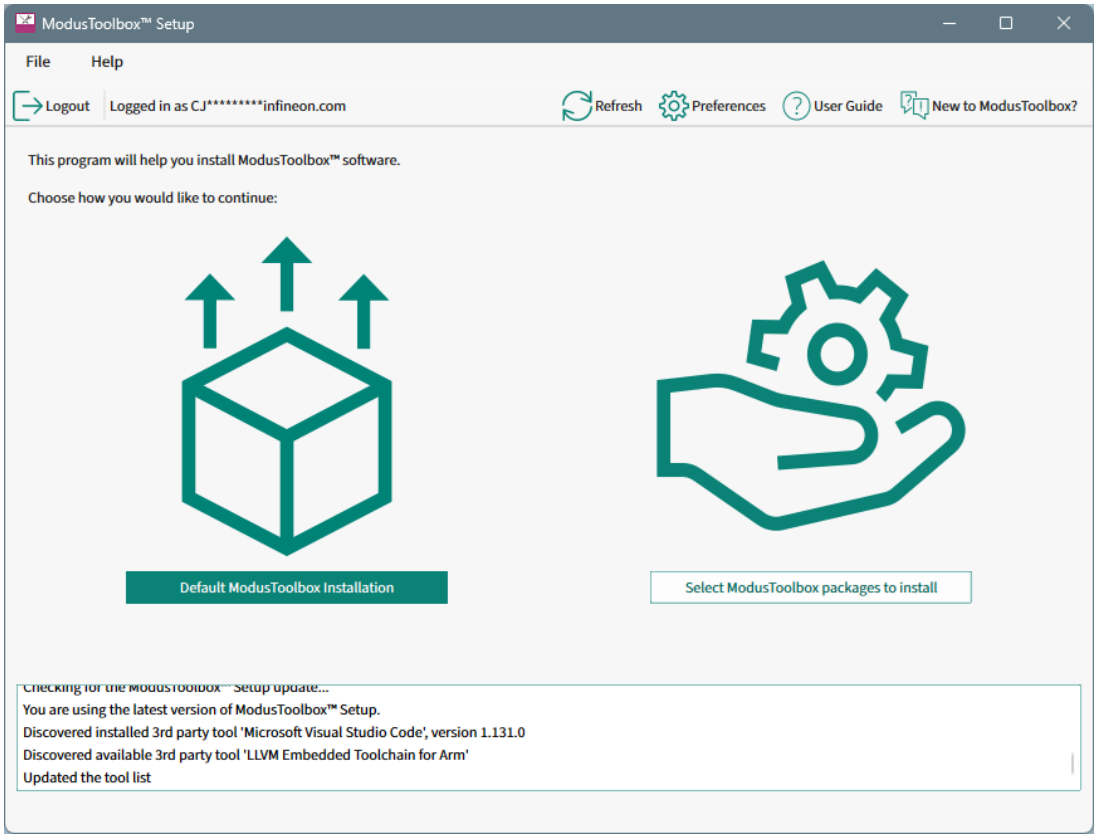

Subsequent uses


After you have installed a ModusToolbox™ tools package, the Setup program will open showing you what is installed, as well as any other packages that are available. Refer to the Setup program GUI description section for more details.

Also after installing, you can also launch the Setup program from the Dashboard, as well as from various tools such as Project Creator or Library Manager if they prompt you when your application does not have a required asset.

2.4 Installing the minimum required software packages

To install the minimum required software:

1. Click the **Default** option if it is available. This will select the latest versions of these packages automatically (as shown in Step 3):
   - Eclipse, unless the Setup program detects that VS Code is installed. If so, Eclipse is not selected.
   - GCC
   - Tools package
   - Edge Protect Security Suite
   - Programming tools
2. If the **Default** option is not available, or if you want to choose other the packages using the **Custom** option, select the tools package version you want to install. This will also select the dependencies as described in Step 1.

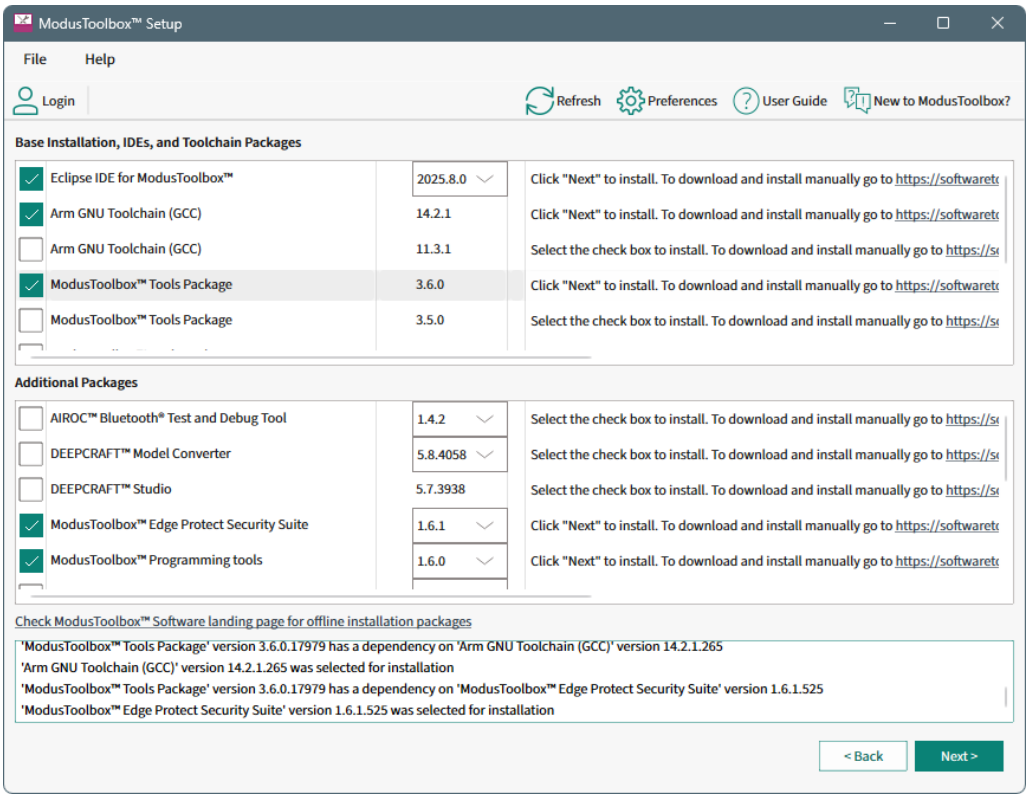


***Note**: Earlier releases of the ModusToolbox™ tools package included Eclipse and GCC. They are now separate installable packages.*


3. Click **Next >**.

   This screen shows the packages that will be installed, with links to the release notes and license for each package. We recommend using the default installation option. See Installing using non-silent option if you need to install in a non-default location.

2 Installation instructions

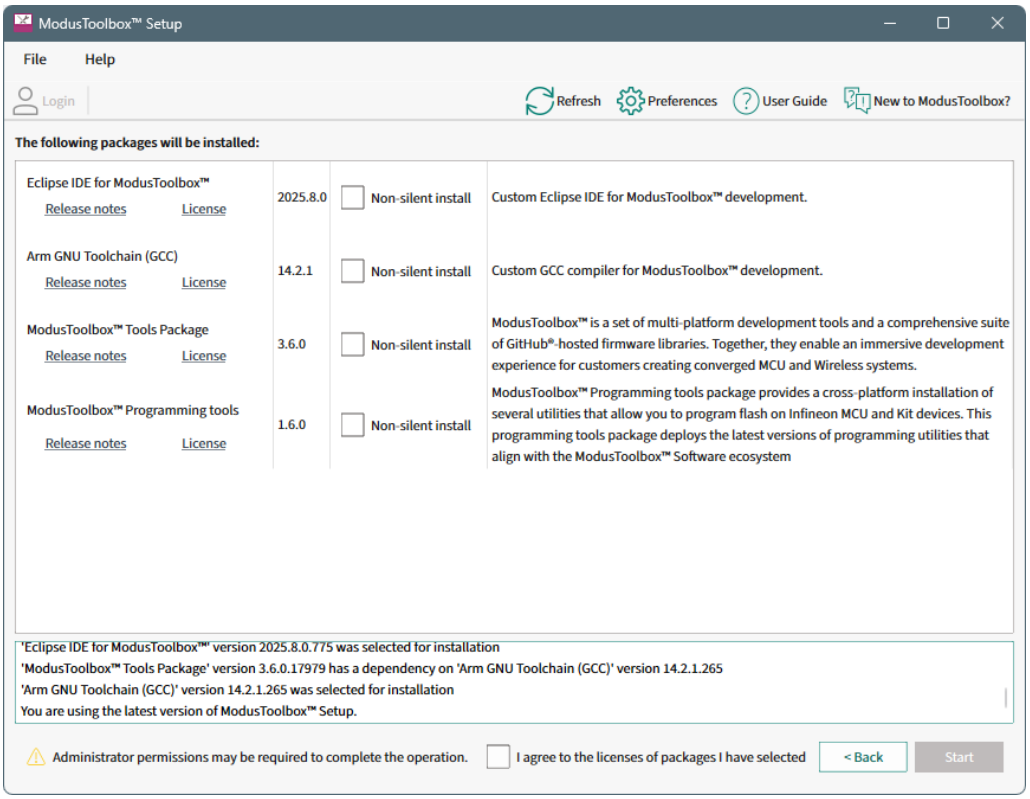


4. Select the **I agree to the licenses …** check box and click **Start**.

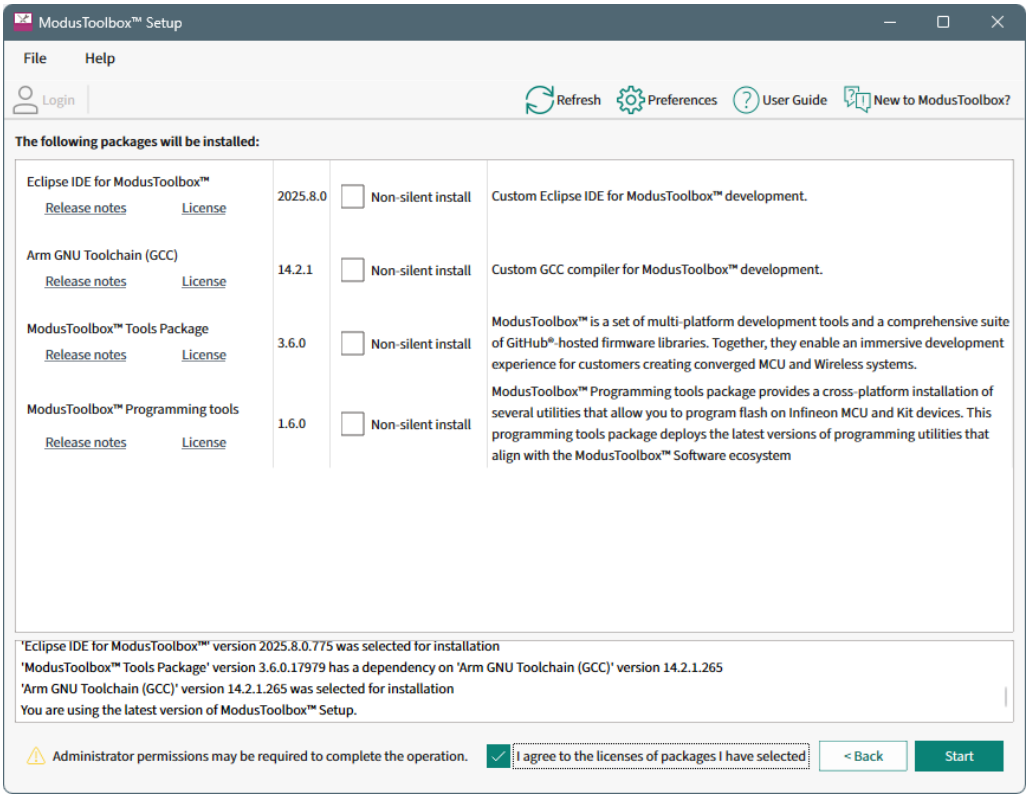

The Setup program will download and install the selected packages.


***Note**: Installing Programming tools and some other packages may require an Administrator user name and password to proceed.*

***Note**: On Windows, if you need to install the tools package in a non-default location, see Installing using non-silent option.*

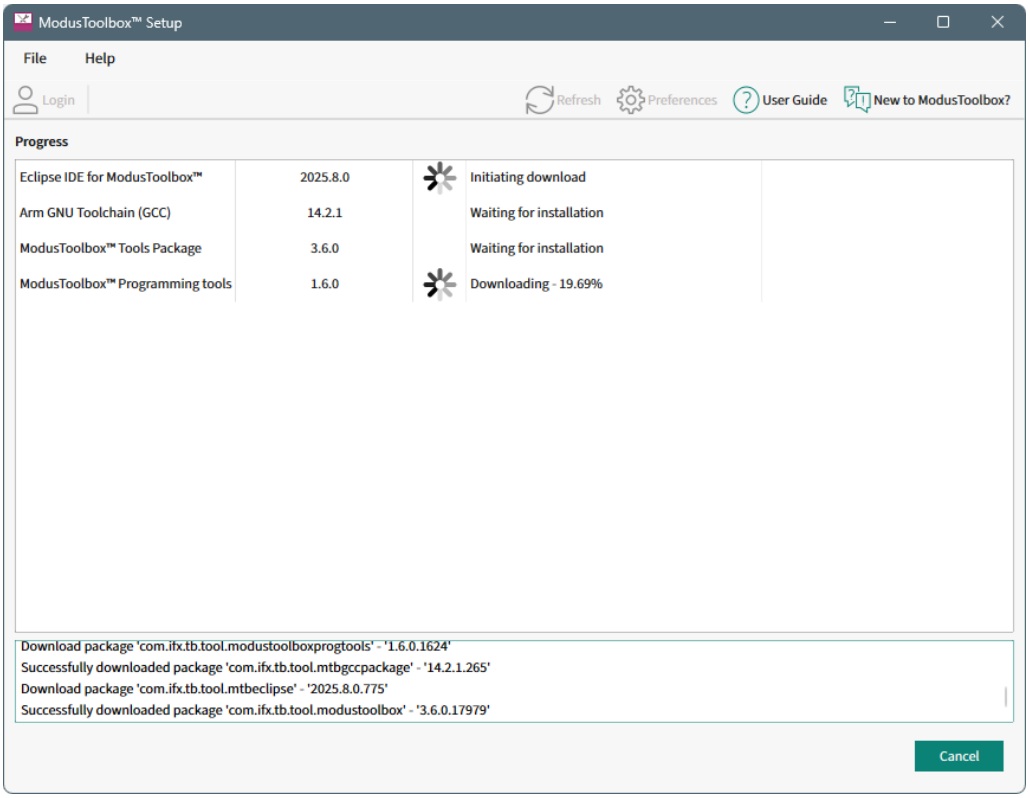

***Note**: Clicking the **Cancel** button will not affect install operations that have already started; only pending install operations will be stopped.*

5. When all packages are installed, the Setup program shows options to run various tools. Click **Run** for the tools you wish to start.

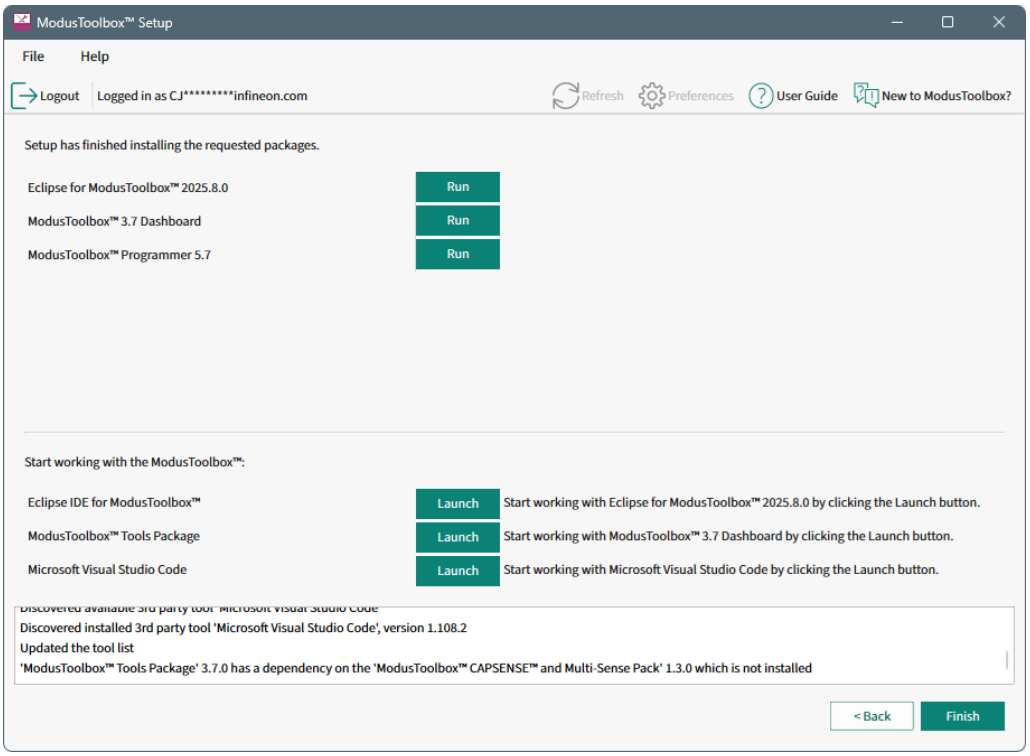

6. Click **Back** to return to the select packages window. **Finish** or click **File > Exit** to close the Setup program.

2.5 Installing IDEs

You can use the Setup program to install the Eclipse IDE as a separate package. Just select it from the list.

You can also use the Setup program to download Microsoft Visual Studio Code to install it separately. Click on the *Download MS VS Code* link. In the opened browser window, download the installation package suitable for your system and install it manually following platform-specific guides on https://code.visualstudio.com/docs/setup/setup-overview. On Ubuntu Linux, the recommended packages are "deb" or "snap". On macOS, download and extract the .zip archive content and drag "Visual Studio Code.app" to the Applications folder.

After the installation is complete, return to the ModusToolbox™ Setup window and click the **Refresh** button to update the UI.

Once either IDE is installed, the Setup program provides a button to launch it.

2.6 Installing packs

After installing the minimum required software packages, you are ready to begin developing your application using the ModusToolbox™ ecosystem. Our devices and software support multiple technologies. Review these webpages to learn more. You can use the Setup program to install additional packs as needed.

- Machine Learning
- Connectivity
- Industrial
- Security

Refer also to the tools package user guide for a complete description of the ModusToolbox™ ecosystem, information about the build system, manifest, and BSPs, as well as instructions about how to get started creating and building an application.

There are two kinds of packs:

- Technology packs - long term packs that provide extended technology software and tools as noted above.
- Early access packs - short term packs to provide selected customers access to newer devices and technology that is still being developed.

2.6.1 Installing technology packs

To install a particular technology pack, you can just select it in the Setup program. There are no special requirements to install and use these types of packs, other than having the base tools package and dependencies already installed.

2.6.2 Installing early access packs (tools 3.x)


To install an early access pack, you must be given access. This may include signing a non-disclosure agreement (NDA). Once you have permission, you will be able to see available early access packs when you log in to the Setup program. Then, you can select it and download/install it the same as any pack or package.

In order to use an early access pack, you must enable it using the Settings tool. Refer to the Settings tool user guide for details about that tool.

2.7 Run the Dashboard (optional)

The ModusToolbox™ tools package includes an optional Dashboard tool. To run the Dashboard select the option on the final page of the Setup program after installation has complete. You can also run the Dashboard as follows:

- **Windows**: Select the "dashboard" item from the Windows **Start** menu.
- **Linux**: Navigate to */<install-path>/ModusToolbox/tools_<version>/dashboard* and run the executable.
- **macOS**: Run the "dashboard" app.

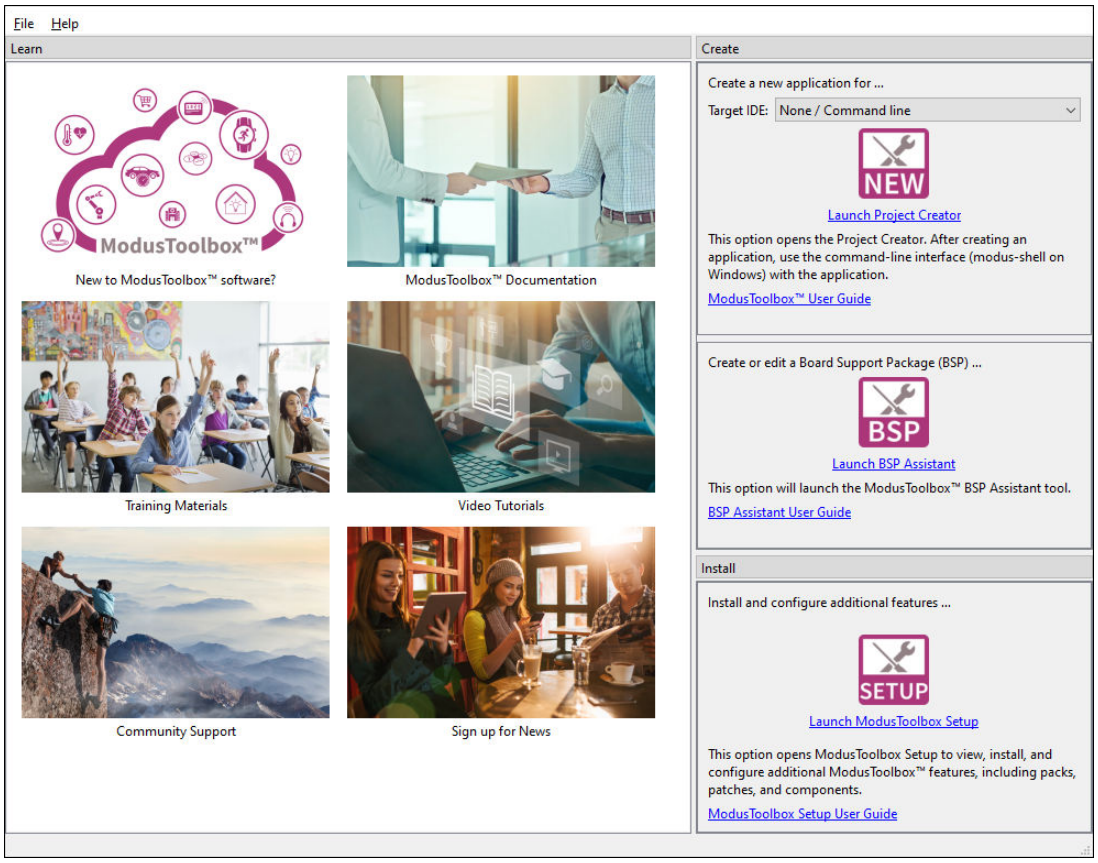


The Dashboard provides links to various sources of documentation and training materials. It also contains starting points: create a new application, create/edit a BSP, install or launch the ModusToolbox™ Setup program. For more details, refer to the Dashboard user guide.

3 Advanced installation instructions

See also Advanced ModusToolbox™ installation instructions KBA for various advanced installation cases.


3.1 Installing using non-silent option

The base tools package installs in your home directory on Windows by default. If your user home directory contains spaces or illegal characters, or if you need to install for all users, you will need to select the **Non-silent install** option on the installer page of the Setup program.

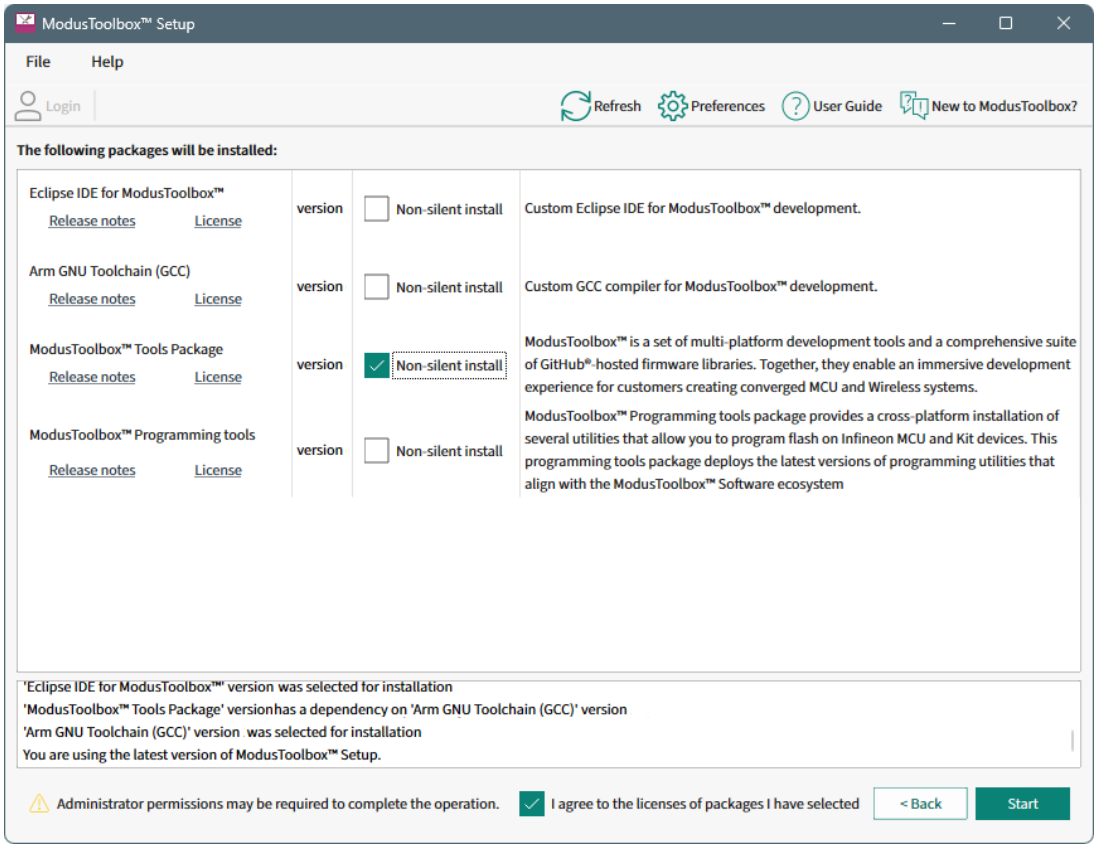

If possible, create a new user account and user home directory that doesn't contain spaces or illegal characters. Then, you can just use the default process for that account. If you cannot create a new user home directory, then you must perform some extra installation steps.


When the Setup program begins to install the tools package, it will revert to the package installer program.

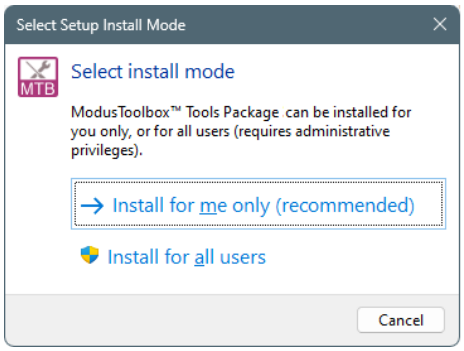


We recommend to install for the current user, but if you need to install for all users, then Admin permission will be required. Follow the instructions in this section to proceed.

Accept the license agreement and click **Next**.

3 Advanced installation instructions

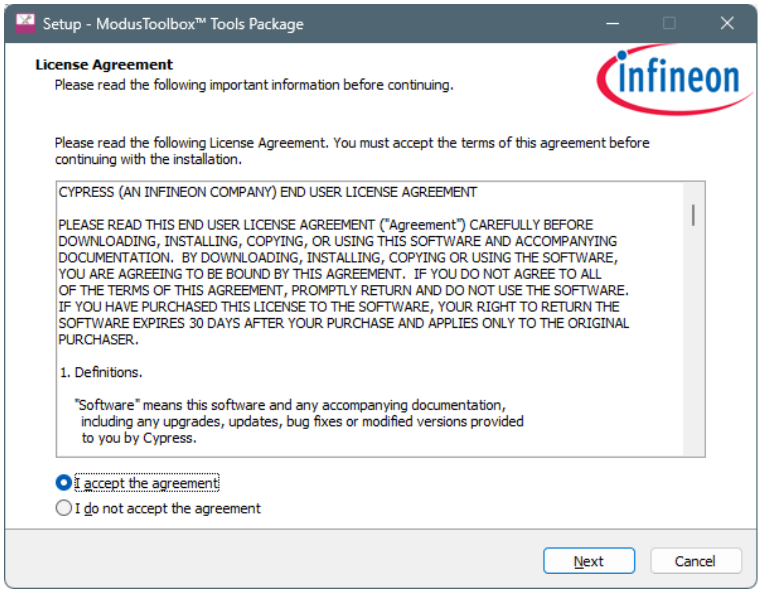


Choose the **Custom Installation** option, and click **Next**.

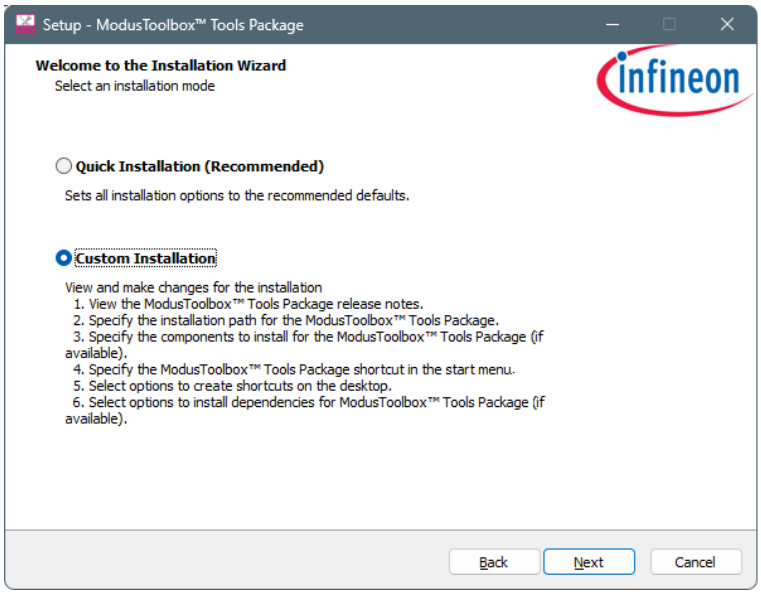


Review the user guide, release notes, and other information on Infineon.com, as needed, and click **Next**.

3 Advanced installation instructions

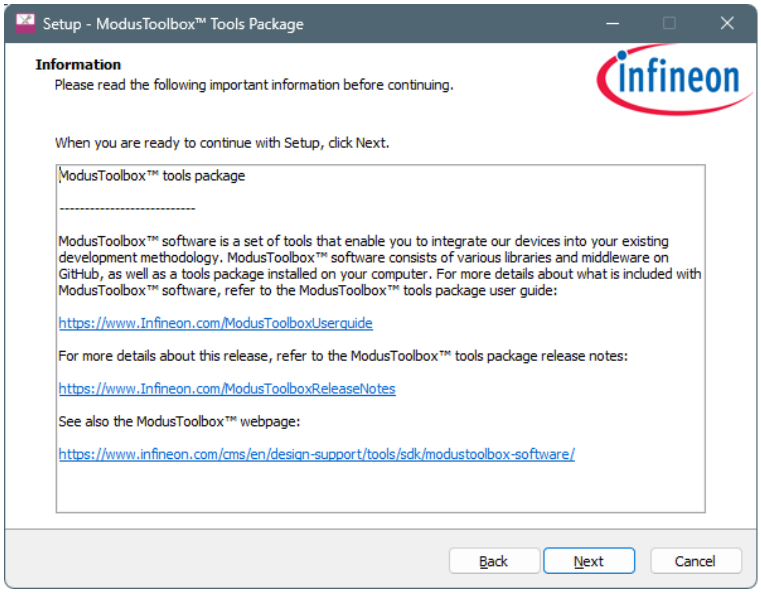


On this next screen, specify the location to install the tools package.

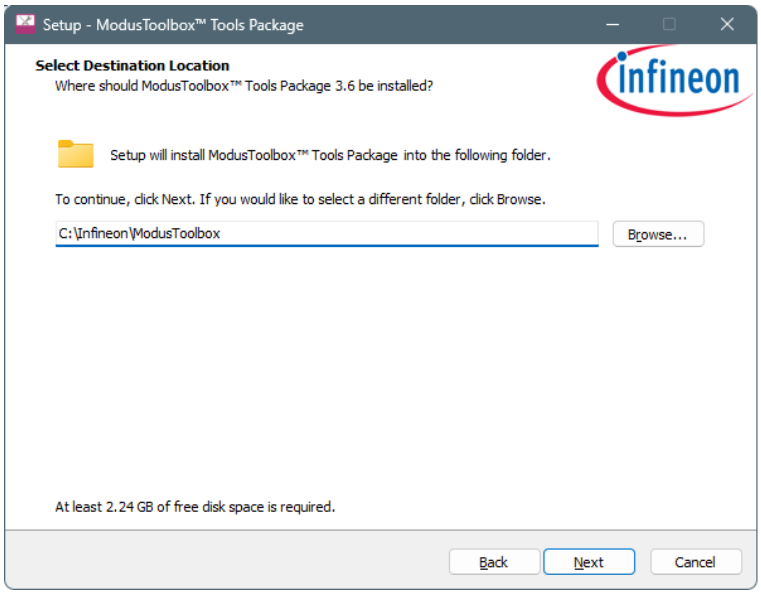

Specify a path that does not include spaces. For example: *C:\Infineon\ModusToolbox*


Any path without spaces or illegal characters will work. The same is true if you install for all users in a non-default user home directory.

Click **Next** and a notice like the following will display to confirm that you are installing in a non-default location:

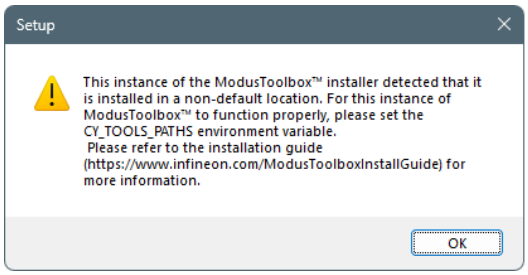


Click **OK** to proceed.

3 Advanced installation instructions

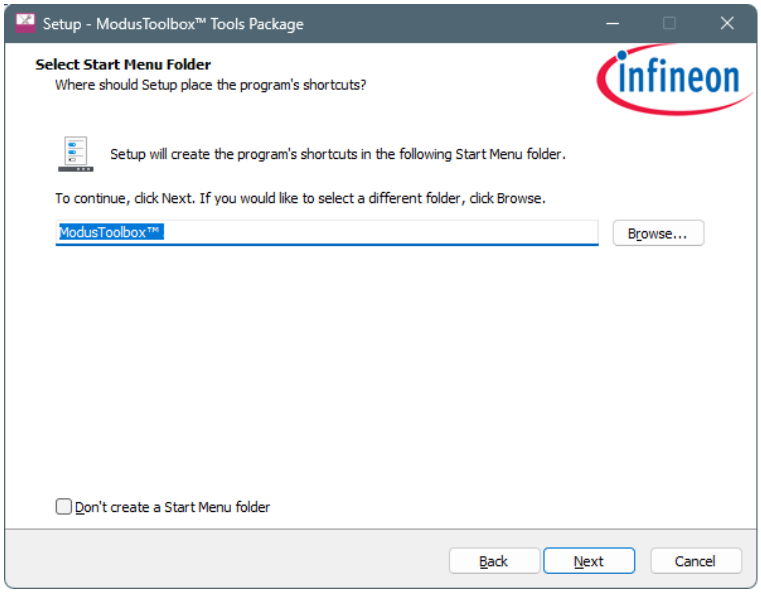


Specify the **Start** menu folder options, if needed, and click **Next**.

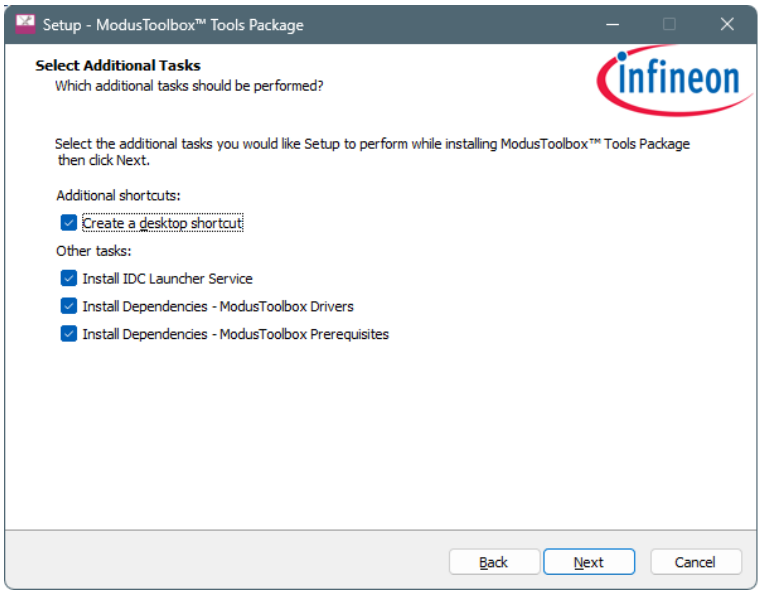

Select or deselect various install options and click **Next**.

***Note**: If you have never installed ModusToolbox™ software before, leave the **Other tasks** selected to ensure a correct installation.*

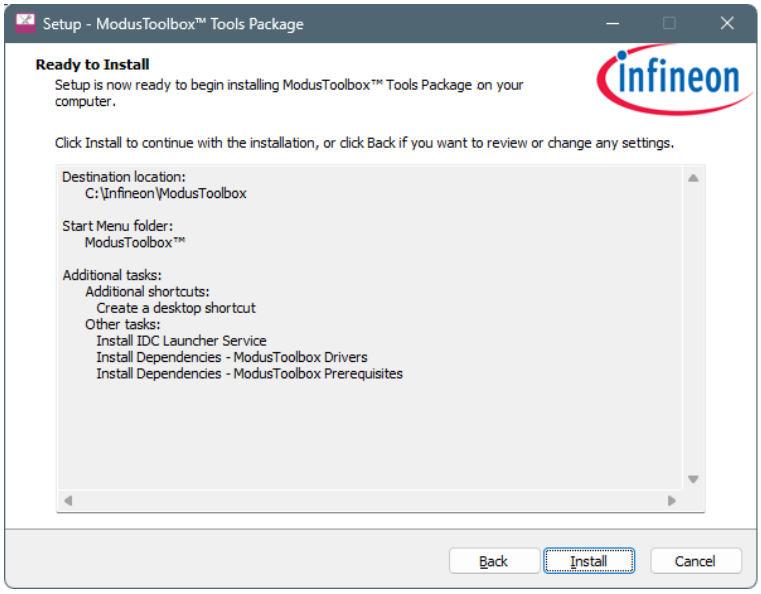

Review the settings and click **Install** to begin the installation, or click **Back** to go back to previous pages to make changes.

After installation is complete, review and follow the instructions in the following subsections as applicable.

3.1.1 Create directories

When installing in a non-default location, you should create a couple directories. You can choose any path as long as it doesn't contain spaces.

1. Create a hidden "dot" directory named "**.**modustoolbox" for variable locations described later in this section. For example:

   *C:\MyPath**.***modustoolbox*

2. Also, create a directory to store your workspaces. For example:

   C:\MyPath\mtb-projects

3.1.2 Create variable to specify the path to Tools

Because you are installing ModusToolbox™ into a non-default location, you need to specify the path to your "tools" directory using an Environment Variable. Open the Environment Variables dialog, and create a new System or User Variable, depending on your installation type (current user or all users). For example:

```
CY_TOOLS_PATHS = C:/MyPath/ModusToolbox/tools_[version]
```

***Note**: Use a Windows-style path (not Cygwin-style, like /cygdrive/c/). Also, use forward slashes.*

3.1.3 Create variable to specify the global path

You also need to specify the global path using an Environment Variable. Open the Environment Variables dialog, and create a new System or User Variable, depending on your installation type (current user or all users). For example:

```
CY_GETLIBS_GLOBAL_PATH = C:/MyPath/.modustoolbox/global
```

***Note**: Use a Windows-style path (not Cygwin-style, like /cygdrive/c/). Also, use forward slashes.*

***Note**: You can set this value using the Settings program instead of using a environment variable.*

3.1.4 Specify the custom path to use for Local Content Storage

If you use Local Content Storage (LCS) to enable work without access to the Internet, set this variable to specify where the content will be stored. For example:

```
MTB_LOCAL_CONTENT_PATH = C:/MyPath/.modustoolbox/lcs
```


***Note**: Use a Windows-style path (not Cygwin-style, like /cygdrive/c/). Also, use forward slashes.*

***Note**: You can set this value using the Settings program instead of using a environment variable.*

4 Updating versions instructions

Various tools and packages are updated on different schedules and release cycles. You can use the Setup program to update these in two basic ways:

- **Auto update**: Use this option if you have an older version of the ModusToolbox™ tools package installed to update it and associated packages to the latest versions.
- **Manual update**: Use this option to manually select various packages to update.

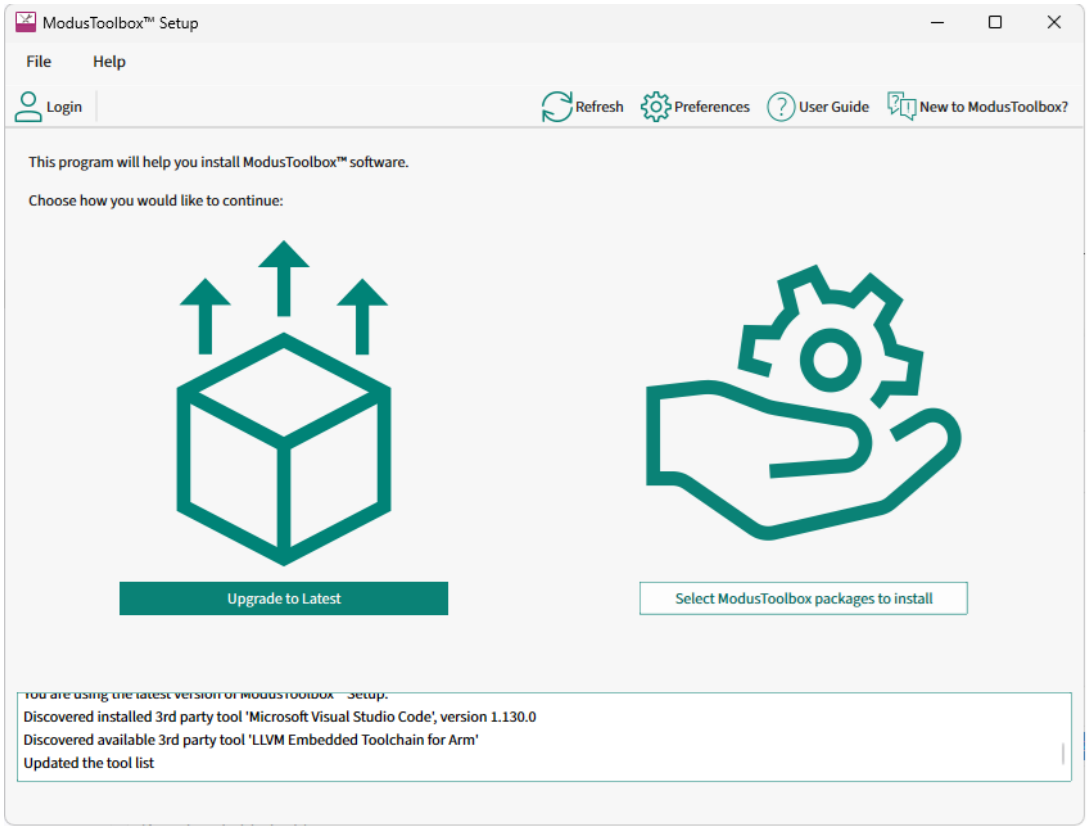


Auto update

If you have an older version of the ModusToolbox™ tools package installed, use the **Update to Latest** button to automatically select it and associated packages to be updated. It will also detect other older packages not directly related to the ModusToolbox™ tools package and select them for update."

This opens the screen showing which tools and packages will be updated.

4 Updating versions instructions

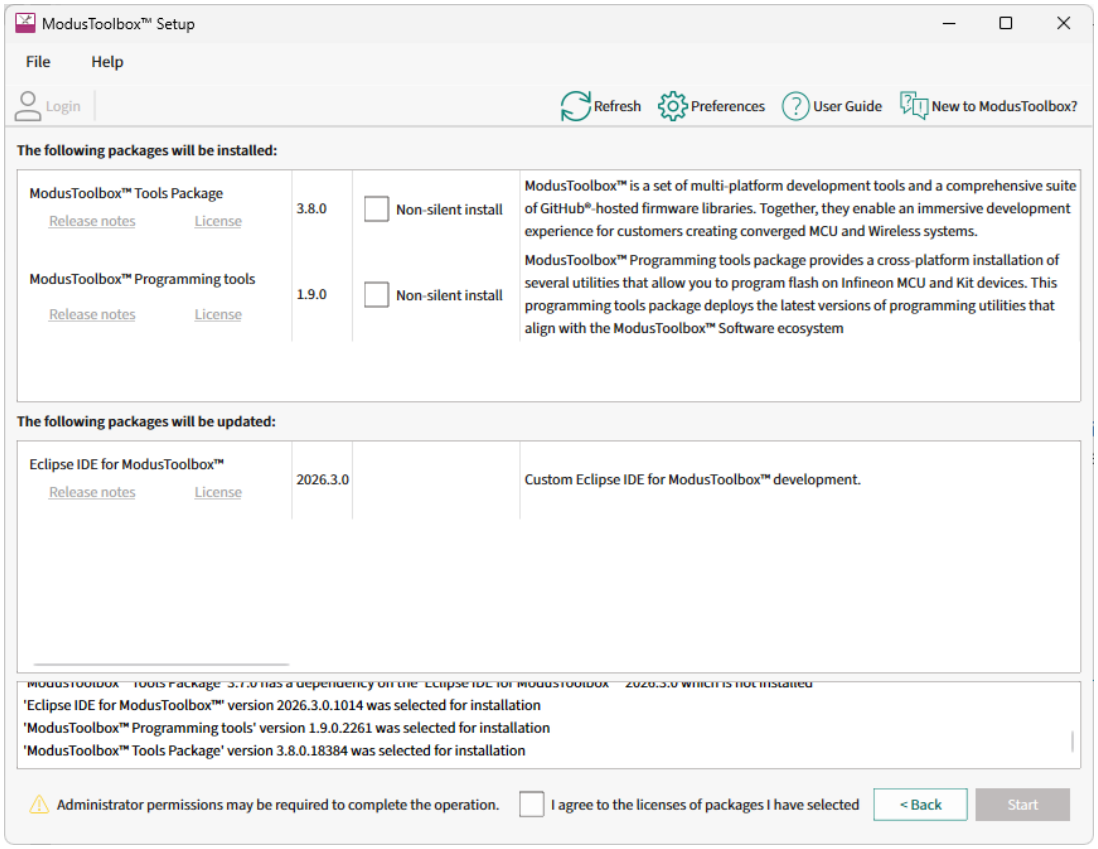

***Note**: The Setup program will install new versions of some tools and packages in parallel with their previous versions, and it will replace current versions of other tools and packages with the latest version.*


The process to update tools and packages from this point is the same as installing them initially. Follow the instructions on the various screens.

Manual update

To manually select which tools and packages to update, click the **Select ModusToolbox packages to install** button.

This opens the main Setup program page, where you can select tools and packages and specific versions of them. Items that have updated versions include an icon next to the version as shown in the following image.

4 Updating versions instructions

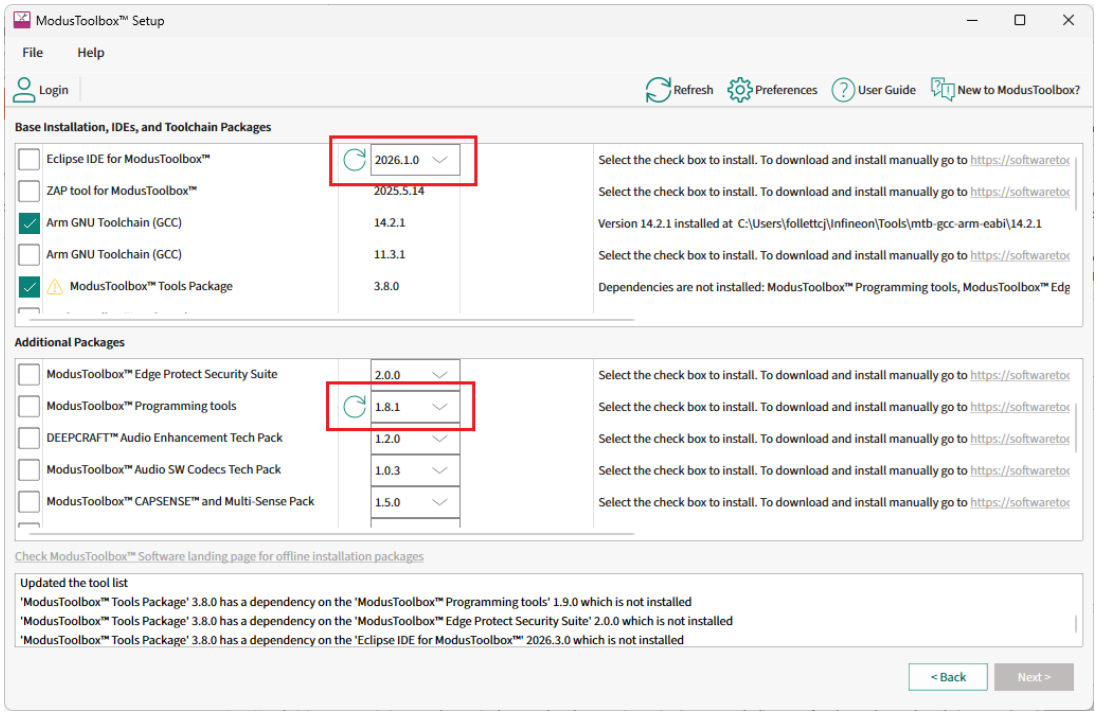

Use the pull-down menu to select the desired version, and then select the check box next to it. This will enable the **Next >** button to proceed with the update.

The process to update tools and packages from this point is the same as installing them initially. Follow the instructions on the various screens.

5 Setup program GUI description

The main GUI window of the ModusToolbox™ Setup program contains the following elements:

- Main menu
- Main toolbar
- Packages view
- Log panel

5.1 Menus

The main application menu consists of multiple menu item groups as defined below.

5.1.1 File

The **File** menu consists of the following menu items:

Menu item	Description
Login / Logout	The login function provides access to installable packages from the IDC. The login is the same as the IDC login. If you don't already have an account, you can create one at https://community.infineon.com.
Refresh	Checks the server for any updates and refreshes the Setup program.
Show Downloads	Opens a folder on disk to show the various downloaded executable files for the packages that were selected.
Preferences	Opens the Preferences dialog.
Exit	Exits the ModusToolbox™ Setup program.

5.1.2 Help

The Help menu consists of the following menu items:

- **View Help** – Opens this document.
- **Check for updates** – Manually checks to see if there are any updates to the Setup program itself. The tool can be configured to check for updates on startup. If updates are available, the ModusToolbox™ Setup Installer package is downloaded and executed once the program is closed.
- **About** – Opens the About box for version information, with links to open https://www.infineon.com, the current session log file, and the Infineon Developer Center Launcher Service log file.

5.2 Main toolbar


The main toolbar consists of the following:

- **Login** / **Logout**: While **Login** is visible, **Logout** is not. When you are logged in, your email address is displayed along with the **Logout** button.
- **Refresh**: initiates a refresh of the list of available packages.
- **Preferences**: opens the Preferences dialog.
- **User Guide**: opens this document.
- **New to ModusToolbox?**: opens an introductory document for new users.

5.3 Packages view

The Setup program gathers package data from the IDC online and local tools registry, and then displays all installed and available packages along with version information. For the purposes of this document, a package includes ModusToolbox™ platform tools, patches, packs, programming tools, and other tools such as the Memory Analyzer. The Setup program displays a list of the available packages, grouped by two categories:

- **Base Installation, IDEs, and Toolchain Packages**: This includes the ModusToolbox™ tools packages, Eclipse, VS Code, and GCC.
- **Additional Packages**: This includes all other packages relevant to the ModusToolbox™ ecosystem, including programming tools, technology packs, early access packs, and auxiliary tools.

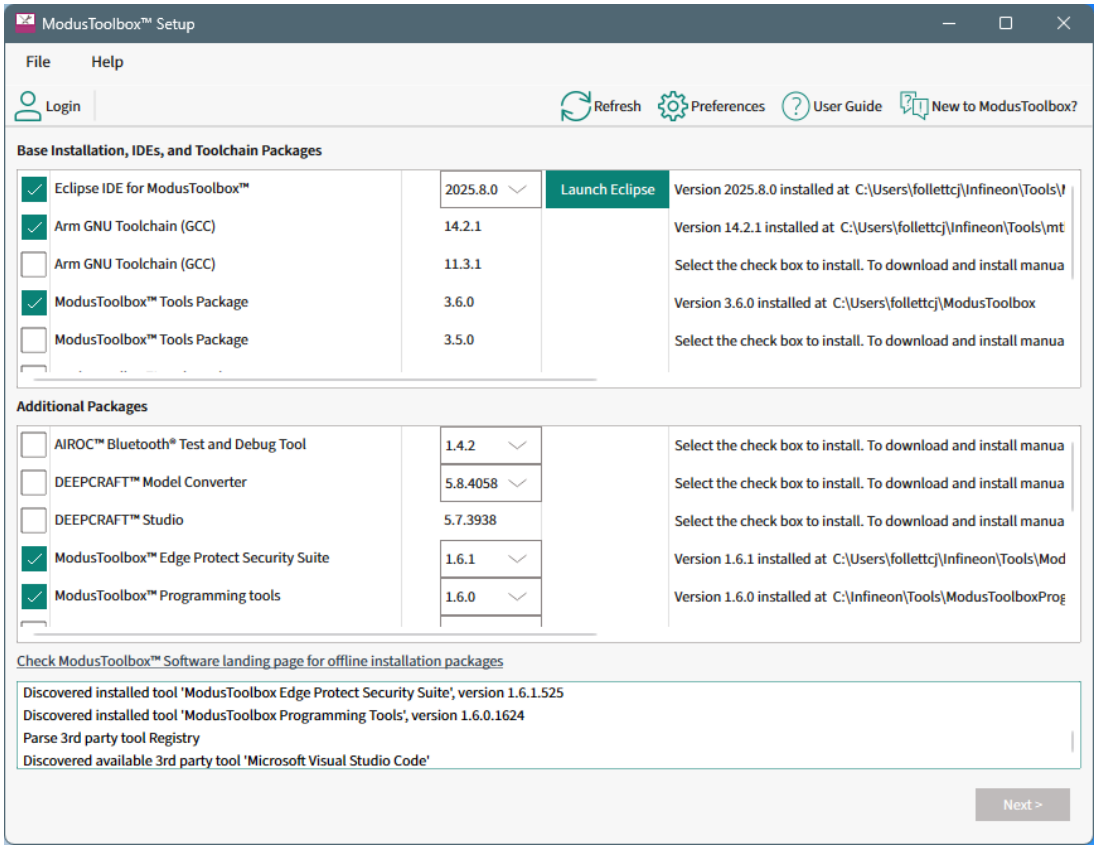

Some of the packages require you to be logged in to download and install, while others do not.

As you select various packages to install, the description on the right describes the action to take next. Installed packages show the path installed, and also provide a tooltip showing the path.

5.4 Log panel


The log panel area displays the information messages relevant for you. Examples of events that produce messages to the panel view:

- Logged in/logged out
- Completed/failed downloading the tool data from the online tool registry
- Package was selected/deselected in the tool selection view
- Dependent package version was changed (to satisfy the updated tool dependency constraints)
- Tool configuration (installation mode, target directory was changed)
- Tool download started/finished
- Tool installation/uninstallation started/finished

See How to collect logs in the troubleshooting section.

5.5 Preferences dialog

You can open the Preferences dialog from the main menu or main toolbar button.

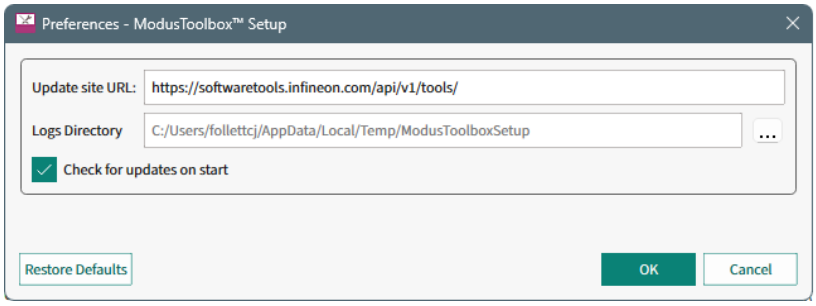

The following settings are available:

- **Update site URL**: The address of the IDC Online Tools registry. Usually there is no need to customize this address to a non-default URL.
- **Logs Directory**: The path to the directory where log files are stored. By default, this is the system temporary directory.

  ***Note**: After choosing a directory for logs, the program will create a "ModusToolboxSetup" sub-folder there where log files are kept.*

- **Check for updates on start**: disable this option to prevent the program from automatically checking for an update at each start.

Use the **Restore Defaults** button to revert the options back to their default values.

6 Troubleshooting

For help with various problems, see Troubleshooting ModusToolbox™ Setup program errors.

6.1 How to collect logs

If any errors occur when running the program, ModusToolbox™ Setup and Infineon Developer Center Launcher / Launcher Service, logs may be invaluable for resolving possible issues. To collect the ModusToolbox™ Setup current-session log, go to **Help > About > Log(s)**. Logs from previous sessions can be found as follows:

OS	Log directory path
Windows (Current User)	*%USERPROFILE%/AppData/Local/Temp/ModusToolboxSetup*
Linux™	*$HOME/tmp/ModusToolboxSetup*
macOS	*/private/var/folders/[some tmp folder]/ModusToolboxSetup*

***Note**: Since logs are stored in a temporarily location, they will be deleted on MacOS and Linux™ on reboot. To prevent deletion, you can change the directory where logs are stored in the Preferences dialog.*

If Infineon Developer Center is installed, the logs can be accessed via the **Help > Contact us > Generate Support Document** option. If only the Infineon Developer Center Launcher Service is installed, logs can be found as follows:

Go to **Help > About > Log(s)** and click on the “IDC Launcher Service Log(s)” link to open logs in the text editor window, or find the logs file directly in:

OS	Log directory path
Windows (Current User)	*%USERPROFILE%/AppData/Local/Infineon_Technologies_AG/Launcher-Service/resources/logs*
Linux™	*$HOME/.local/share/ Infineon_Technologies_AG/Launcher-Service/resources/logs*
macOS	*$HOME/Library/Application Support/ Infineon_Technologies_AG/Launcher-Service/resources/logs*

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2026-11-10

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2026 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

IFX-oog1712333962364

Important notice

Products which may also include samples and may be comprised of hardware or software or both ("Product(s)") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability. Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

If this document is marked as 'Preliminary', 'Target', 'Draft' or 'Proposal', Infineon reserves the right to change all information given in this document at any time without notice. Subject to the development and release of a Product for series supply by Infineon, the technical specifications of the Product are set forth in the relevant datasheet provided by Infineon without such marking.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Products or any consequences of the use thereof can reasonably be expected to result in personal injury.

However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer. Infineon expressly reserves the right to use its content for commercial text and data mining (TDM) according to applicable laws, e.g. Section 44b of the German Copyright Act (UrhG). If the Product includes security features:

Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:

The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software.

If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited.

For further information on the Product, technology, delivery terms and conditions, and prices, please contact your nearest Infineon office or visit www.infineon.com.