

How To Use Customize Build For Softune WB

From Softune Workbench V30L26 on a new feature is available to add tools into the IDE .With the 'Customize Build' function, the customer is able to add useful tools into the environment of Softune Workbench, which will automatically start by the Workbench.


1 Introduction

From Softune Workbench V30L26 on a new feature is available to add tools into the IDE of Fujitsu. With the 'Customize Build' function, the customer is able to add useful tools into the environment of Softune Workbench, which will automatically start by the Workbench. The start point can be defined before or after the compiler or assembler etc. is start.

2 Add Tool into Softune Workbench:

Before this menu point is available a project has to be opened. The [Figure 1](#) shows the 'setup customize build' window. This menu entry can be find under 'Project' at the main menu.

Figure 1. Window of the Customize Build feature

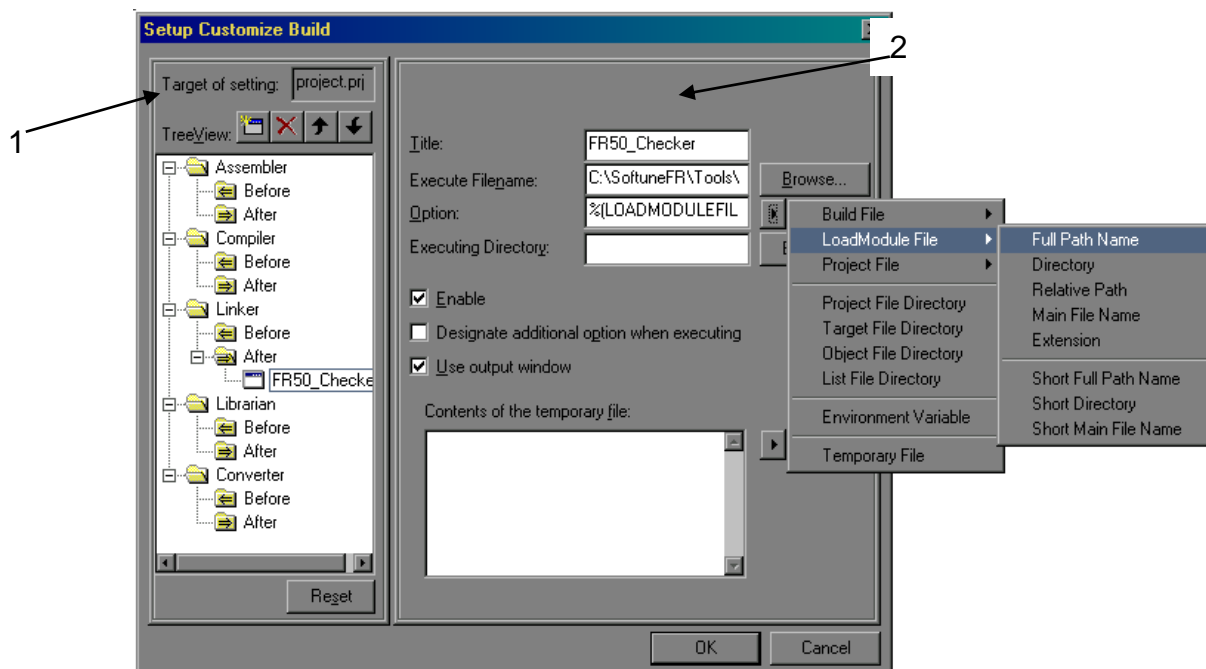

First select the point the new tool should be started. Then click on the new button (see no. 1) beneath the project name. The next step is to enter the desired name for the new tool in the first text box (see no. 2). In the second text box, which is labelled with 'Execute Filename' the .exe file of the tool has to be selected and entered there. If the tool is copied to the /bin directory of the Workbench, this field can be skipped. Because the /bin directory is the default setting in the Develop Environmental. The third text box allows to select the type of file which should be used by the tool (*.abs,*.obj,*.prj etc.). For example, the figure 1 shows how the *.abs file could be used by a tool. It is recommended to set this to 'Full Path Name' to avoid problems or wrong red files when the project is located to another directory. The last text box defines the path where the file, which the tool will be use, can be find. This can be skipped when the project is likely to be moved to another directory. Select the two check-boxes as show in the figure 1. The output of the tool will be shown in the output window of Softune Workbench.

The setting will be stored in the *.prj file when the project is closed.

Document History

Document Title: AN205224 - How to use Customize Build for Softune WB

Document Number: 002-05224

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	-	MEN	10/06/2000	V1.0, New Application Note
		MEN	10/07/2000	V1.1, Made some small changes in the text
*A	5082374	YUIS	01/12/2016	Converted Spansion Application Note "MCU-AN-391029-E-V11" to Cypress format
*B	5876037	AESATMP9	09/07/2017	Updated logo and copyright.
*C	6036260	YOST	01/18/2018	Updated the Sales information and legal. Completing Sunset Review.

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Community](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2000-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spanion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spanion, the Spanion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.