

IRFM9240 (JANTX2N7237)

PD-90497J

Power MOSFET

Thru-Hole (TO-254AA)

-200V, -11A, P-channel, HEXFET™ MOSFET Technology

Features

- Simple drive requirements
- Hermetically sealed
- Electrically isolated
- Dynamic dv/dt rating
- Light Weight
- ESD rating: Class 2 per MIL-STD-750, Method 1020

Potential Applications

- DC-DC converter
- Motor drives

Product Summary

- **BV_{DSS}** : -200V
- **I_D** : -11A
- **$R_{DS(on),max}$** : 0.51Ω
- **$Q_{G,max}$** : 60nC
- **REF**: MIL-PRF-19500/595



Product Validation

Qualified to JANS screening flow according to MIL-PRF-19500 for space applications

Description

HEXFET MOSFET technology is the key to IR HiRel advanced line of power MOSFET transistors. The efficient geometry design achieves very low on-state resistance combined with high transconductance. HEXFET transistors also feature all of the well-established advantages of MOSFETs, such as voltage control, very fast switching and electrical parameter temperature stability. They are well-suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers, high energy pulse circuits, and virtually any application where high reliability is required. The HEXFET transistor's totally isolated package eliminates the need for additional isolating material between the device and the heat sink. This improves thermal efficiency and reduces drain capacitance.

Ordering Information

Table 1 Ordering options

Part number	Package	Screening Level
IRFM9240	TO-254AA	COTS
JANS2N7237	TO-254AA	JANS
JANTX2N7237	TO-254AA	JANTX
JANTXV2N7237	TO-254AA	JANTXV

IRFM9240 (JANTX2N7237)
Power MOSFET Thru-Hole (TO-254AA)

Table of contents

Table of contents

Features 1

Potential Applications..... 1

Product Validation..... 1

Description 1

Table of contents..... 2

1 Absolute Maximum Ratings 3

2 Device Characteristics 4

2.1 Electrical Characteristics4

2.2 Source-Drain Diode Ratings and Characteristics5

2.3 Thermal Characteristics5

3 Electrical Characteristics Curves..... 6

4 Test Circuits 9

5 Package Outline.....10

Revision history.....11

Absolute Maximum Ratings

1 Absolute Maximum Ratings

Table 2 Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
$I_{D1} @ V_{GS} = -10V, T_C = 25^{\circ}C$	Continuous Drain Current	-11	A
$I_{D2} @ V_{GS} = -10V, T_C = 100^{\circ}C$	Continuous Drain Current	-7.0	A
$I_{DM} @ T_C = 25^{\circ}C$	Pulsed Drain Current ¹	-44	A
$P_D @ T_C = 25^{\circ}C$	Maximum Power Dissipation	125	W
	Linear Derating Factor	1.0	W/°C
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy ²	500	mJ
I_{AR}	Avalanche Current ¹	-11	A
E_{AR}	Repetitive Avalanche Energy ¹	12.5	mJ
dv/dt	Peak Diode Reverse Recovery ³	-5.0	V/ns
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	°C
	Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)	
	Weight	9.3 (Typical)	
			g

¹ Repetitive Rating; Pulse width limited by maximum junction temperature.

² $V_{DD} = -50V$, starting $T_J = 25^{\circ}C$, $L = 8.3mH$, Peak $I_L = -11A$, $V_{GS} = -10V$

³ $I_{SD} \leq -11A$, $di/dt \leq -150A/\mu s$, $V_{DD} \leq -200V$, $T_J \leq 150^{\circ}C$

Device Characteristics

2 Device Characteristics

2.1 Electrical Characteristics

Table 3 Static and Dynamic Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (Unless Otherwise Specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	-200	—	—	V	$V_{GS} = 0V, I_D = -1.0mA$
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	-0.2	—	V/ $^\circ\text{C}$	Reference to 25°C , $I_D = -1.0mA$
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance	—	—	0.51	Ω	$V_{GS} = -10V, I_{D2} = -7.0A^1$
		—	—	0.52		$V_{GS} = -10V, I_{D2} = -11A^1$
$V_{GS(th)}$	Gate Threshold Voltage	-2.0	—	-4.0	V	$V_{DS} = V_{GS}, I_D = -250\mu A$
G_{fs}	Forward Transconductance	4.0	—	—	S	$V_{DS} = -15V, I_{D2} = -7.0A^1$
I_{DSS}	Zero Gate Voltage Drain Current	—	—	-25	μA	$V_{DS} = -160V, V_{GS} = 0V$
		—	—	-250		$V_{DS} = -160V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Forward	—	—	-100	nA	$V_{GS} = -20V$
	Gate-to-Source Leakage Reverse	—	—	100		$V_{GS} = 20V$
Q_G	Total Gate Charge	—	—	60	nC	$I_{D1} = -11A$
Q_{GS}	Gate-to-Source Charge	—	—	15		$V_{DS} = -100V$
Q_{GD}	Gate-to-Drain ('Miller') Charge	—	—	38		$V_{GS} = -10V$
$t_{d(on)}$	Turn-On Delay Time	—	—	35	ns	$I_{D1} = -11A^{**}$ $V_{DD} = -100V$ $R_G = 9.1\Omega$ $V_{GS} = -10V$
t_r	Rise Time	—	—	85		
$t_{d(off)}$	Turn-Off Delay Time	—	—	85		
t_f	Fall Time	—	—	65		
$L_s + L_D$	Total Inductance	—	6.8	—	nH	Measured from Drain lead (6mm / 0.25 in from package) to Source lead (6mm/ 0.25 in from package) with Source wire internally bonded from Source pin to Drain pad
C_{iss}	Input Capacitance	—	1200	—	pF	$V_{GS} = 0V$
C_{oss}	Output Capacitance	—	570	—		$V_{DS} = -25V$
C_{rss}	Reverse Transfer Capacitance	—	81	—		$f = 1.0MHz$

****** Switching speed maximum limits are based on manufacturing test equipment and capability.

¹ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$

Device Characteristics

2.2 Source-Drain Diode Ratings and Characteristics

Table 4 Source-Drain Diode Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
I _S	Continuous Source Current (Body Diode)	—	—	-11	A	
I _{SM}	Pulsed Source Current (Body Diode) ¹	—	—	-44	A	
V _{SD}	Diode Forward Voltage	—	—	-5.0	V	T _J = 25°C, I _S = -11A, V _{GS} = 0V ²
t _{rr}	Reverse Recovery Time	—	—	440	ns	T _J = 25°C, I _F = -11A, V _{DD} ≤ -50V di/dt = -100A/μs ²
Q _{rr}	Reverse Recovery Charge	—	4.8	—	μC	
t _{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by L _S +L _D)				

2.3 Thermal Characteristics

Table 5 Thermal Resistance

Symbol	Parameter	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction-to-Case	—	—	1.0	$^\circ\text{C}/\text{W}$
$R_{\theta JCS}$	Case-to-Sink	—	0.21	—	
$R_{\theta JA}$	Junction-to-Ambient (Typical socket mount)	—	—	48	

¹ Repetitive Rating; Pulse width limited by maximum junction temperature.



² Pulse width $\leq 300 \mu\text{s}$; Duty Cycle $\leq 2\%$

IRFM9240 (JANTX2N7237)

Power MOSFET Thru-Hole (TO-254AA)

Electrical Characteristics Curves

3 Electrical Characteristics Curves

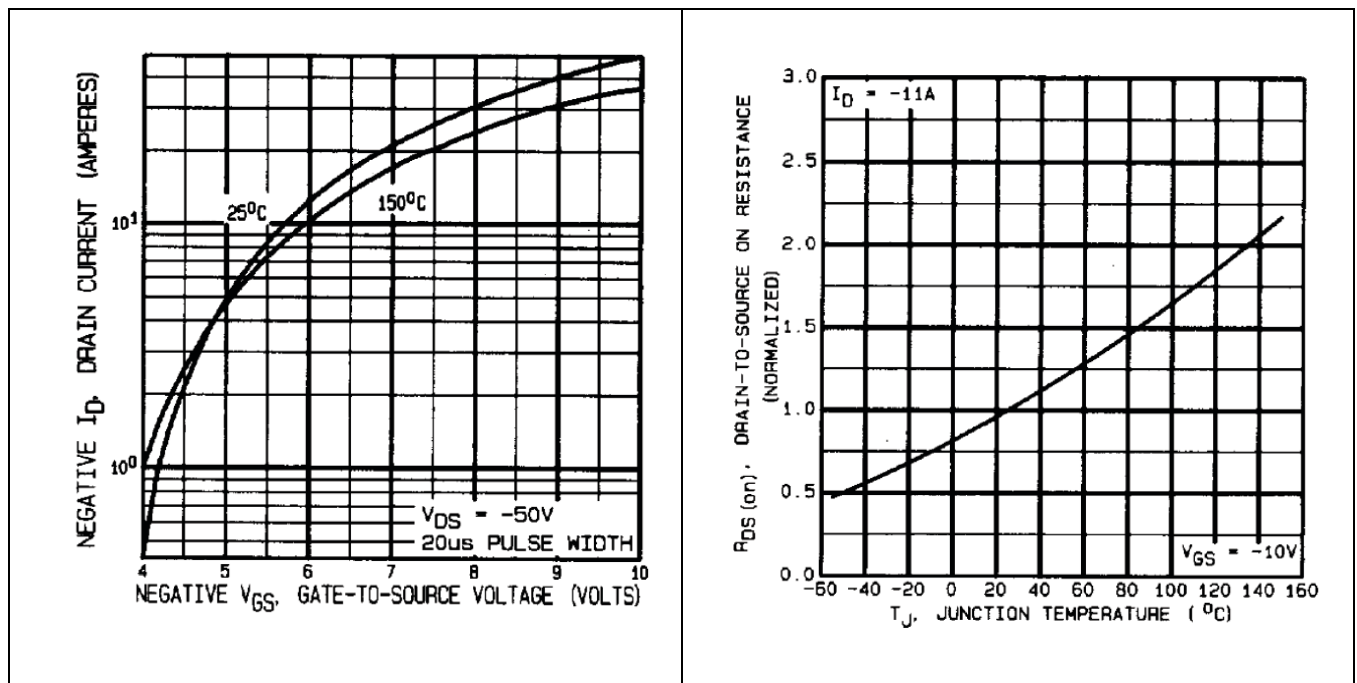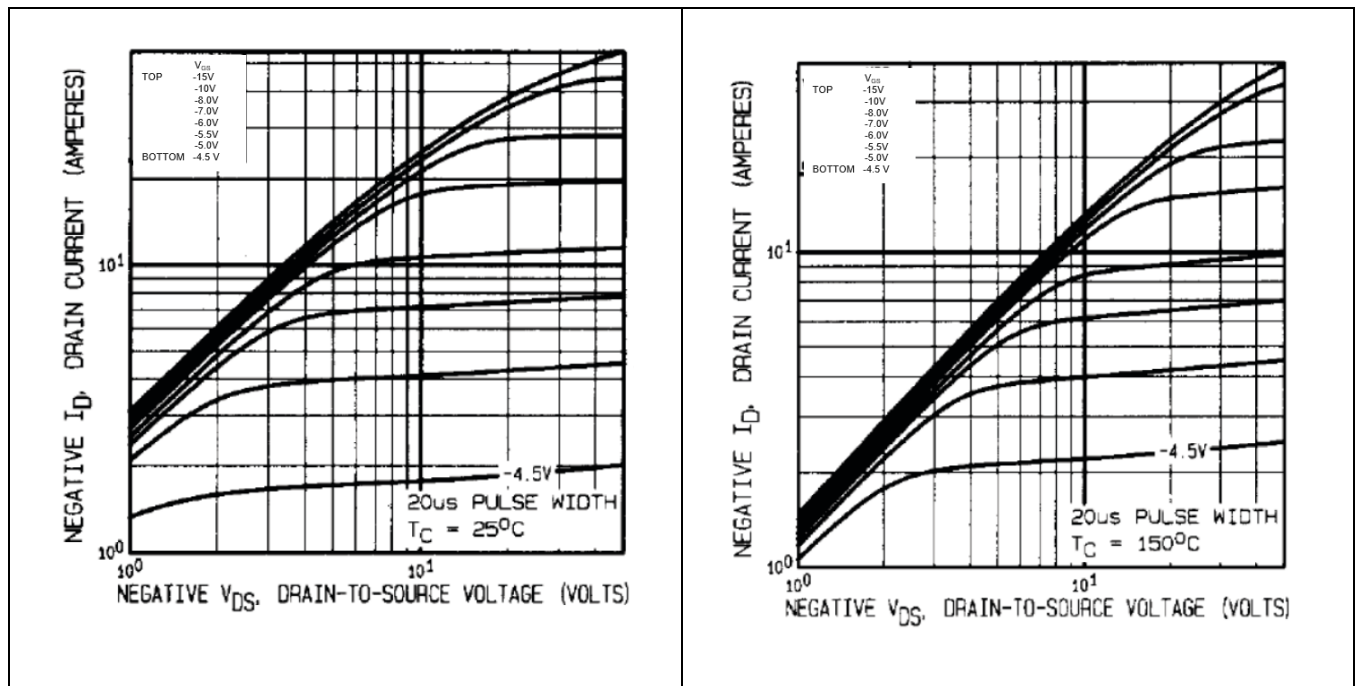

IRFM9240 (JANTX2N7237)

Power MOSFET Thru-Hole (TO-254AA)

Electrical Characteristics Curves

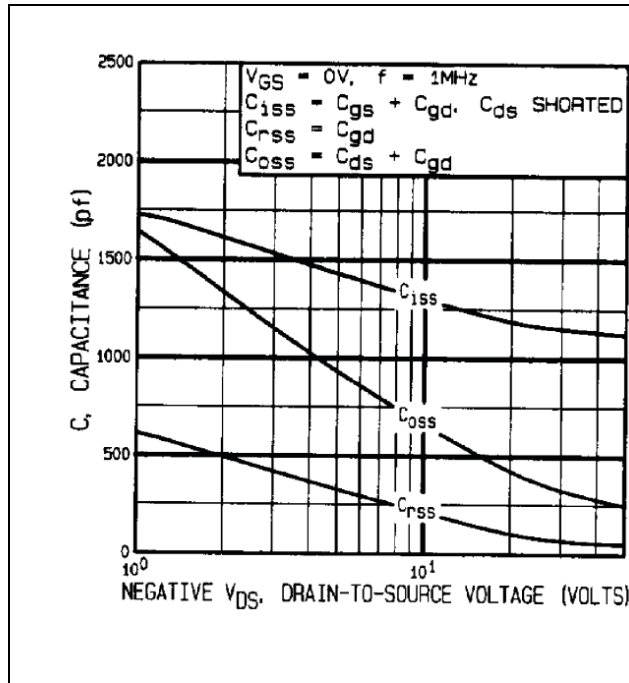


Figure 5 Typical Capacitance Vs. Drain-to-Source Voltage

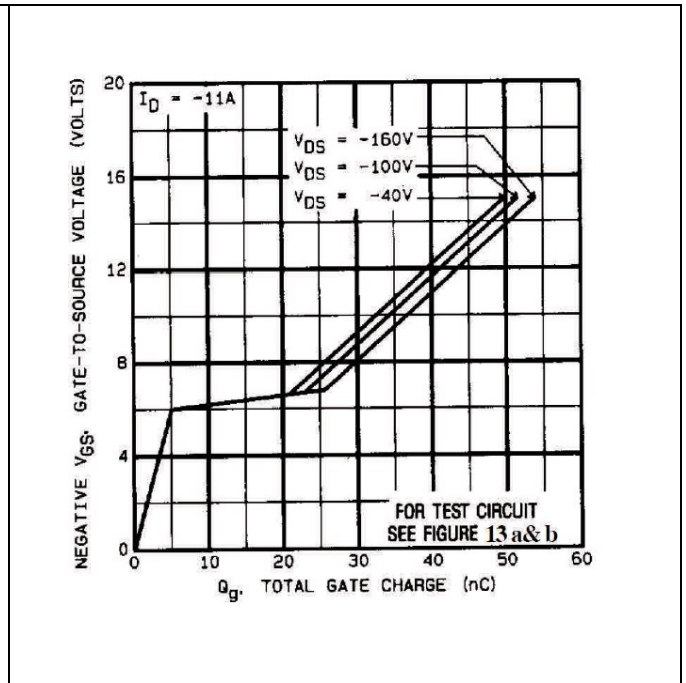


Figure 6 Typical Gate Charge Vs. Gate-to-Source Voltage

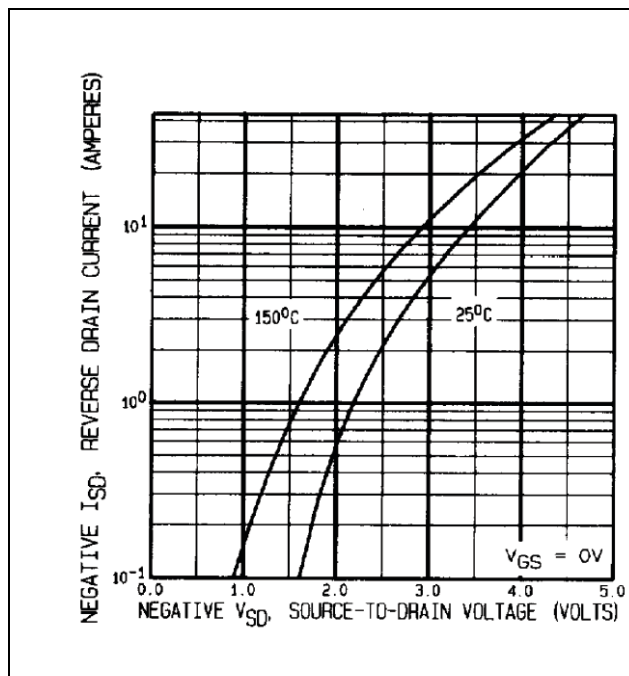


Figure 7 Typical Source-Drain Diode Forward Voltage

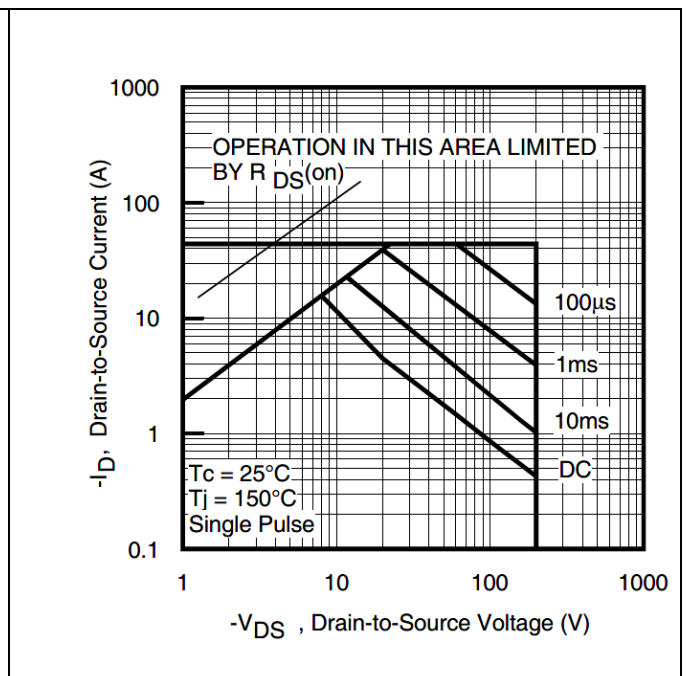


Figure 8 Maximum Safe Operating Area

IRFM9240 (JANTX2N7237)

Power MOSFET Thru-Hole (TO-254AA)

Electrical Characteristics Curves

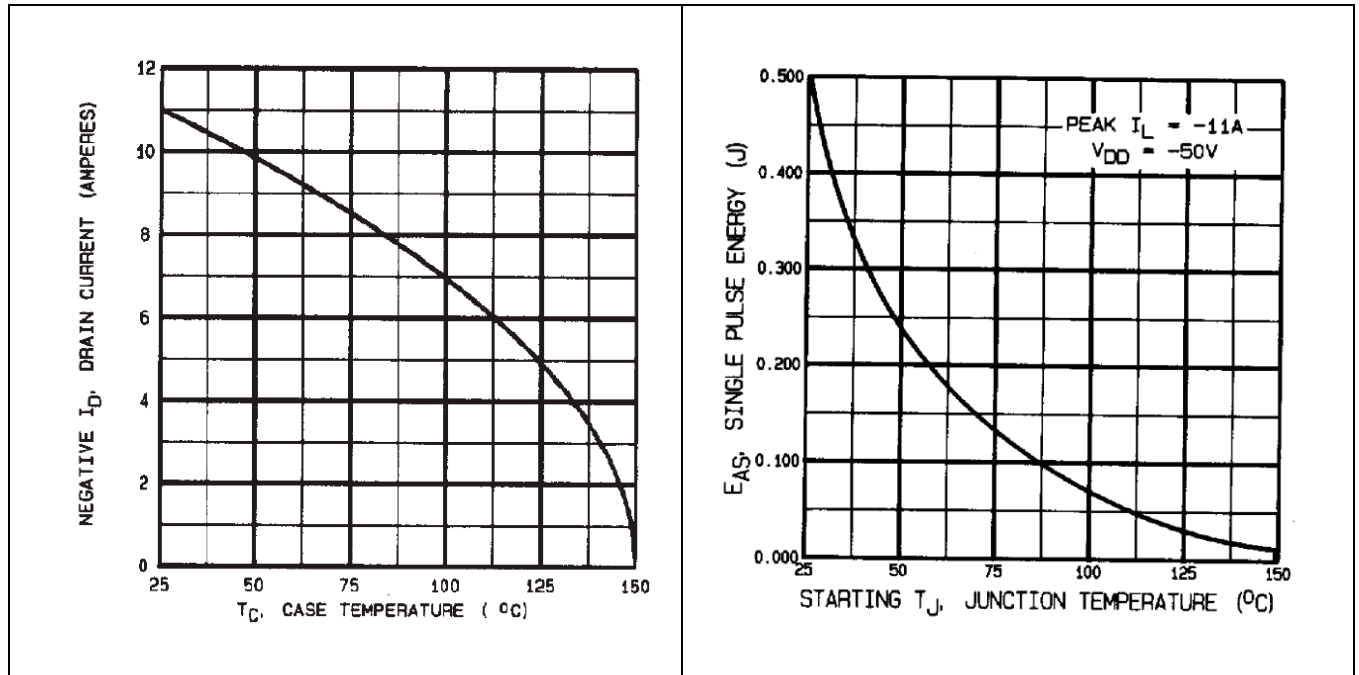


Figure 9 Maximum Drain Current Vs. Case Temperature

Figure 10 Maximum Avalanche Energy Vs. Junction Temperature

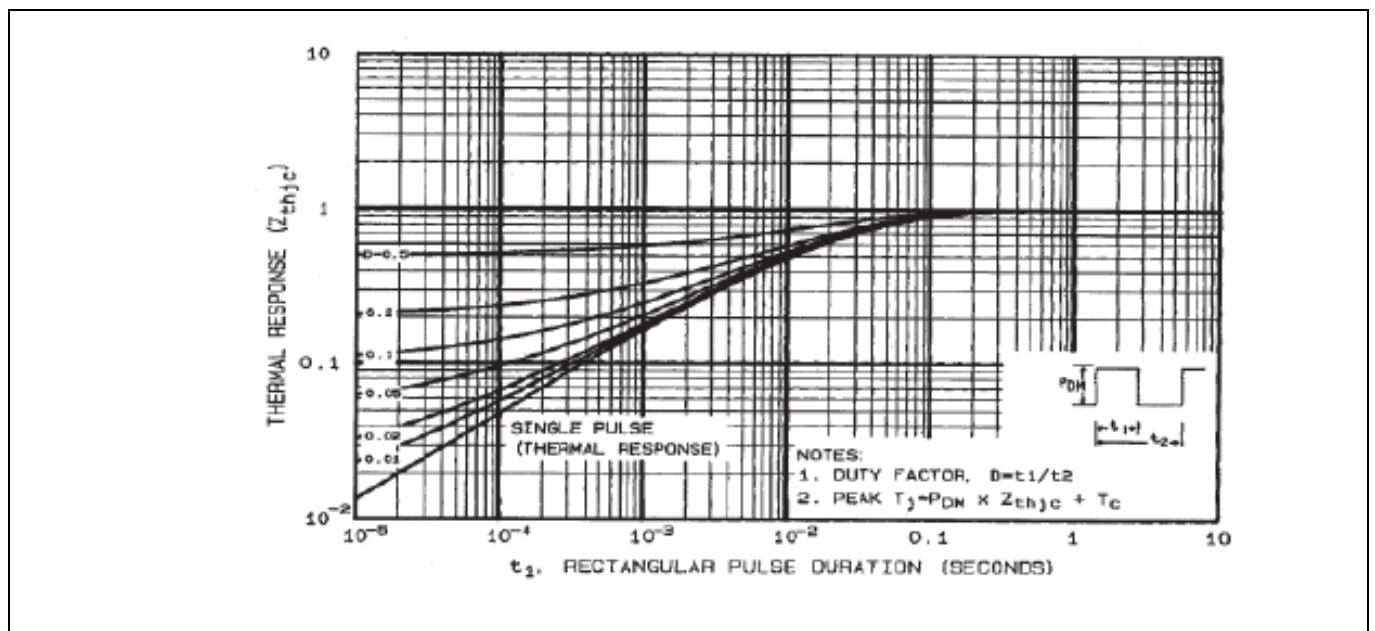


Figure 11 Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRFM9240 (JANTX2N7237)

Power MOSFET Thru-Hole (TO-254AA)

Test Circuits

4 Test Circuits

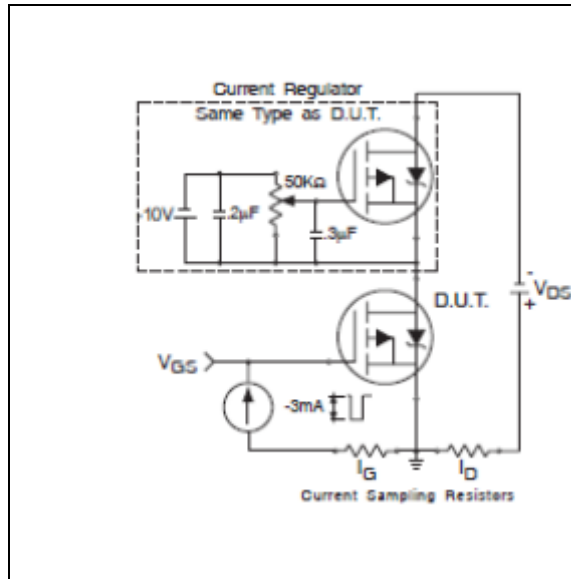


Figure 12 Gate Charge Test Circuit

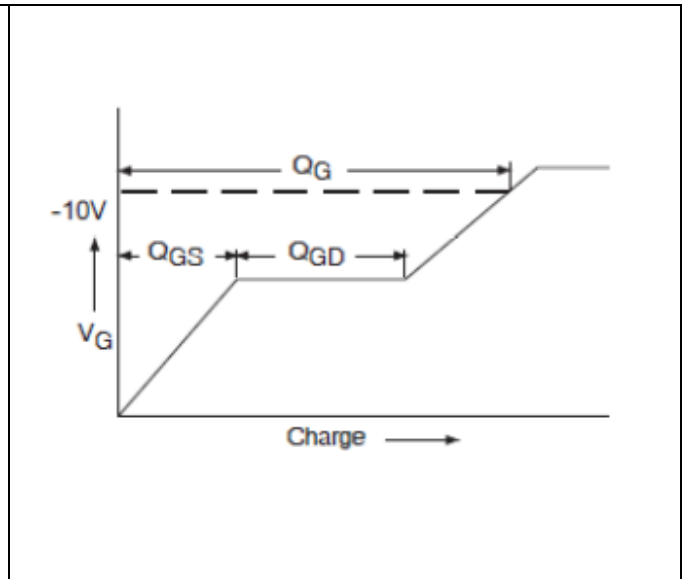


Figure 13 Gate Charge Waveform

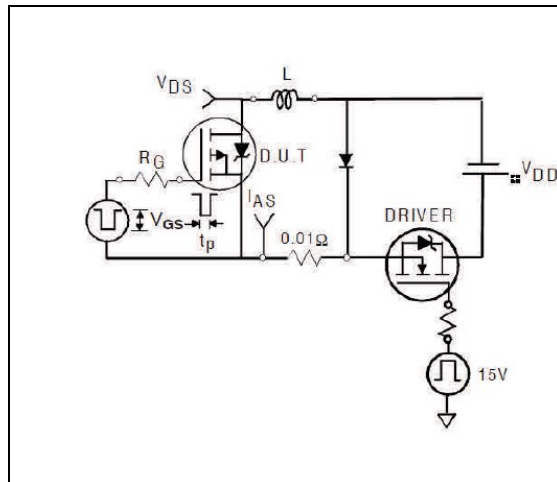


Figure 14 Unclamped Inductive Test Circuit

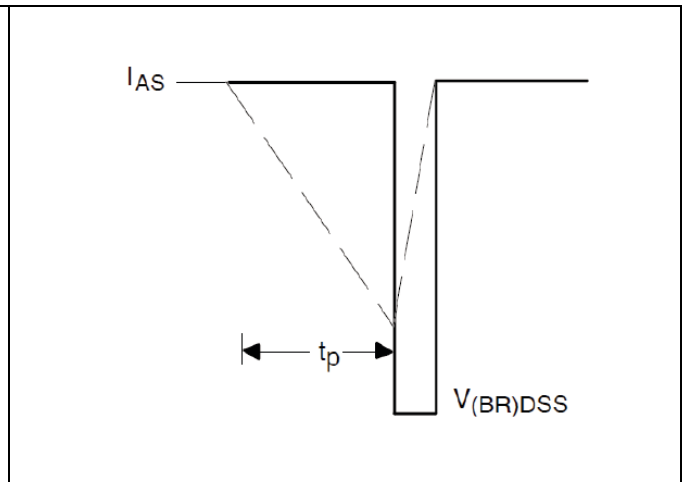


Figure 15 Unclamped Inductive Waveform

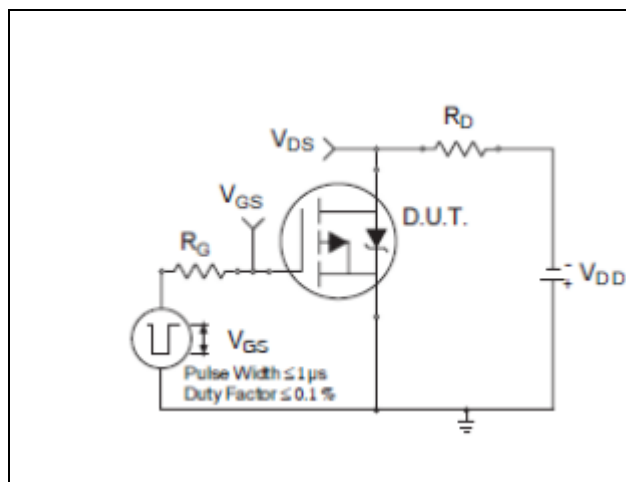


Figure 16 Switching Time Test Circuit

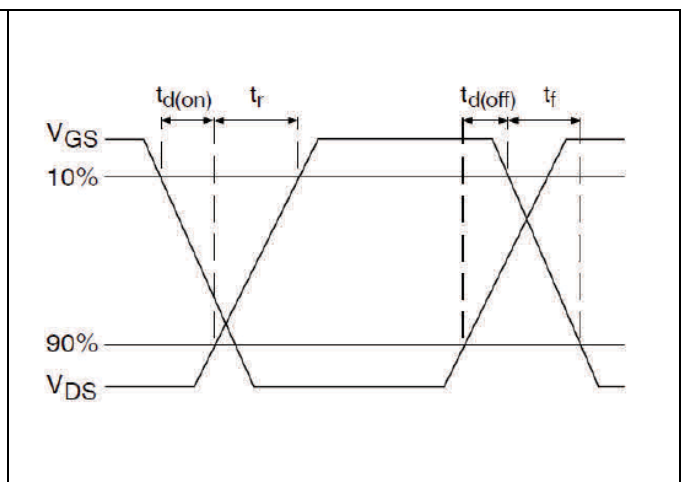


Figure 17 Switching Time Waveforms


IRFM9240 (JANTX2N7237)

Power MOSFET Thru-Hole (TO-254AA)

Package Outline

5 Package Outline

Note: For the most updated package outline, please see the website: [TO-254AA](http://www.infineon.com/toc-254aa)

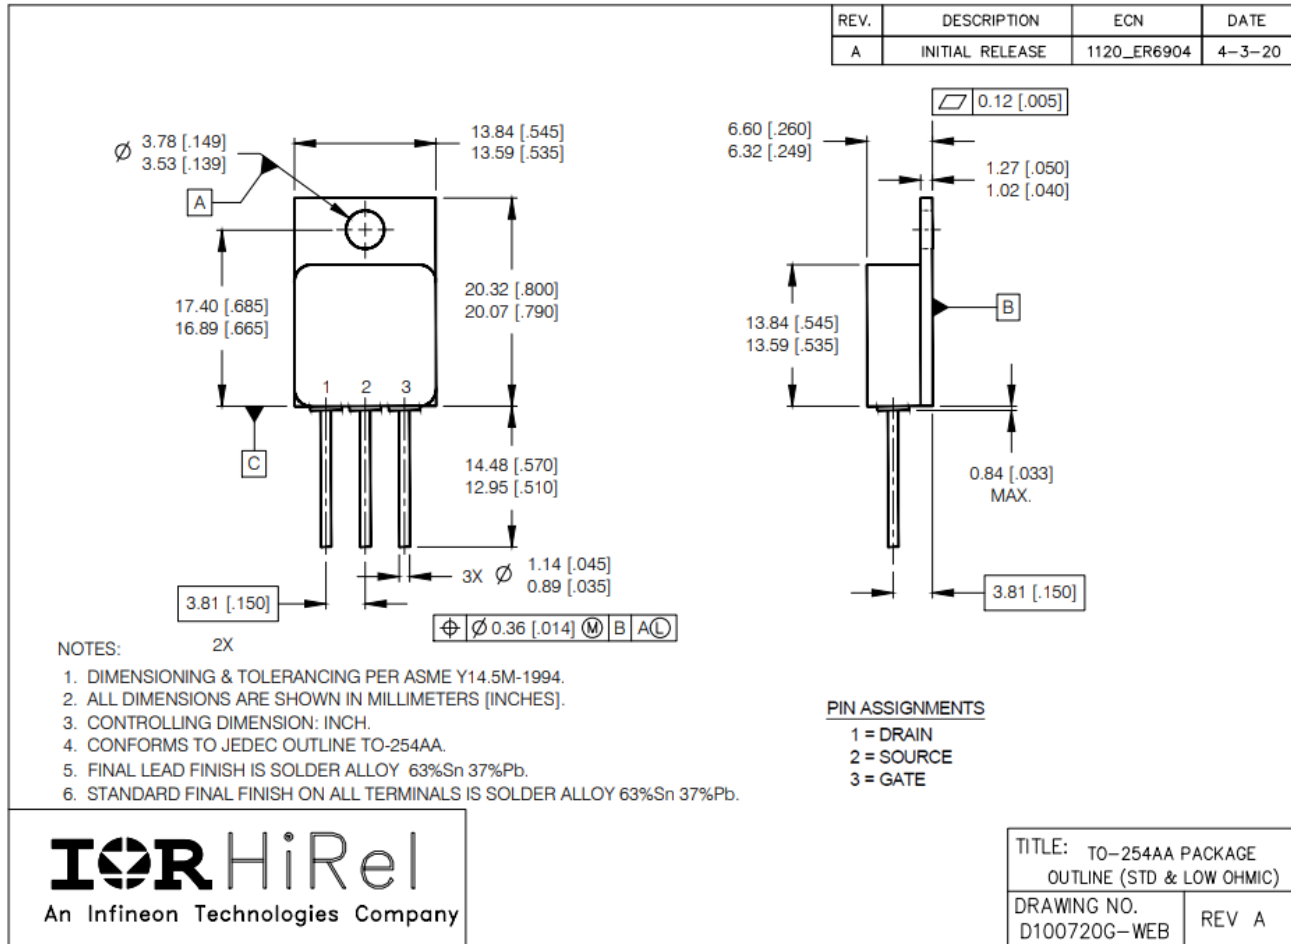

BERYLLIA WARNING PER MIL-PRF-19500

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

IRFM9240 (JANTX2N7237)
Power MOSFET Thru-Hole (TO-254AA)

Revision history

Revision history

Document version	Date of release	Description of changes
	01/31/2002	Datasheet (PD-90497E)
Rev F	11/18/2002	Added QPL Part # JANS2N7237-page1
Rev G	04/30/2014	Updated based on ECN-1120_02003
Rev H	06/22/2020	Updated based on ECN-1120_07948
Rev J	12/06/2024	Updated based on ECN-1120_10102

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-12-06

Published by

**International Rectifier HiRel Products,
Inc.**

**An Infineon Technologies company
El Segundo, California 90245 USA**

**© 2024 Infineon Technologies AG.
All Rights Reserved.**

**Do you have a question about this
document?**

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest International Rectifier HiRel Products, Inc., an Infineon Technologies company, office.

International Rectifier HiRel Components may only be used in life-support devices or systems with the expressed written approval of International Rectifier HiRel Products, Inc., an Infineon Technologies company, if failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety and effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.