

Final datasheet
CoolSiC™ 1200 V Schottky diode G5 with .XT interconnection technology

特性

- $V_{RRM} = 1200\text{ V}$ at $T_{vj} = 25^{\circ}\text{C}$
- $I_F = 20\text{ A}$
- No reverse recovery current / no forward recovery
- 高冲击电流能力
- Temperature independent switching behavior
- Low forward voltage
- dv/dt ruggedness
- Pb-free lead plating; RoHS compliant
- .XT interconnection technology for best-in-class thermal performance

可选应用

- String inverter
- Online UPS / Industrial UPS
- EV Charging
- Welding

产品认证



- Qualified for industrial applications according to the relevant tests of JEDEC47/20/22

描述

Pin definition:

Pin 1 & backside – Cathode

Pin 2 – Anode

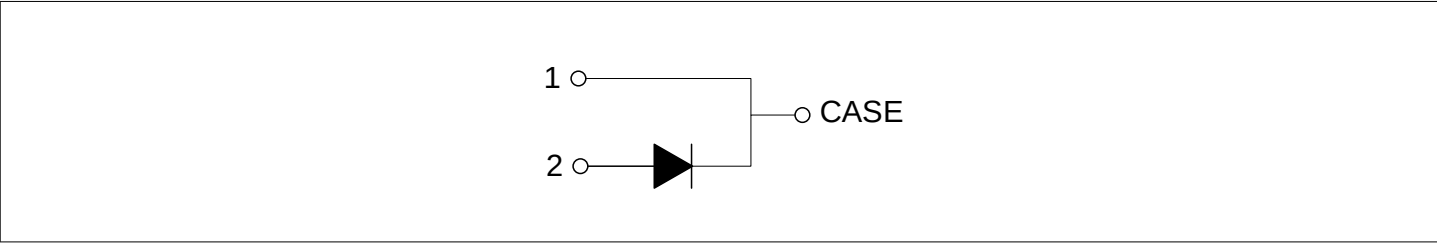

Type	Package	Marking
IDWD20G120C5	PG-TO247-2-U01	D2012C5



内容

	描述.....	1
	特性.....	1
	可选应用.....	1
	产品认证.....	1
	内容.....	2
1	封装.....	3
2	SiC Diode	3
3	特征参数图表.....	5
4	封装尺寸.....	8
	修订历史.....	9
	免责声明.....	10

1 封装

表 1 特征值

特征参数	代号	标注或测试条件	数值			单位
			最小值	典型值	最大值	
Storage temperature	T_{stg}		-55		150	°C
Soldering temperature	T_{sold}	wave soldering 1.6 mm (0.063 in.) from case for 10 s			260	°C
Mounting torque	M	M3 screw, Maximum of mounting processes: 3			0.6	Nm
Thermal resistance, junction-ambient	$R_{\text{th(j-a)}}$				62	K/W
Diode thermal resistance, junction-case	$R_{\text{th(j-c)}}$			0.44	0.57	K/W

2 SiC Diode

表 2 最大标定值

特征参数	代号	标注或测试条件		数值	单位
Repetitive peak reverse voltage	V_{RRM}	$T_{\text{vj}} \geq 25\text{ °C}$		1200	V
Continuous forward current for $R_{\text{th(j-c,max)}}$	I_{F}		$T_{\text{c}} = 25\text{ °C}$	61	A
			$T_{\text{c}} = 135\text{ °C}$	29	
			$T_{\text{c}} = 153\text{ °C}$	20	
Surge repetitive forward current, sine halfwave ¹⁾	$I_{\text{F,RM}}$	$t_{\text{p}} = 10\text{ ms}$	$T_{\text{c}} = 25\text{ °C}$	80	A
			$T_{\text{c}} = 100\text{ °C}$	60	
Surge non-repetitive forward current, sine halfwave	$I_{\text{F,SM}}$	$t_{\text{p}} = 10\text{ ms}$	$T_{\text{c}} = 25\text{ °C}$	190	A
			$T_{\text{c}} = 150\text{ °C}$	180	
Non-repetitive peak forward current	$I_{\text{F,max}}$	$T_{\text{c}} = 25\text{ °C}, t_{\text{p}} = 10\text{ }\mu\text{s}$		1258	A
I^2t value	$\int I^2t$	$t_{\text{p}} = 10\text{ ms}^{2)}$	$T_{\text{c}} = 25\text{ °C}$	180	A ² s
			$T_{\text{c}} = 150\text{ °C}$	162	
Diode dv/dt ruggedness	dv/dt	$V_{\text{R}} = 0\ldots 960\text{ V}$		150	V/ns
Avalanche energy, single pulse	E_{AS}	$I_{\text{D}} = 20\text{ A}, V_{\text{DD}} = 50\text{ V}, L = 0.5\text{ mH}$		104	mJ
Power dissipation for $R_{\text{th(j-c,max)}}$	P_{tot}		$T_{\text{c}} = 25\text{ °C}$	263	W
			$T_{\text{c}} = 100\text{ °C}$	131	

1) Not subject to production test. The test was performed with 20k pulses (half-wave rectified sine with 10 ms period).

2) sine halfwave

表 3 **特征值**


特征参数	代号	标注或测试条件		数值			单位
				最小值	典型值	最大值	
DC blocking voltage	V_{DC}	$I_R = 500 \mu A, T_{vj} = 25^\circ C$		1200			V
Diode forward voltage	V_F	$I_F = 20 A$	$T_{vj} = 25^\circ C$		1.45	1.8	V
			$T_{vj} = 125^\circ C$		1.69		
			$T_{vj} = 150^\circ C$		1.8		
Reverse current	I_R	$V_R = 1200 V$	$T_{vj} = 25^\circ C$		10	160	μA
			$T_{vj} = 150^\circ C$		58		
Total capacitive charge	Q_C	$V_R = 800 V, T_{vj} = 25^\circ C \text{ \& } 150^\circ C,$ $Q_C = \int_0^{V_R} C(V)dV$			96		nC
Total capacitance	C	$f = 100 \text{ kHz}$	$V_R = 1 V$		1236		pF
			$V_R = 400 V$		87		
			$V_R = 800 V$		70		
Operating junction temperature	T_{vj}			-55		175	$^\circ C$

注: *For optimum lifetime and reliability, Infineon recommends operating conditions that do not exceed 80% of the maximum ratings stated in this datasheet.*
Electrical Characteristic, at $T_{vj} = 25^\circ C$, unless otherwise specified.

3 特征参数图表


Power dissipation as function of case temperature

$P_{\text{tot}} = f(T_c)$
 $T_{vj} \leq 175\text{ }^{\circ}\text{C}$

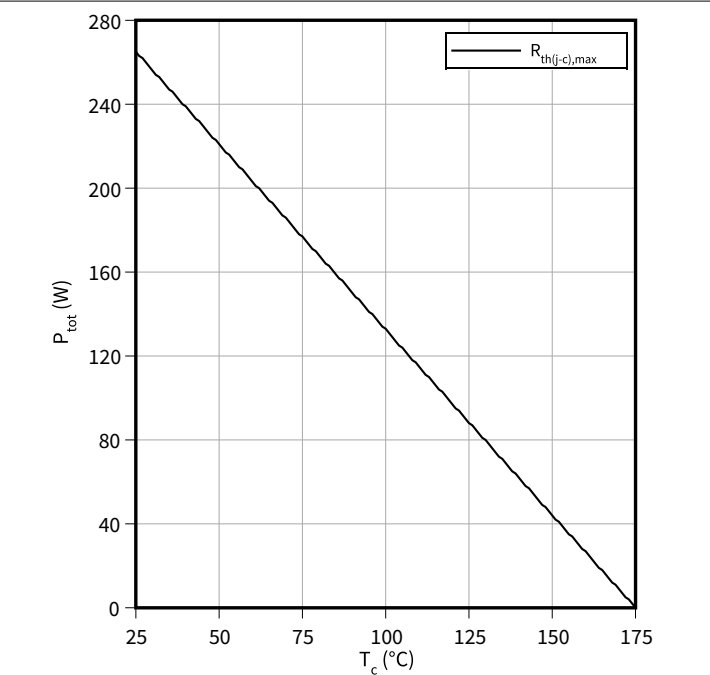


Typical forward characteristics

$I_F = f(V_F)$
 $t_p = 10\text{ }\mu\text{s}$

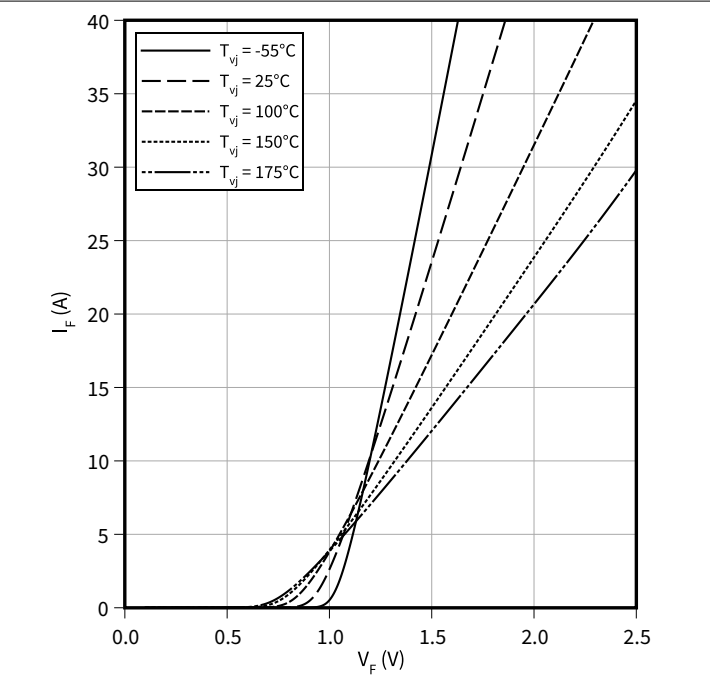


Typical forward characteristics in surge current

$I_F = f(V_F)$
 $t_p = 10\text{ }\mu\text{s}$

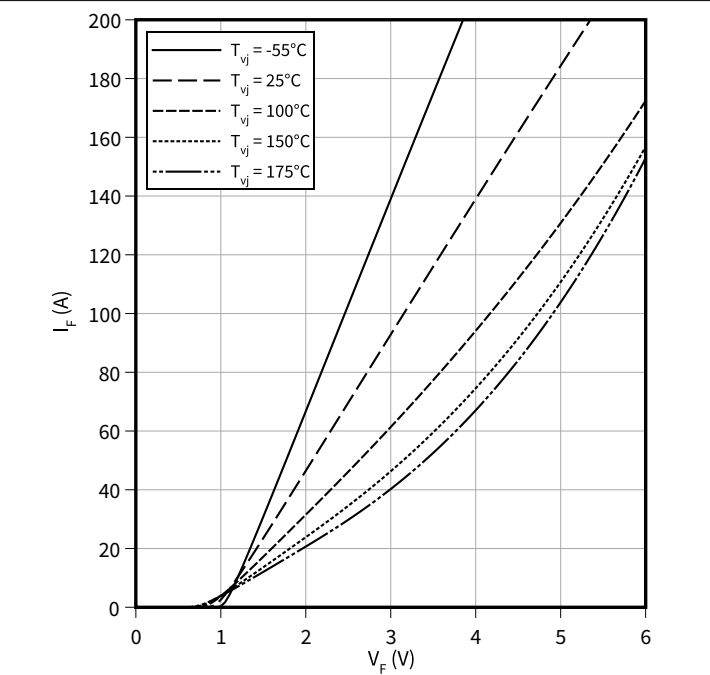

Diode forward current as function of temperature


$I_F = f(T_c)$
 $T_{vj} \leq 175\text{ }^{\circ}\text{C}$

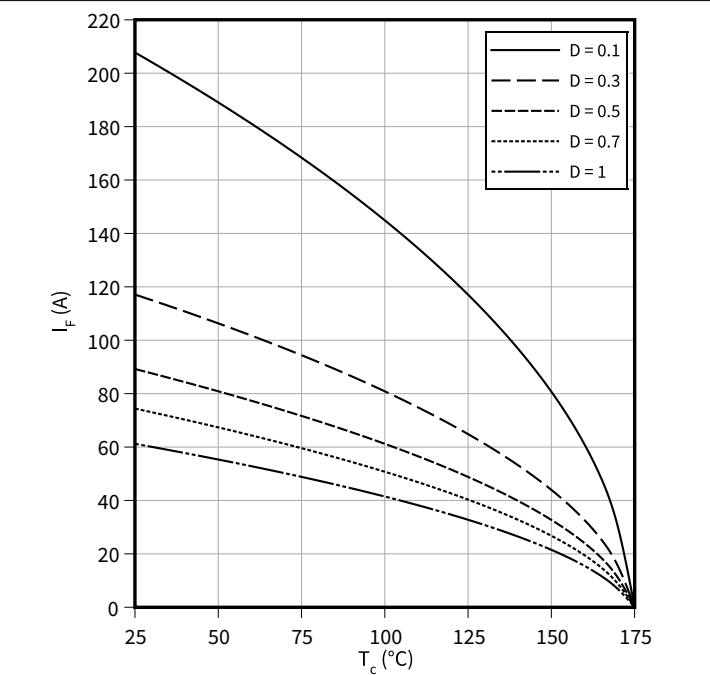

3 特征参数图表


Typical capacitive charge as function of current slope

$Q_C = f(di_F/dt)$
 $T_{vj} = 25\text{ }^{\circ}\text{C}, V_R = 800\text{ V}$

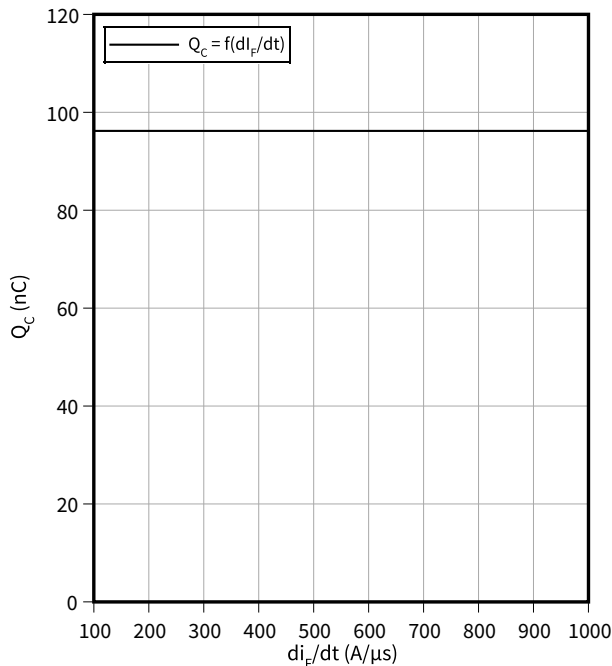


Typical reverse characteristics

$I_R = f(V_R)$

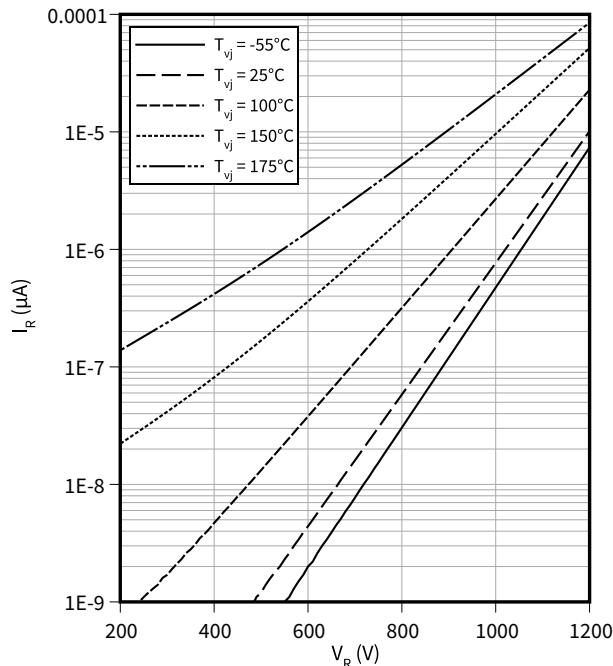


Typical capacitance as function of reverse voltage

$C = f(V_R)$
 $T_{vj} = 25\text{ }^{\circ}\text{C}, f = 100\text{ kHz}$

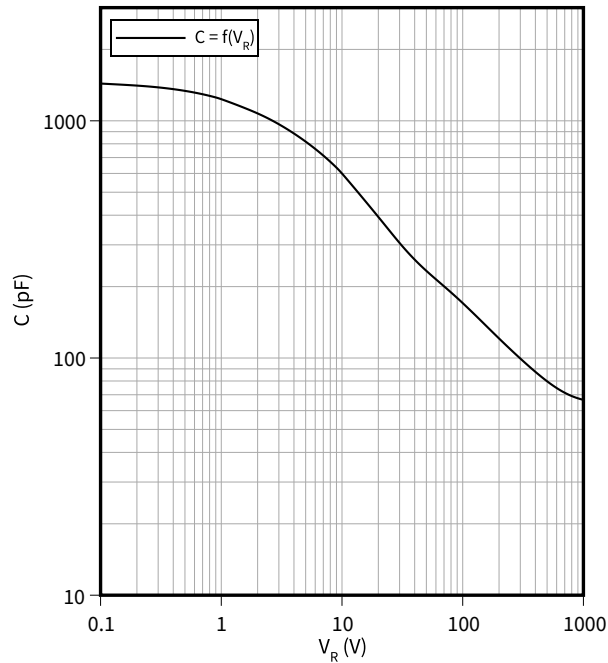

Typical capacitively stored energy as function of reverse voltage


$E_C = f(V_R)$

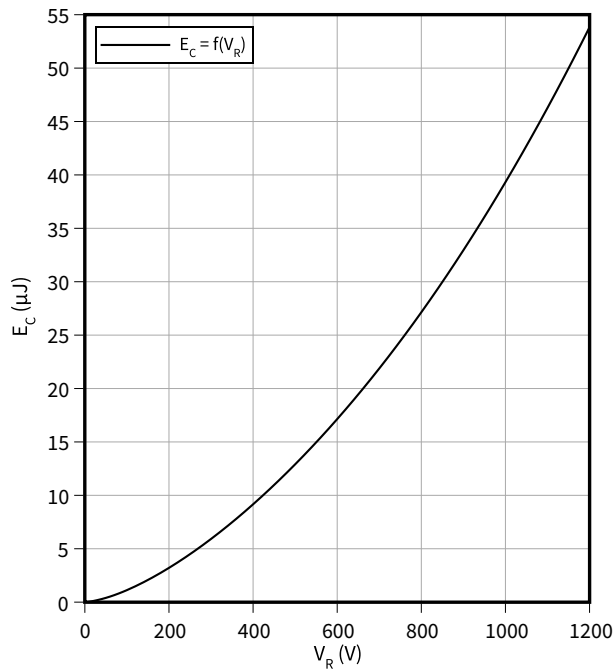


3 特征参数图表

Max. transient thermal impedance

$Z_{th(j-c),max} = f(t_p)$
 $D = t_p/T$

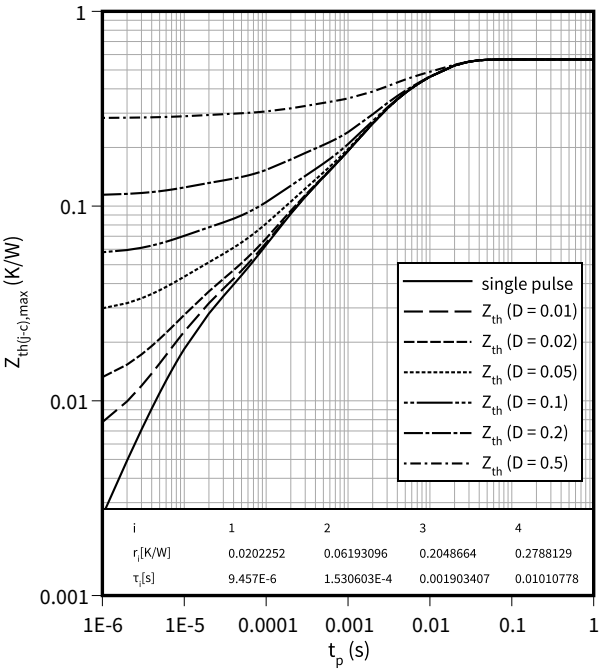

4 封装尺寸

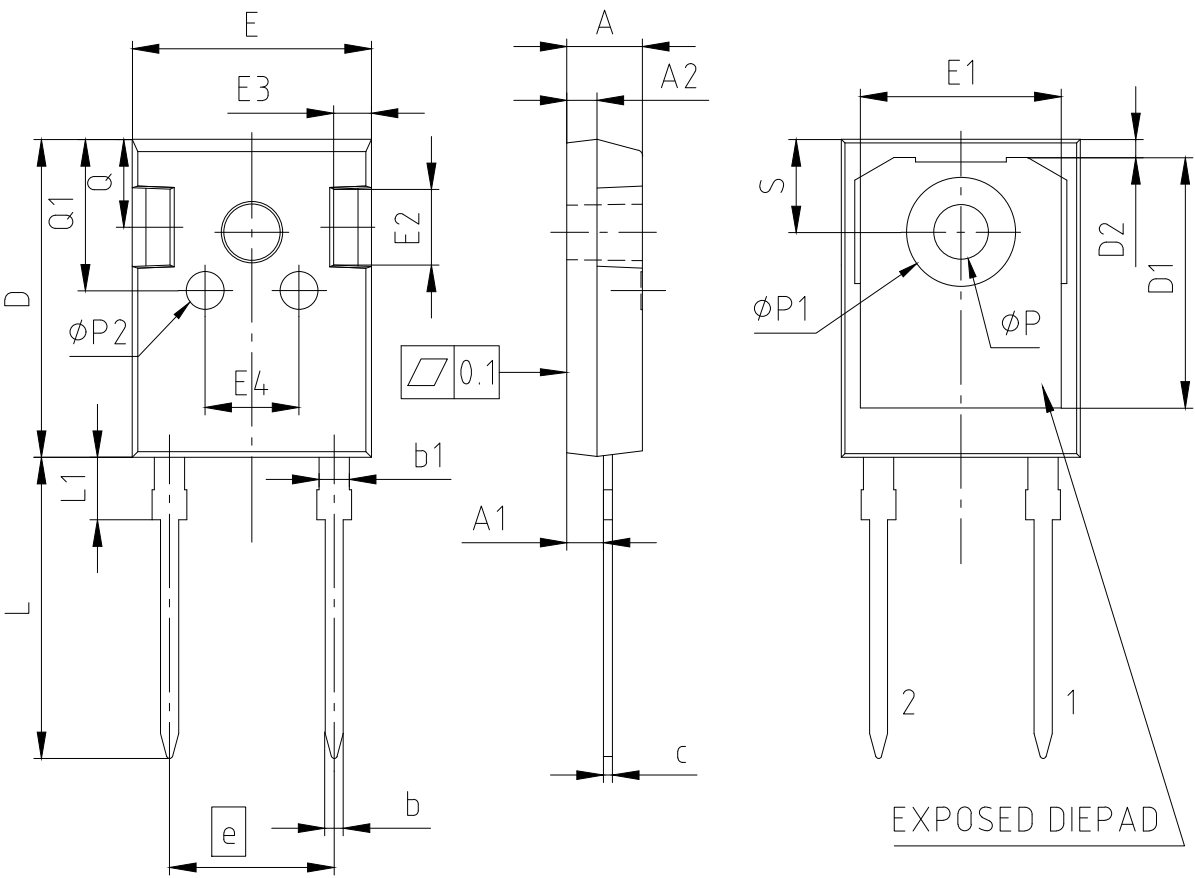

PACKAGE - GROUP NUMBER:		PG-T0247-2-U01			
DIMENSIONS	MILLIMETERS				
	MIN.	MAX.			
A	4.90	5.10	L	19.80	20.10
A1	2.31	2.51	L1	---	4.30
A2	1.90	2.10	ØP	3.50	3.70
b	1.16	1.26	ØP1	7.00	7.40
b1	1.96	2.06	ØP2	2.40	2.60
c	0.59	0.66	Q	5.60	6.00
D	20.90	21.10	Q1	9.80	10.20
D1	16.25	16.85	S	6.05	6.25
D2	1.05	1.35			
E	15.70	15.90			
E1	13.10	13.50			
E2	4.90	5.10			
E3	2.40	2.60			
E4	6.00	6.40			
e	10.88				
N	2				

ALL DIMENSIONS DO NOT INCLUDE
MOLD FLASH OR PROTRUSIONS.

图 1



修订历史

修订历史

修订版本	发布日期	变更说明
0.10	2023-08-02	Target datasheet
0.20	2024-10-16	Preliminary datasheet
1.00	2025-01-08	Final datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2025-01-08

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2025 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any
aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ABH541-003

重要提示

本文档所提供的任何信息绝不应被视为针对任何条件或者品质而做出的保证（质量保证）。

英飞凌对于本文档中所提及的任何事例、提示或者任何特定数值及/或任何关于产品应用方面的信息均在此明确声明其不承担任何保证或者责任，包括但不限于其不侵犯任何第三方知识产权的保证均在此排除。此外，本文档所提供的任何信息均取决于客户履行本文档所载明的义务和客户遵守适用于客户产品以及与客户对于英飞凌产品的应用所相关的任何法律要求、规范和标准。

本文档所含的数据仅供经过专业技术培训的人员使用。客户自身的技术部门有义务对于产品是否适宜于其预期的应用和针对该等应用而言本文档中所提供的信息是否充分自行予以评估。

请注意本产品不符合汽车电子协会制定的车电可靠度验证 AEC Q 100 或 AEC Q101 标准的要求。

警告事项

由于技术所需产品可能含有危险物质。如需了解该等物质的类型，请向离您最近的英飞凌科技办公室接洽。

除非由经英飞凌科技授权代表签署的书面文件中做出另行明确批准的情况外，英飞凌科技的产品不应被用于任何一项一旦产品失效或者产品使用的后当被用于任何一项一旦产品失效或者产品使用的后领域。