

**Description:** CY3250-23533 POD

56 pin QFN OCD with Hirose cable connector (P/N: DF12-5.0-20DP-0.5V-81) with retention mechanism included.

Compatible with:

SF-QFN32A-L-02, QFN foot, 32 pin, 0.5mm pitch, 5mm body

XT-PSoC-15-20H-10-01

Page: 1 of 2

**EA-8C23533-Q32-01 Drawing**

Status: Released

Scale: 3:1

Rev: A

Drawing: J. Glab

Date: 11/27/07

File: EA-8C23533-Q32-01 Dwg


Modified:

**Tolerances:** diameters  $\pm 0.03\text{mm}$  [ $\pm 0.001"$ ],  
PCB perimeters  $\pm 0.13\text{mm}$  [ $\pm 0.005"$ ],  
PCB thicknesses  $\pm 0.18\text{mm}$  [ $\pm 0.007"$ ],  
pitches (from true position)  $\pm 0.08\text{mm}$  [ $\pm 0.003"$ ],  
all other tolerances  $\pm 0.13\text{mm}$  [ $\pm 0.005"$ ]  
unless stated otherwise. Materials and  
specifications are subject to change without notice.


[+] Feedback

Strain Relief Hardware mounting directions

If the target board can be designed to accomodate the strain relief hardware, layout the PCB with the pattern shown on the right. The layout shows the location of non-plated holes through the board relative to the QFN land pattern. If holes can not be added to the target board, the screws can be used as standoffs and sit on the top surface of the target PCB.

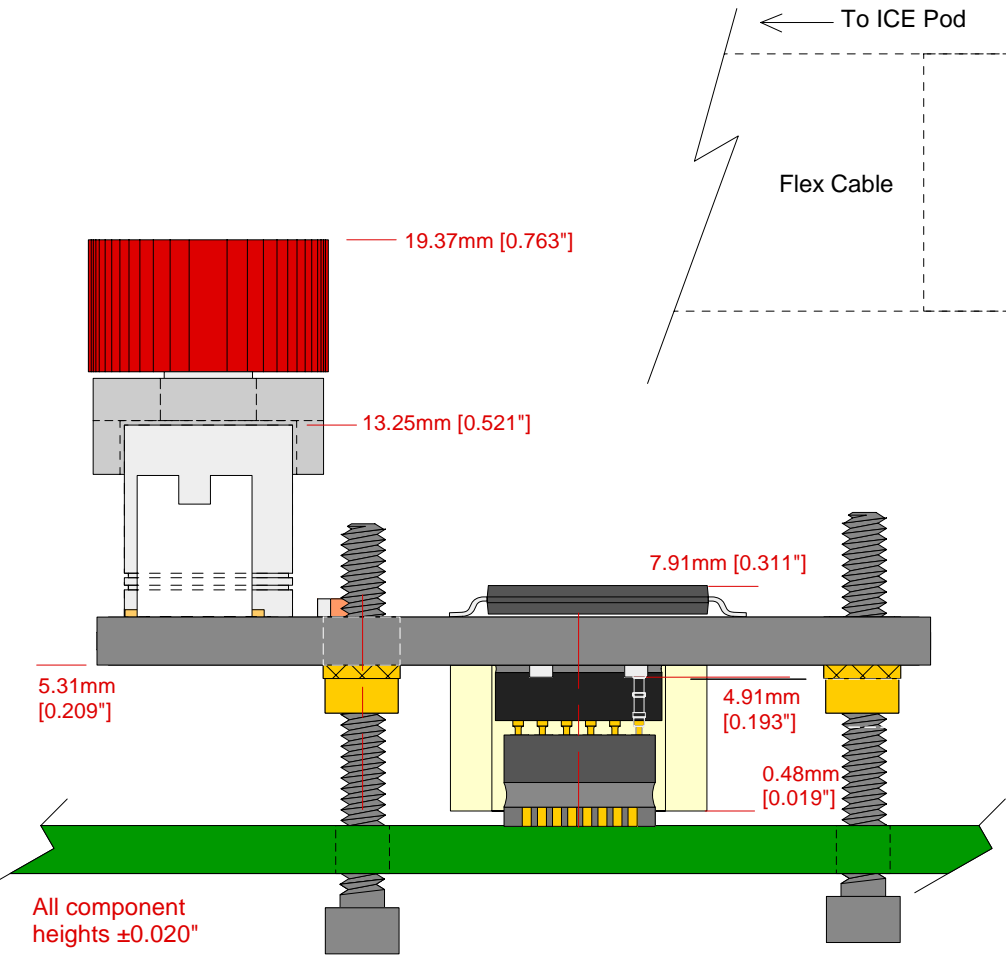


Side view: CY3250-23533QFN Pod on QFN32 foot

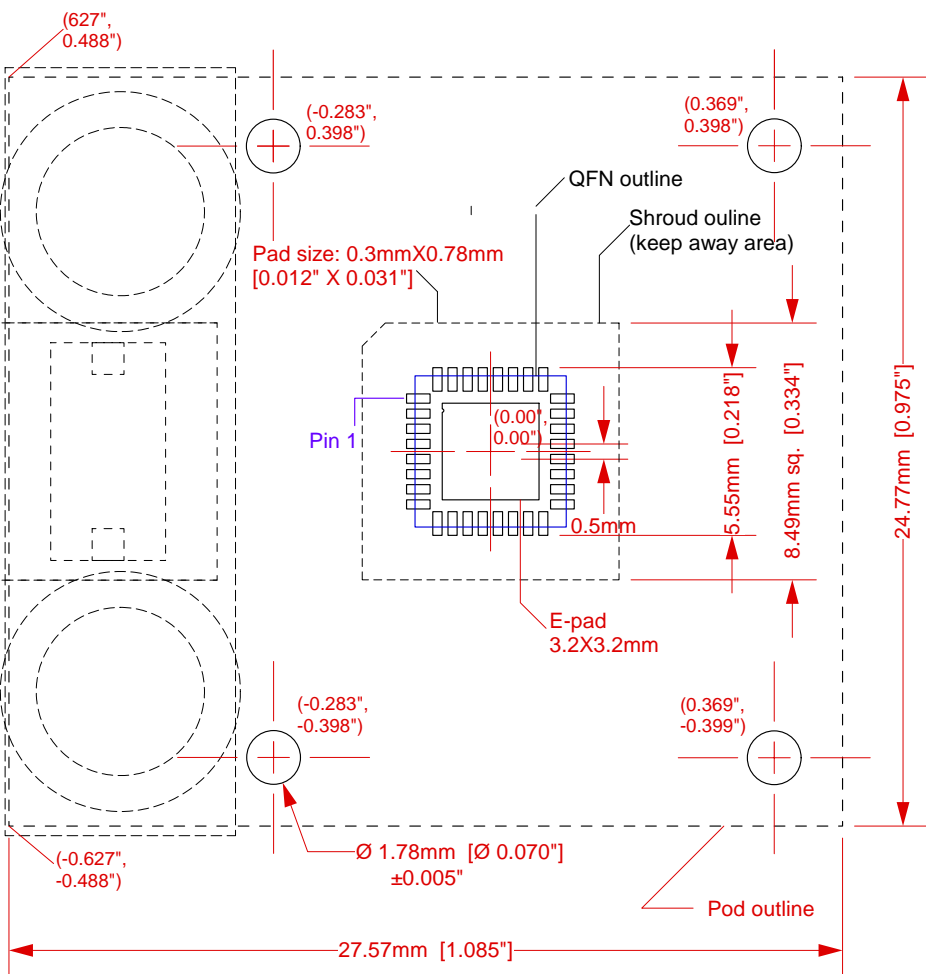

Top View: Target Board component layout

notes:

- 1) Do not place components within the shroud outline unless they have a 0.035" height or less off the target board and are outside the QFN package outline
- 2) All components under the POD outline must have a 0.190" height or less from the top of target board to avoid components on the bottom of the POD board.

EA-8C23533-Q32-01 Drawing		Status: Released	Scale: 4:1	Rev: A
	© 2007 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com	Drawing: J. Glab		Date: 11/27/07
		File: EA-8C23533-Q32-01 Dwg		Modified:

Tolerances: diameters ±0.03mm [±0.001"],  
PCB perimeters ±0.13mm [±0.005"],  
PCB thicknesses ±0.18mm [±0.007"],  
pitches (from true position) ±0.08mm [±0.003"],  
all other tolerances ±0.13mm [±0.005"]  
unless stated otherwise. Materials and  
specifications are subject to change without notice.