

## Thermally-Enhanced High Power RF GaN HEMT 1400 W, 50 V, 960 – 1215 MHz


### Description

The GTVA101K42EV is a 1400-watt GaN high electron mobility transistor (HEMT) for use in multi-standard cellular power amplifier applications. It features input matching, high efficiency, and a thermally-enhanced surface-mount package with bolt-down flange.

**Advance Specification Data Sheets** describe products that are being considered by Infineon for development and market introduction. The target performance shown in Advance Specifications is not final and should not be used for any design activity. Please contact Infineon about the future availability of these products.

### Features

- GaN HEMT technology
- Input matched
- Typical Pulsed CW performance, 960 – 1215 MHz, 50 V, single side, 128  $\mu$ s pulse width, 10% duty cycle
  - Output power at  $P_{3dB} = 1400$  W
  - Efficiency = 68%
  - Gain = 17 dB
- Pb-free and RoHS compliant

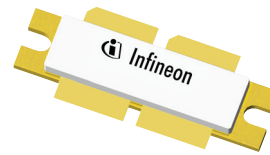

GTVA101K42EV  
Package H-36275-4

### Target RF Characteristics

#### Pulsed CW Specifications (tested in Infineon test fixture)

$V_{DD} = 50$  V,  $I_{DQ} = 200$  mA,  $P_{OUT} (P_{3dB}) = 1400$  W peak,  $f = 960$  to 1215 MHz, pulse width = 128  $\mu$ s, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Linear Gain	$G_{ps}$	—	17	—	dB
Drain Efficiency	$\eta_D$	—	68	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = -8\text{ V}$ , $I_D = 100\text{ mA}$	$V_{(BR)DSS}$	150	—	—	V
Drain-Source Leakage Current	$V_{GS} = -8\text{ V}$ , $V_{DS} = 10\text{ V}$	$I_{DSS}$	—	—	5	mA
Gate Threshold Voltage	$V_{DS} = 10\text{ V}$ , $I_D = 200\text{ mA}$	$V_{GS(th)}$	-3.8	-3.0	-2.7	V
Gate Quiescent Voltage	$V_{DS} = 50\text{ V}$ , $I_D = 200\text{ mA}$	$V_{GS(Q)}$	—	-3.1	—	V

## Maximum Ratings


Parameter	Symbol	Value	Unit
Drain-source Voltage	$V_{DSS}$	125	V
Gate-source Voltage	$V_{GS}$	-10 to +2	V
Operating Voltage	$V_{DD}$	0 to +50	V
Gate Current	$I_G$	TBD	mA
Drain Current	$I_D$	TBD	A
Junction Temperature	$T_J$	225	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C

## Ordering Information

Type and Version	Order Code	Package Description	Shipping
GTVA101K42EV V1 R0	TBD	H-36275-4, bolt-down	Tape & Reel, 50 pcs
GTVA101K42EV V1 R2	TBD	H-36275-4, bolt-down	Tape & Reel, 250 pcs

## Evaluation Boards

Order Code	Frequency	Description
LTN/GTVA101K42EV E1	960 – 1215 MHz	Class AB, combined outputs, RO4350B, 0.508mm thick
LTN/GTVA101K42EV E2	1030 MHz	Class AB, combined outputs, RO4350B, 0.508mm thick

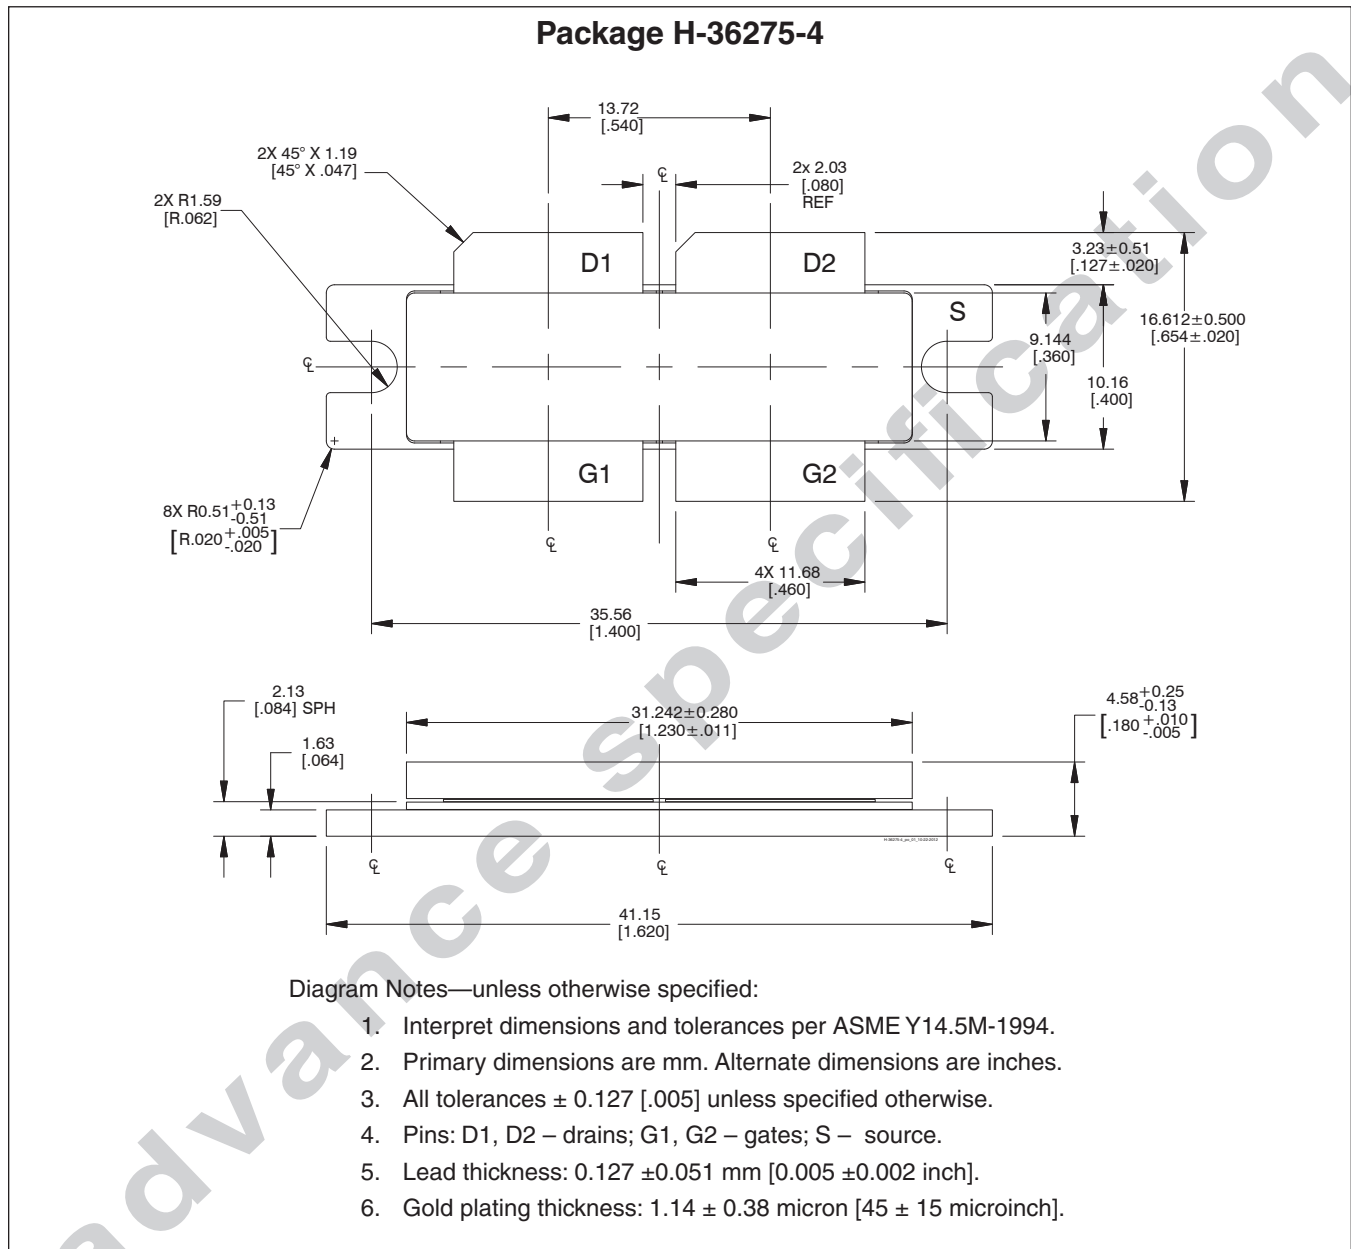**Package Outline Specifications**


Find the latest and most complete information about products and packaging at the Infineon Internet page  
<http://www.infineon.com/rfpower>

## Revision History


Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2016-10-13	Advance	All	Data Sheet reflects advance specification for product development
01.1	2017-07-31	Advance	2	Added evaluation boards information

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:  
 +1 877 465 3667 (1-877-GO-LDMOS) USA  
 or +1 408 776 0600 International



**Edition 2017-07-31**

**Published by**  
**Infineon Technologies AG**  
**85579 Neubiberg, Germany**

**© 2016 Infineon Technologies AG**  
**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.