

# IRHYS9A7234CM, IRHYB9A7234CM

PD-97886B

## Radiation Hardened Power MOSFET 250V, 17A, N-channel, R9 Superjunction Technology

### Features

- Low  $R_{DS(on)}$
- Fast switching
- Single event effect (SEE) hardened
- Low total gate charge
- Simple drive requirements
- Hermetically sealed
- Electrically isolated case
- Ceramic eyelets (Low-Ohmic TO-257AA)
- ESD rating: class 2 per MIL-STD-750, Method 1020

### Applications

- DC-DC converter
- Motor drives
- Electric propulsion

### Product Validation

Qualified according to MIL-PRF-19500 for space applications

### Description

IR HiRel R9 technology provides superior power MOSFETs for space applications. These devices have improved immunity to Single Event Effect (SEE) and have been characterized for useful performance with Linear Energy Transfer (LET) up to 88.6 MeV·cm<sup>2</sup>/mg. Their combination of low  $R_{DS(on)}$  and faster switching times reduces the power losses and increases power density in today's high speed switching applications such as DC-DC converters and motor controllers. These devices retain all of the well-established advantages of MOSFETs such as voltage control, fast switching and temperature stability of electrical parameters.

### Ordering Information

**Table 1** Ordering options

Part number	Package	Screening Level	TID Level
IRHYS9A7234CM	Low-Ohmic TO-257AA	COTS	100 krad(Si)
JANSR2N7649T3	Low-Ohmic TO-257AA	JANS	100 krad(Si)
IRHYS9A3234CM	Low-Ohmic TO-257AA	COTS	300 krad(Si)
JANSF2N7649T3	Low-Ohmic TO-257AA	JANS	300 krad(Si)
IRHYB9A7234CM	Tabless TO-257AA	COTS	100 krad(Si)
JANSR2N7649D5	Tabless TO-257AA	JANS	100 krad(Si)
IRHYB9A3234CM	Tabless TO-257AA	COTS	300 krad(Si)
JANSF2N7649D5	Tabless TO-257AA	JANS	300 krad(Si)

### Product Summary

- $BV_{DSS}$ : 250V
- $I_D$ : 17A
- $R_{DS(on), max}$ : 110mΩ
- $Q_{G, max}$ : 34nC
- REF: MIL-PRF-19500/775



**Table of contents**

**Table of contents**

<b>Features .....</b>	<b>1</b>
<b>Potential Applications.....</b>	<b>1</b>
<b>Product Validation.....</b>	<b>1</b>
<b>Ordering Information.....</b>	<b>1</b>
<b>Table of contents.....</b>	<b>2</b>
<b>1 Absolute Maximum Ratings .....</b>	<b>3</b>
<b>2 Device Characteristics .....</b>	<b>4</b>
2.1 Electrical Characteristics (Pre-Irradiation).....	4
2.2 Source-Drain Diode Ratings and Characteristics (Pre-Irradiation) .....	5
2.3 Thermal Characteristics .....	5
2.4 Radiation Characteristics.....	5
2.4.1 Electrical Characteristics - Post Total Dose Irradiation .....	5
2.4.2 Single Event Effects – Safe Operating Area .....	6
<b>3 Electrical Characteristics Curves (Pre-irradiation) .....</b>	<b>7</b>
<b>4 Test Circuits (Pre-irradiation) .....</b>	<b>11</b>
<b>5 Package Outline (Low-Ohmic TO-257AA).....</b>	<b>12</b>
<b>6 Package Outline (Tabless TO-257AA) .....</b>	<b>13</b>
<b>Revision history.....</b>	<b>14</b>

**Absolute Maximum Ratings**

**1 Absolute Maximum Ratings**

**Table 2 Absolute Maximum Ratings (Pre-Irradiation)**

Symbol	Parameter	Value	Unit
$I_{D1} @ V_{GS} = 12V, T_C = 25^\circ C$	Continuous Drain Current	17	A
$I_{D2} @ V_{GS} = 12V, T_C = 100^\circ C$	Continuous Drain Current	10.5	A
$I_{DM} @ T_C = 25^\circ C$	Pulsed Drain Current <sup>1</sup>	68	A
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	75	W
	Linear Derating Factor	0.6	W/°C
$V_{GS}$	Gate-to-Source Voltage	± 20	V
$E_{AS}$	Single Pulse Avalanche Energy <sup>2</sup>	331	mJ
$I_{AR}$	Avalanche Current <sup>1</sup>	17	A
$E_{AR}$	Repetitive Avalanche Energy <sup>1</sup>	17	mJ
dv/dt	Peak Diode Reverse Recovery <sup>3</sup>	13	V/ns
$T_J$ $T_{STG}$	Operating Junction and Storage Temperature Range	-55 to +150	°C
	Lead Temperature	300 (0.063in./1.6mm from case for 10s)	
	Weight	4.3 (Typical)	g

<sup>1</sup> Repetitive Rating; Pulse width limited by maximum junction temperature.

<sup>2</sup>  $V_{DD} = 150V$ , starting  $T_J = 25^\circ C$ ,  $L = 6.0mH$ , Peak  $I_L = 10.5A$ ,  $V_{GS} = 20V$

<sup>3</sup>  $I_{SD} \leq 17A$ ,  $di/dt \leq 1100A/\mu s$ ,  $V_{DD} \leq 250V$ ,  $T_J \leq 150^\circ C$

## Device Characteristics

## 2 Device Characteristics

### 2.1 Electrical Characteristics (Pre-Irradiation)

**Table 3 Static and Dynamic Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (Unless Otherwise Specified)**

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	250	—	—	V	$V_{GS} = 0V, I_D = 1.0\text{mA}$
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.25	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $I_D = 1.0\text{mA}$
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance	—	—	110	m $\Omega$	$V_{GS} = 12V, I_{D2} = 10.5A^1$
$V_{GS(th)}$	Gate Threshold Voltage	2.0	—	4.0	V	$V_{DS} \geq V_{GS}, I_D = 1\text{mA}$
$\Delta V_{GS(th)}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-9.5	—	mV/ $^\circ\text{C}$	
Gfs	Forward Transconductance	10	—	—	S	$V_{DS} = 15V, I_{D2} = 10.5A^1$
$I_{DSS}$	Zero Gate Voltage Drain Current	—	—	1.0	$\mu\text{A}$	$V_{DS} = 200V, V_{GS} = 0V$
		—	—	10		$V_{DS} = 200V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
$I_{GSS}$	Gate-to-Source Leakage Forward	—	—	100	nA	$V_{GS} = 20V$
	Gate-to-Source Leakage Reverse	—	—	-100		$V_{GS} = -20V$
$Q_G$	Total Gate Charge	—	—	34	nC	$I_{D1} = 17A$ $V_{DS} = 125V$ $V_{GS} = 12V$
$Q_{GS}$	Gate-to-Source Charge	—	—	13		
$Q_{GD}$	Gate-to-Drain ('Miller') Charge	—	—	13		
$t_{d(on)}$	Turn-On Delay Time	—	—	25	ns	$I_{D1} = 17A^{**}$ $V_{DD} = 125V$ $R_G = 7.5\Omega$ $V_{GS} = 12V$
$t_r$	Rise Time	—	—	25		
$t_{d(off)}$	Turn-Off Delay Time	—	—	50		
$t_f$	Fall Time	—	—	25		
$L_s + L_D$	Total Inductance	—	6.8	—	nH	Measured from Drain lead (6mm /0.25in. from package) to Source lead (6mm /0.25in. from package) with Source wires internally bonded from Source Pin to Drain Pad
$C_{iss}$	Input Capacitance	—	1510	—	pF	$V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1.0\text{MHz}$
$C_{oss}$	Output Capacitance	—	240	—		
$C_{rss}$	Reverse Transfer Capacitance	—	1.0	—		
$R_G$	Gate Resistance	—	1.0	—	$\Omega$	$f = 1.0\text{MHz}$ , open drain

\*\* Switching speed maximum limits are based on manufacturing test equipment and capability.

<sup>1</sup> Pulse width  $\leq 300 \mu\text{s}$ ; Duty Cycle  $\leq 2\%$

**IRHYS9A7234CM, IRHYB9A7234CM**
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**
**Device Characteristics**
**2.2 Source-Drain Diode Ratings and Characteristics (Pre-Irradiation)**
**Table 4 Source-Drain Diode Characteristics**

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	17	A	
$I_{SM}$	Pulsed Source Current (Body Diode) <sup>1</sup>	—	—	68	A	
$V_{SD}$	Diode Forward Voltage	—	—	1.2	V	$T_J = 25^\circ\text{C}$ , $I_S = 17\text{A}$ , $V_{GS} = 0\text{V}$ <sup>2</sup>
$t_{rr}$	Reverse Recovery Time	—	—	335	ns	$T_J = 25^\circ\text{C}$ , $I_F = 17\text{A}$ , $V_{DD} \leq 50\text{V}$
$Q_{rr}$	Reverse Recovery Charge	—	—	3.6	$\mu\text{C}$	$di/dt = 100\text{A}/\mu\text{s}$ <sup>2</sup>
$t_{on}$	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ )				

**2.3 Thermal Characteristics**
**Table 5 Thermal Resistance**

Symbol	Parameter	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction-to-Case	—	—	1.67	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient	—	—	80	

**2.4 Radiation Characteristics**

IR HiRel radiation hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at IR HiRel is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 3 and 4) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

**2.4.1 Electrical Characteristics - Post Total Dose Irradiation**
**Table 6 Electrical Characteristics @  $T_J = 25^\circ\text{C}$ , Post Total Dose Irradiation<sup>3, 4</sup>**

Symbol	Parameter	Up to 300krads (Si) <sup>5</sup>		Unit	Test Conditions
		Min.	Max.		
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	250	—	V	$V_{GS} = 0\text{V}$ , $I_D = 1\text{mA}$
$V_{GS(th)}$	Gate Threshold Voltage	2.0	4.0	V	$V_{DS} \geq V_{GS}$ , $I_D = 1\text{mA}$
$I_{GSS}$	Gate-to-Source Leakage Forward	—	100	nA	$V_{GS} = 20\text{V}$
	Gate-to-Source Leakage Reverse	—	-100		$V_{GS} = -20\text{V}$
$I_{DSS}$	Zero Gate Voltage Drain Current	—	1.0	$\mu\text{A}$	$V_{DS} = 200\text{V}$ , $V_{GS} = 0\text{V}$
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance (TO-3) <sup>2</sup>	—	110	$\text{m}\Omega$	$V_{GS} = 12\text{V}$ , $I_{D2} = 10.5\text{A}$
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance (Low-Ohmic TO-257AA) <sup>2</sup>	—	110	$\text{m}\Omega$	$V_{GS} = 12\text{V}$ , $I_{D2} = 10.5\text{A}$
$V_{SD}$	Diode Forward Voltage	—	1.2	V	$V_{GS} = 0\text{V}$ , $I_F = 17\text{A}$

<sup>1</sup> Repetitive Rating; Pulse width limited by maximum junction temperature.

<sup>2</sup> Pulse width  $\leq 300 \mu\text{s}$ ; Duty Cycle  $\leq 2\%$ 
<sup>3</sup> Total Dose Irradiation with  $V_{GS}$  Bias.  $V_{GS} = 12\text{V}$  applied and  $V_{DS} = 0$  during irradiation per MIL-STD-750, Method 1019, condition A.

<sup>4</sup> Total Dose Irradiation with  $V_{DS}$  Bias.  $V_{DS} = 200\text{V}$  applied and  $V_{GS} = 0$  during irradiation per MIL-STD-750, Method 1019, condition A.


<sup>5</sup> Part numbers IRHYS9A7234CM (JANSR2N7649T3), IRHYS9A3234CM (JANSF2N7649T3), IRHYB9A7234CM (JANSR2N7649D5), and IRHYB9A3234CM (JANSF2N7649D5)

### 2.4.2 Single Event Effects – Safe Operating Area

IR HiRel radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. 1 and Table 7.

**Table 7 Typical Single Event Effects Safe Operating Area**

LET (MeV·cm <sup>2</sup> /mg)	Energy (MeV)	Range (μm)	V <sub>DS</sub> (V)			
			V <sub>GS</sub> = 0V	V <sub>GS</sub> = -1V	V <sub>GS</sub> = -5V	V <sub>GS</sub> = -10V
35.7 ± 5%	486 ± 5%	59 ± 10%	250	250	250	250
58.5 ± 5%	865 ± 5%	69 ± 7.5%	250	250	250	250
88.6 ± 5%	1685 ± 5%	90 ± 5%	250	250	—	—

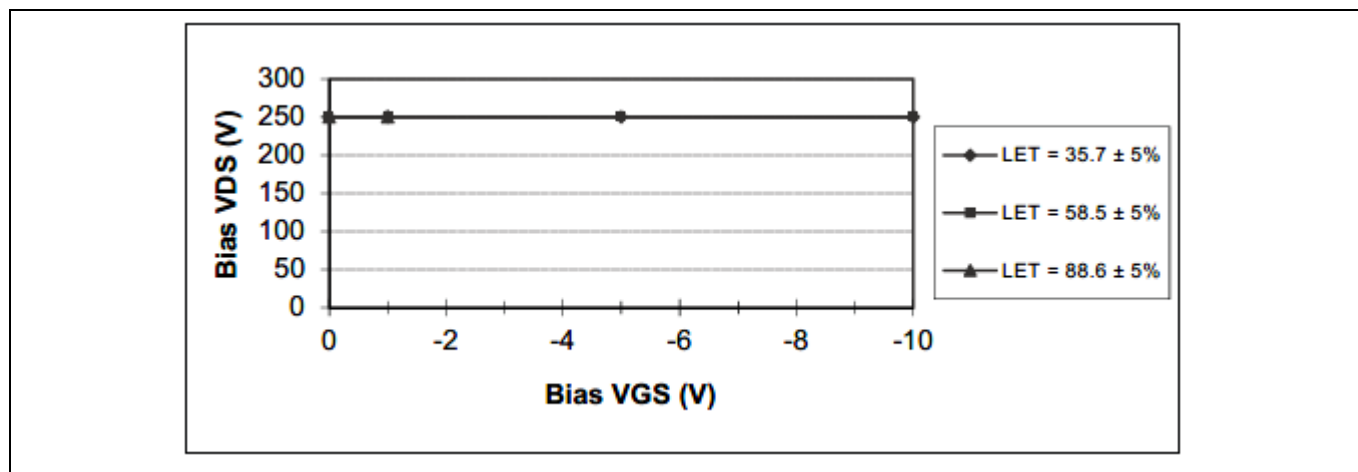


**Figure 1 Typical Single Event Effect, Safe Operating Area**


**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**

**Electrical Characteristics Curves (Pre-irradiation)**


**3 Electrical Characteristics Curves (Pre-irradiation)**

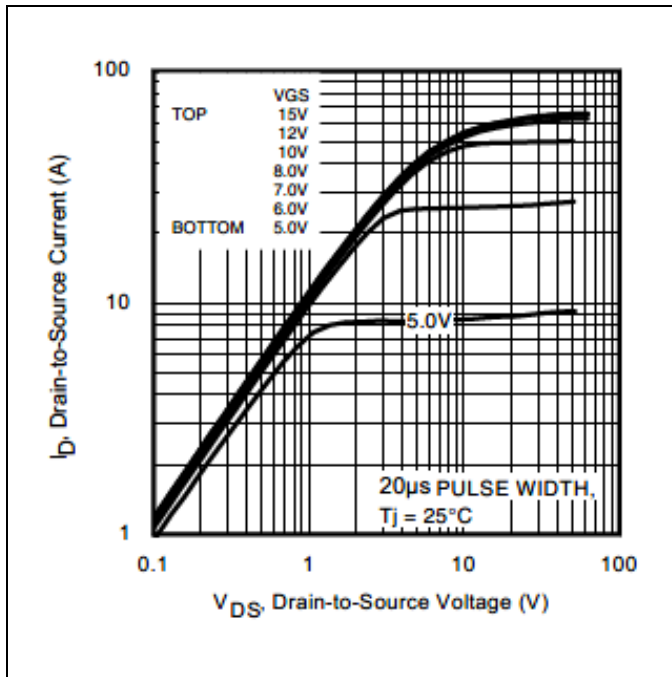


**Figure 2 Typical Output Characteristics**

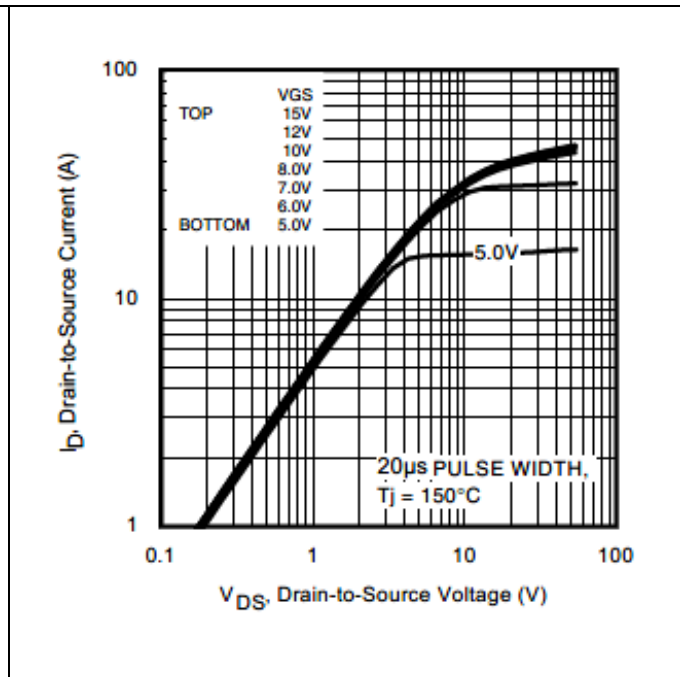

**Figure 3 Typical Output Characteristics**

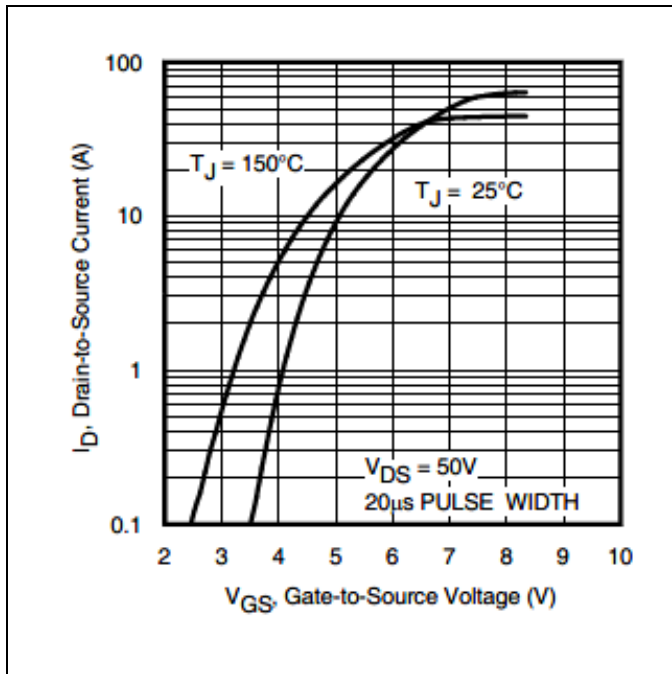


**Figure 4 Typical Transfer Characteristics**

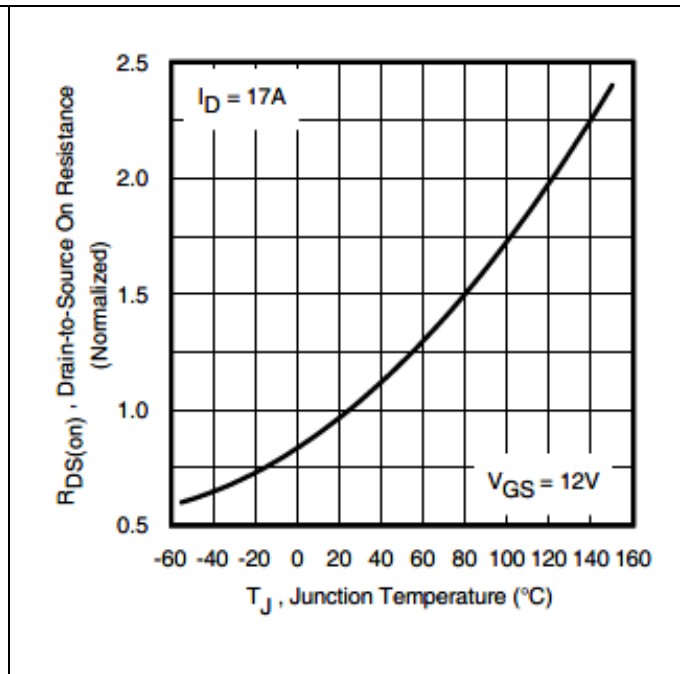


**Figure 5 Normalized On-Resistance Vs. Temperature**


**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**  
**Electrical Characteristics Curves (Pre-irradiation)**

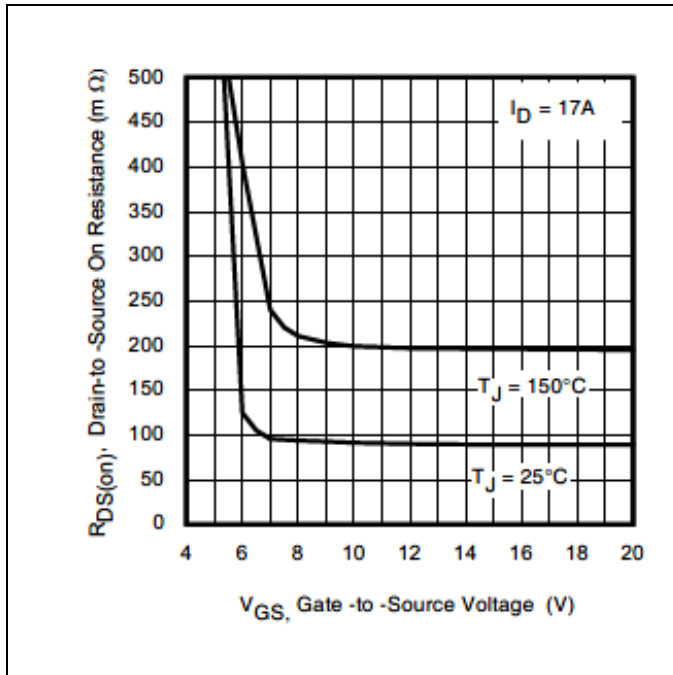


**Figure 6 Typical On-Resistance Vs. Gate Voltage**

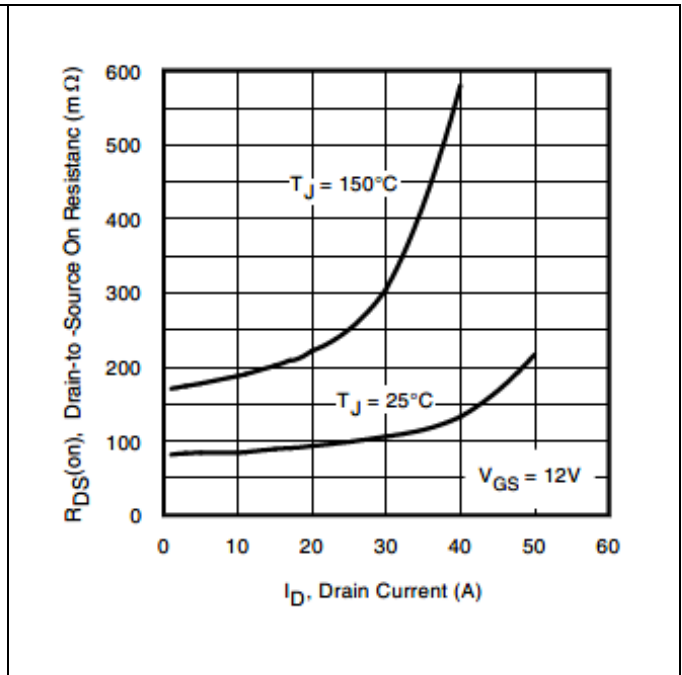

**Figure 7 Typical On-Resistance Vs. Drain Current**

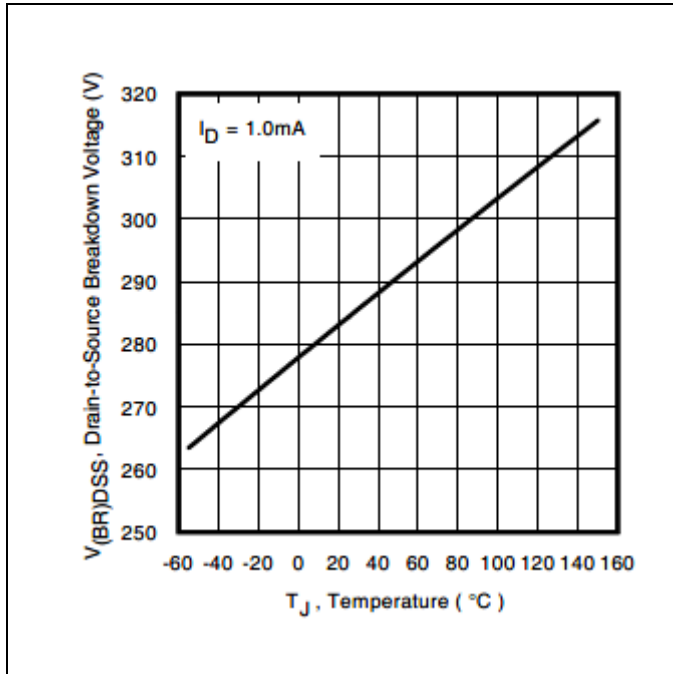


**Figure 8 Typical Drain-to-Source Breakdown Voltage Vs. Temperature**

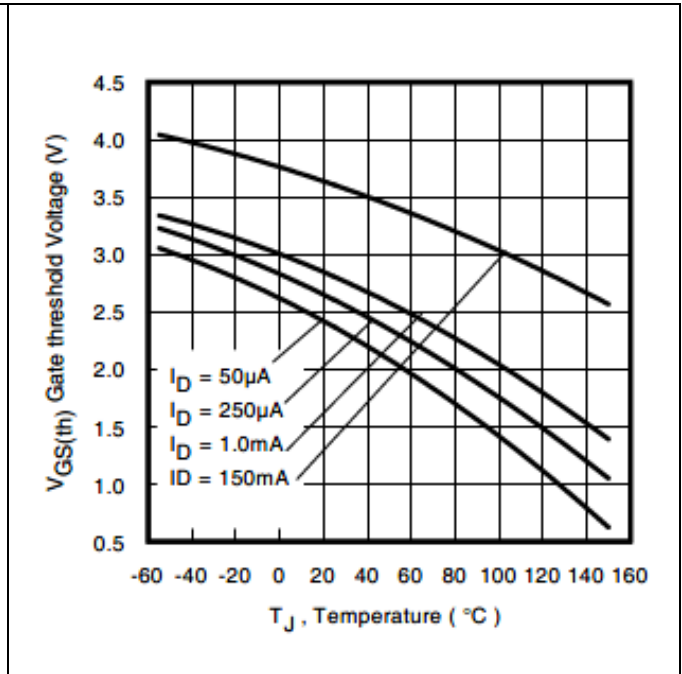


**Figure 9 Typical Threshold Voltage Vs. Temperature**




**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**  
**Electrical Characteristics Curves (Pre-irradiation)**

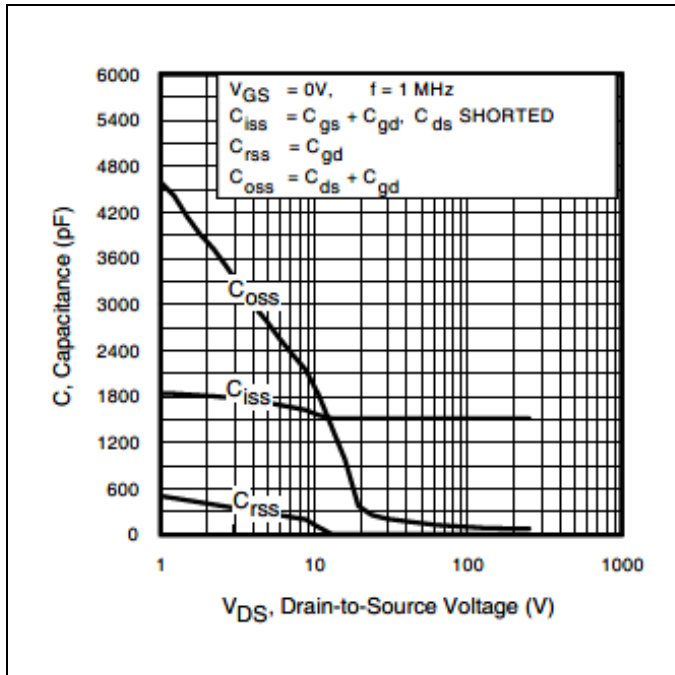


**Figure 10 Typical Capacitance Vs. Drain-to-Source Voltage**

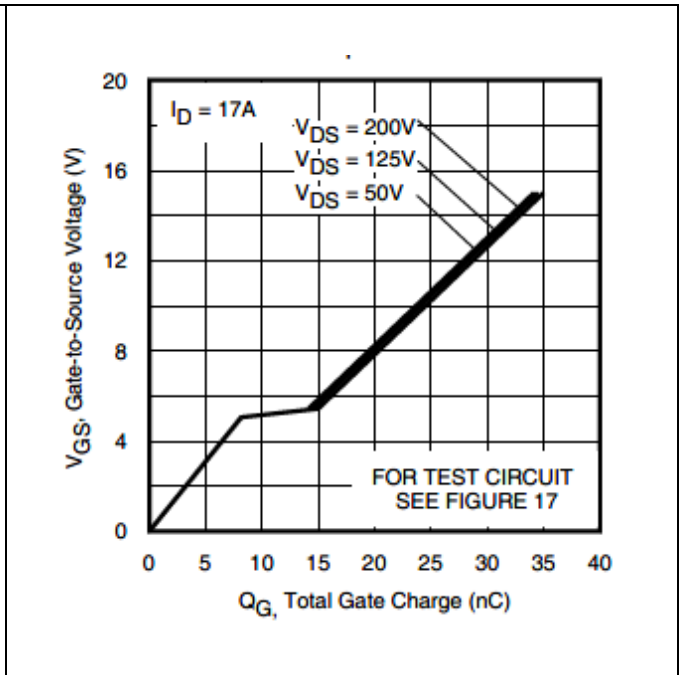

**Figure 11 Typical Gate Charge Vs. Gate-to-Source Voltage**

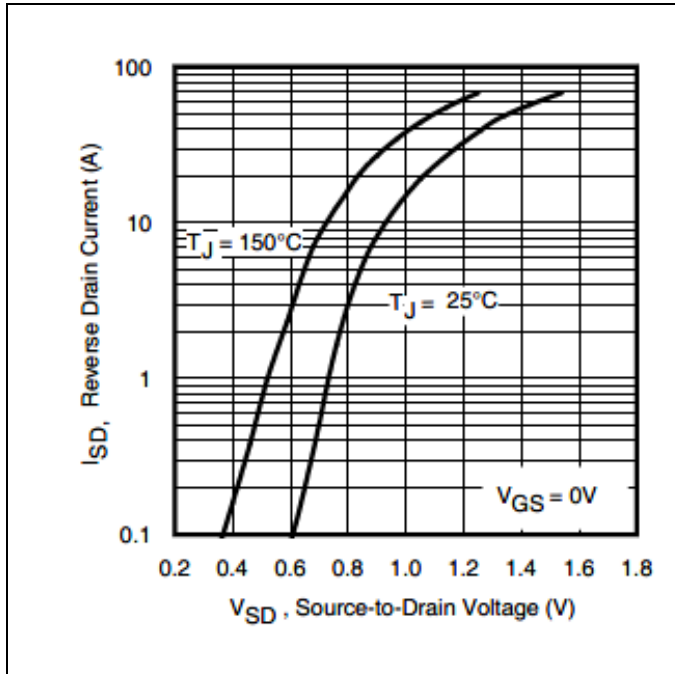


**Figure 12 Typical Source-Drain Vs. Diode Forward Voltage**

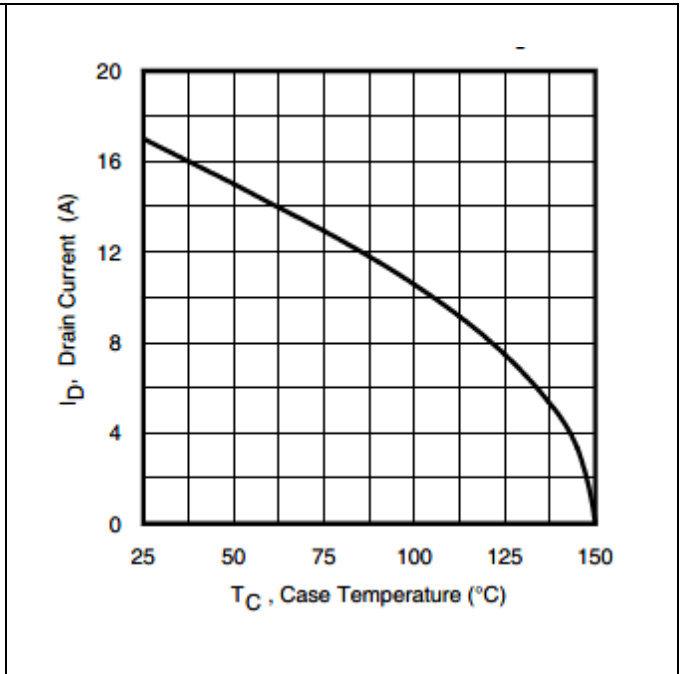


**Figure 13 Maximum Drain Current Vs. Case Temperature**

**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**


**Electrical Characteristics Curves (Pre-irradiation)**

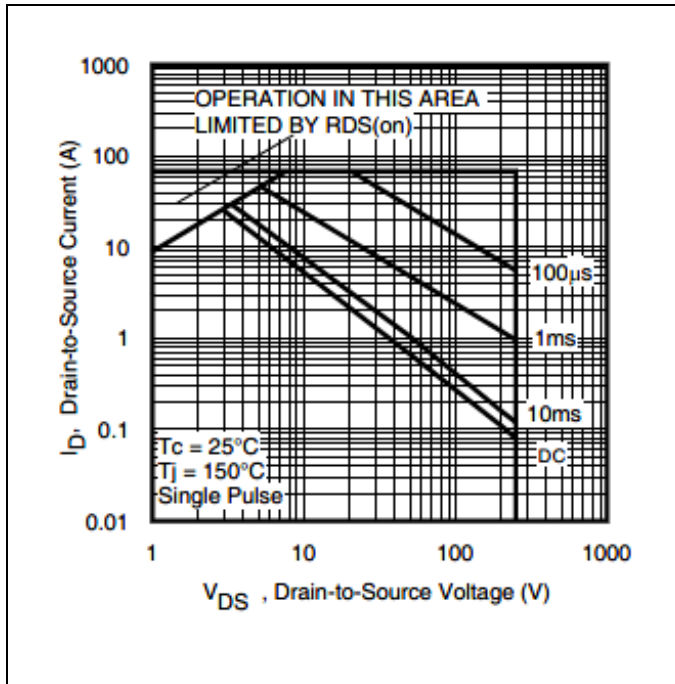

**Figure 14 Maximum Safe Operating Area**

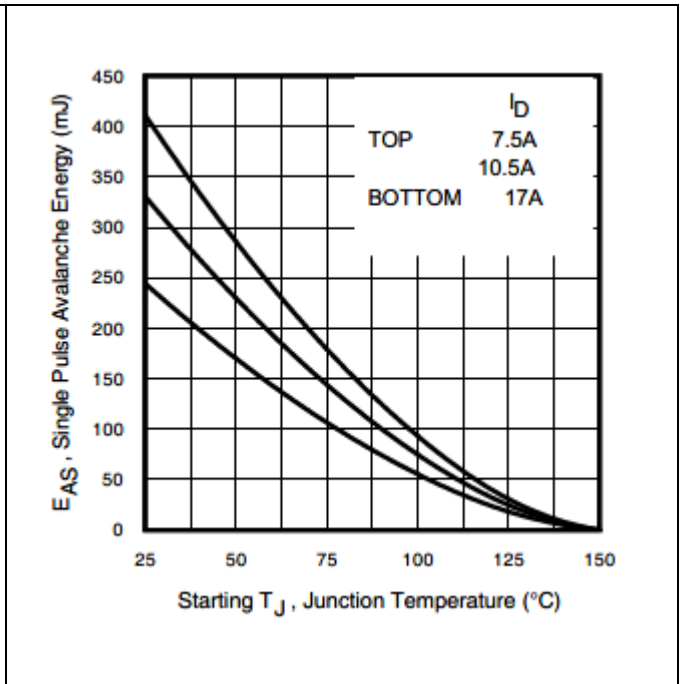

**Figure 15 Maximum Effective Transient Thermal Impedance, Junction-to-Case**

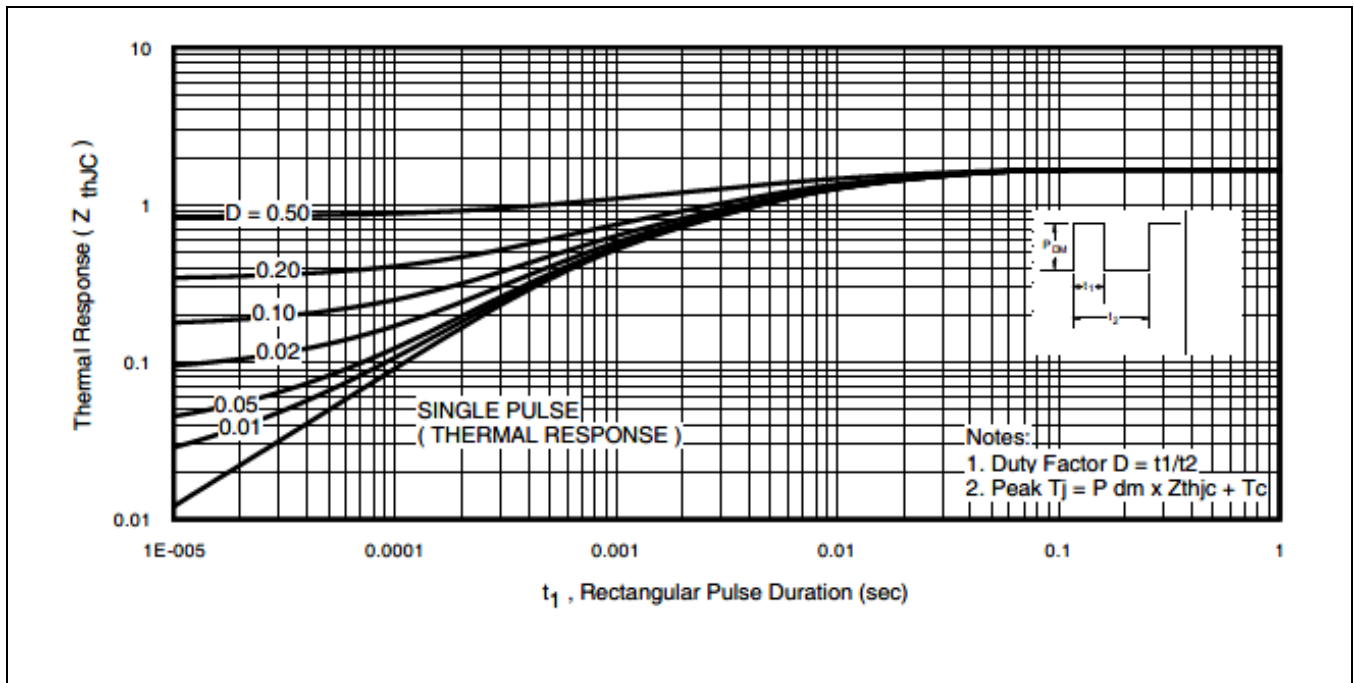

**Figure 16 Maximum Effective Transient Thermal Impedance, Junction-to-Case**

## 4 Test Circuits (Pre-irradiation)

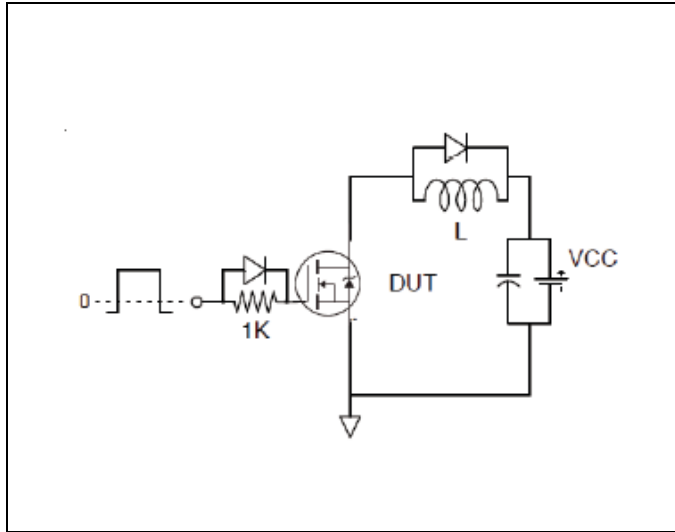


Figure 17 Gate Charge Test Circuit

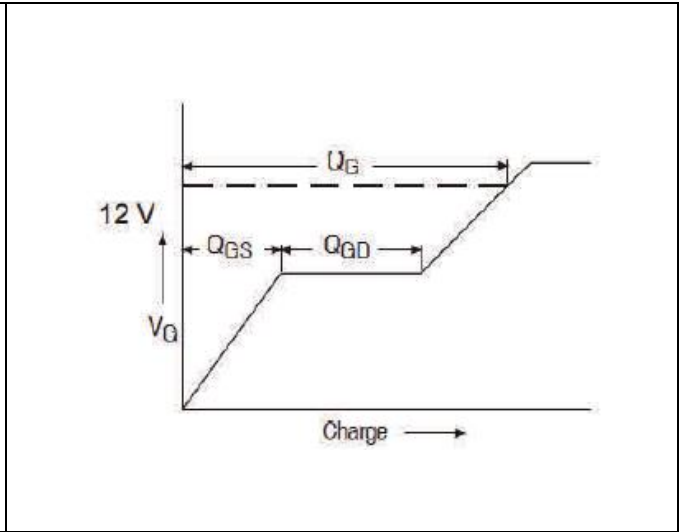


Figure 18 Gate Charge Waveform

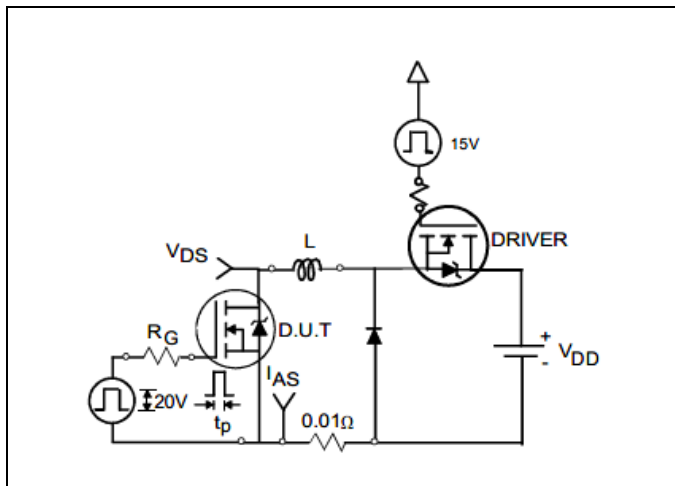


Figure 19 Unclamped Inductive Test Circuit

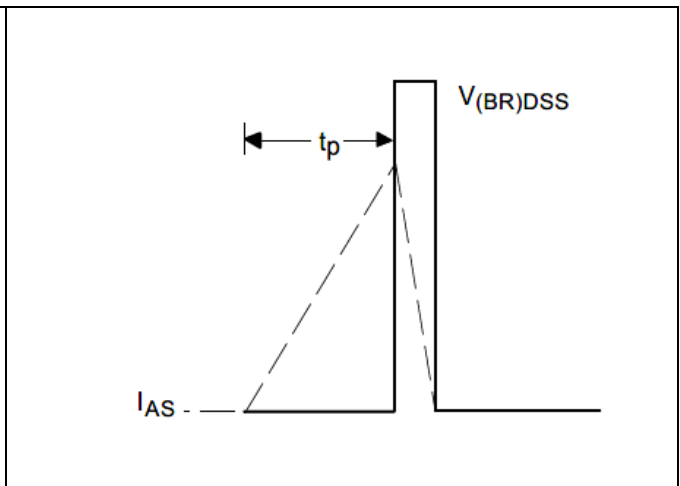


Figure 20 Unclamped Inductive Waveform

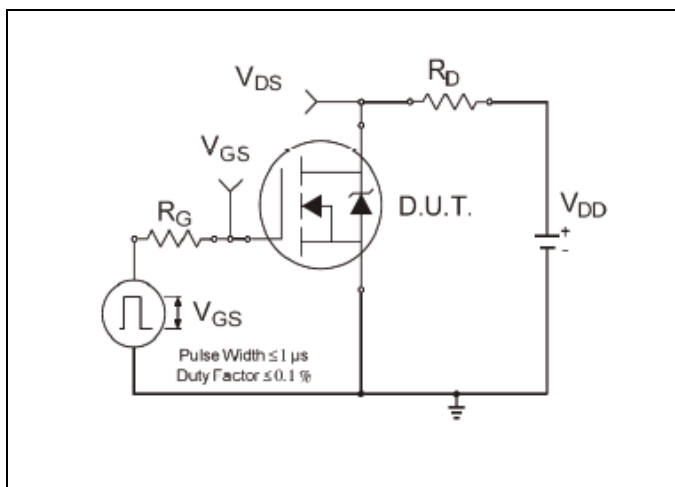


Figure 21 Switching Time Test Circuit


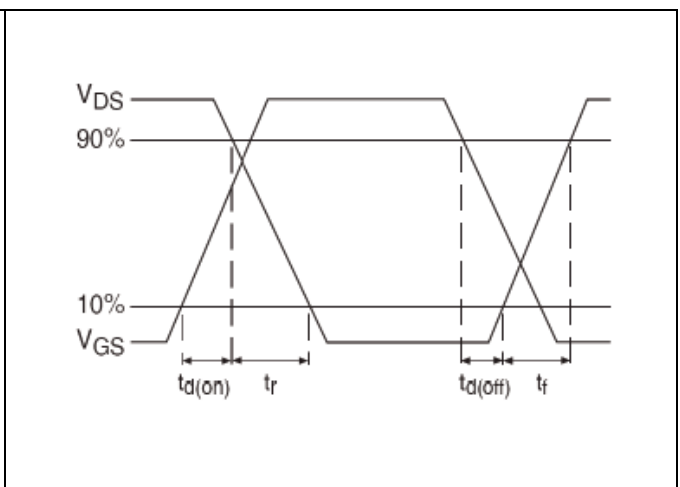


Figure 22 Switching Time Waveforms

**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**  
**Package Outline (Low-Ohmic TO-257AA)**

## 5 Package Outline (Low-Ohmic TO-257AA)

**Note:** For the most updated package outline, please see the website: [TO-257AA](http://www.infineon.com/toc-257aa)

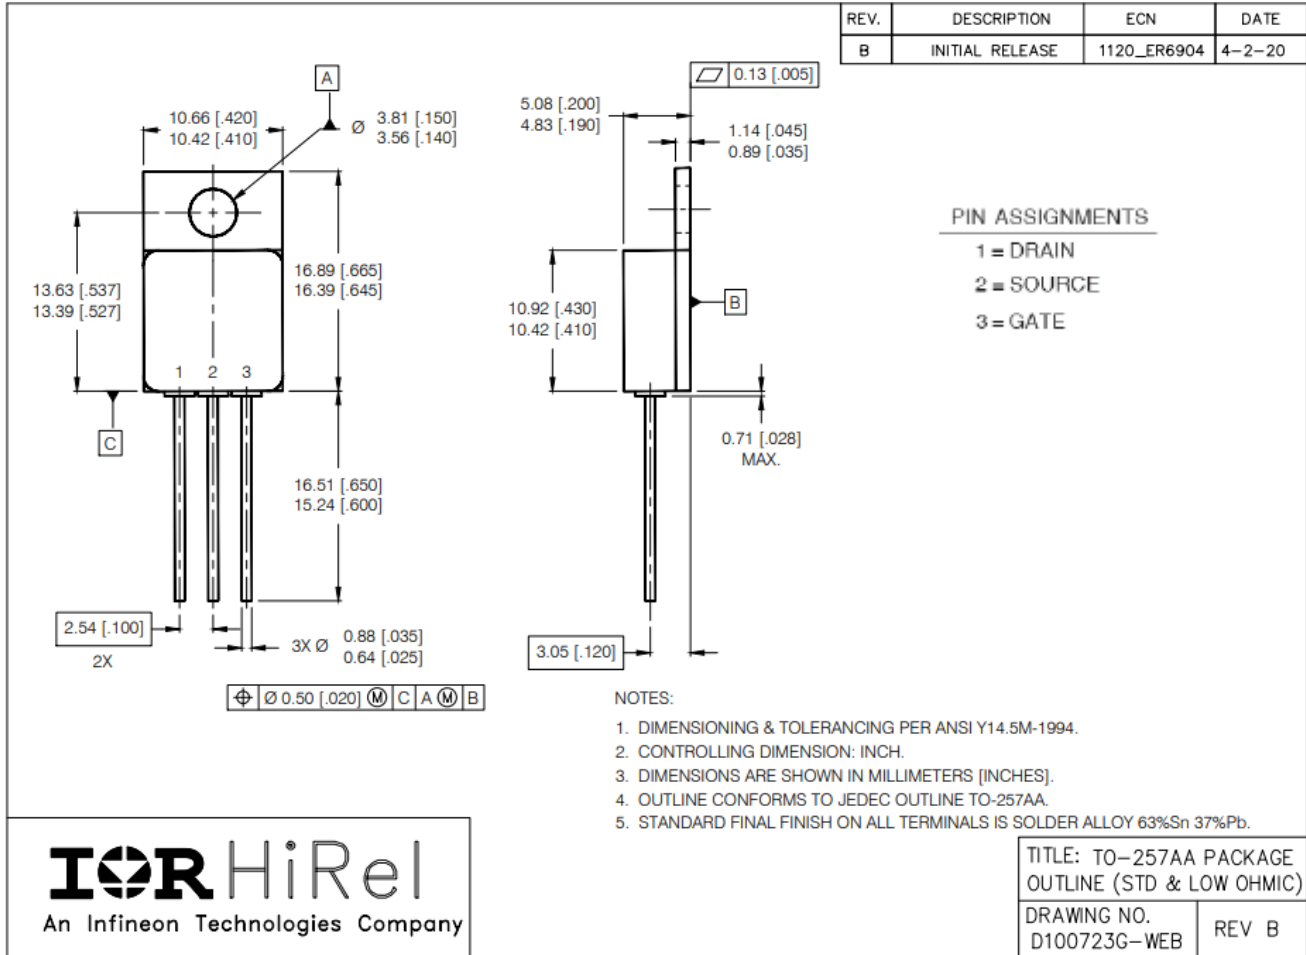


**BERYLLIA WARNING PER MIL-PRF-19500**

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

**IRHYS9A7234CM, IRHYB9A7234CM**  
**Radiation Hardened Power MOSFET Thru-Hole (TO-257AA)**  
**Package Outline (Tabless TO-257AA)**

## 6 Package Outline (Tabless TO-257AA)

**Note:** For the most updated package outline, please see the website: [Tabless TO-257AA](#)

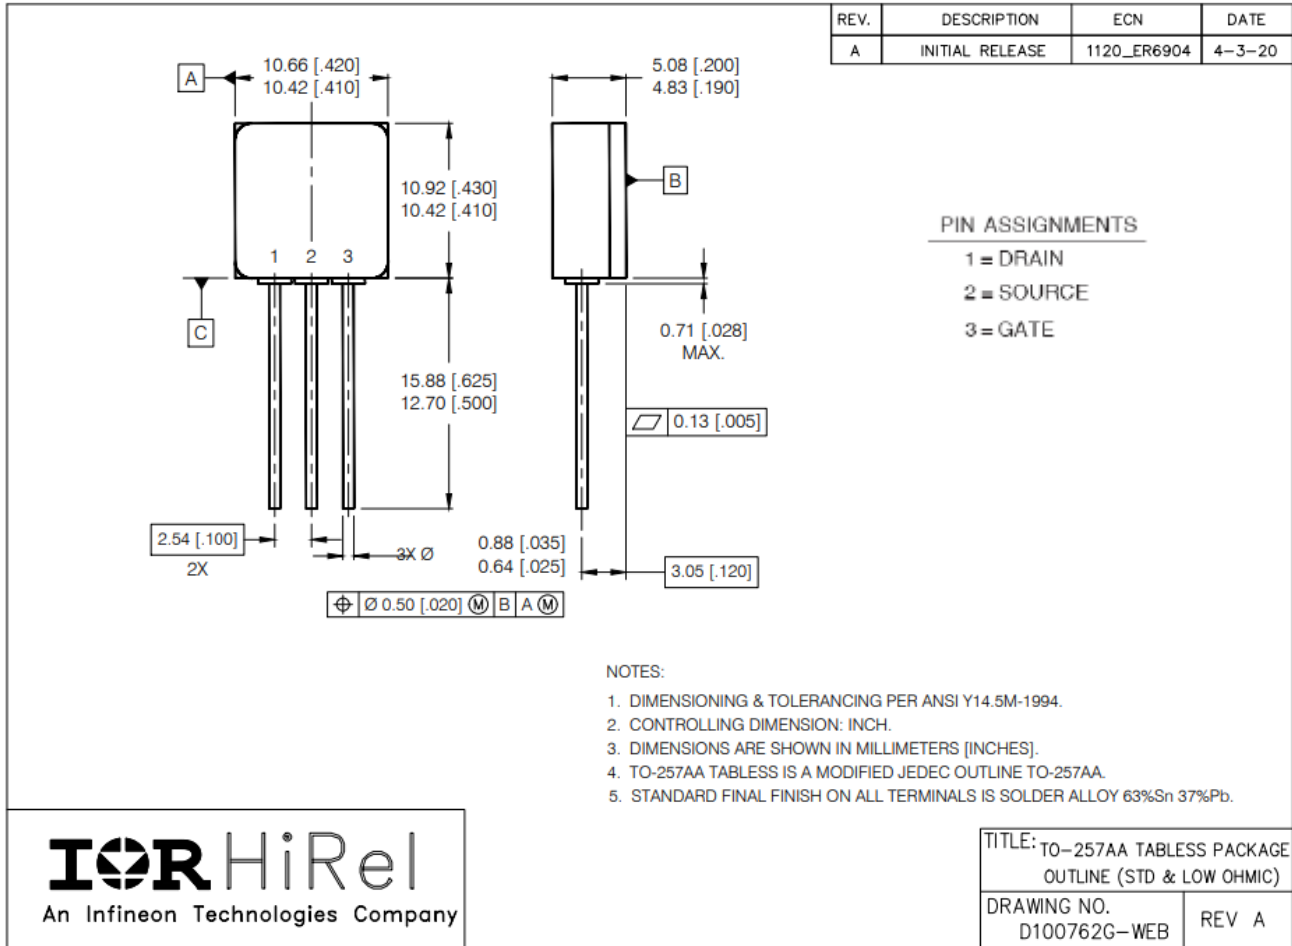

**BERYLLIA WARNING PER MIL-PRF-19500**

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

Revision history

**Revision history**

Document version	Date of release	Description of changes
	10/28/2019	Datasheet (PD-97886A)
Rev B	05/09/2022	Updated based on ECN-1120_09100

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2022-05-09**

### Published by

**International Rectifier HiRel Products,  
Inc.**

**An Infineon Technologies company  
El Segundo, California 90245 USA**

**© 2022 Infineon Technologies AG.  
All Rights Reserved.**

**Do you have a question about this  
document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest International Rectifier HiRel Products, Inc., or Infineon Technologies company, office.

International Rectifier HiRel Components may only be used in life-support devices or systems with the expressed written approval of International Rectifier HiRel Products, Inc., an Infineon Technologies company, if failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety and effectiveness of that device or system.

Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.