

Preliminary

SIDC23D60E6

Fast switching diode chip in EMCON-Technology

FEATURES:

- 600V EMCON technology 70 µm chip
- soft , fast switching
- low reverse recovery charge
- small temperature coefficient

This chip is used for:

EUPEC power modules and discrete devices



Applications:

SMPS, resonant applications, drives

Chip Type	V_R	I _F	Die Size	Package	Ordering Code
SIDC23D60E6	600V	50A	3.5 x 6.5 mm ²	sawn on foil	Q67041-A2825-
OIDOZODOOLO	0000	30A	3.5 X 0.5 IIIII	Sawii Oli IOII	A001

MECHANICAL PARAMETER:

WEGHANICAL PARAWETER.		1			
Raster size	3.5 x 6.5				
Area total / active	22.75 / 16.5	mm ²			
Anode pad size	2.78 x 5.78				
Thickness	70	μm			
Wafer size	150	mm			
Flat position	180	deg			
Max. possible chips per wafer	644 pcs				
Passivation frontside	Photoimide				
Anode metallisation	3200 nm AlSiCu				
Cathode metallisation	1400 nm Ni Ag –system suitable for epoxy and soft solder die bonding				
Die bond	electrically conductive glue or solder				
Wire bond	AI, ≤500μm				
Reject Ink Dot Size Ø 0.65mm ; max 1					
Recommended Storage Environment	store in original container, in dry nitrogen, < 6 month at an ambient temperature of 23°C				



SIDC23D60E6

Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Repetitive peak reverse voltage	V_{RRM}		600	V
Continuous forward current limited by T_{imax}	I _F		50	
Single pulse forward current (depending on wire bond configuration)	I _{FSM}	$t_P = 10 \text{ ms sinusoidal}$	tbd	А
Maximum repetitive forward current limited by T _{jmax}	I _{FRM}		150	
Operating junction and storage temperature	$T_{\rm j}$, $T_{ m stg}$		-55+150	°C

Static Electrical Characteristics (tested on chip), T_j =25 °C, unless otherwise specified

Parameter	Symbol	Cond	Value			Unit	
raiailletei	Syllibol	Conditions		min.	Тур.	max.	
Reverse leakage current	I_{R}	V _R =600V	<i>T_j</i> =25 °C			27	μΑ
Cathode-Anode breakdown Voltage	V_{Br}	$I_R=3mA$	<i>T_j</i> =25°C	600			V
Forward voltage drop	V _F	I _F =50A	<i>T_j</i> =25°C		1.25		V

Dynamic Electrical Characteristics, at T_j = 25 °C, unless otherwise specified, tested at component


Parameter	Symbol	Conditions		Value			Unit
	Syllibol			min.	Тур.	max.	
Reverse recovery time	t _{rr1}	I _F =50A	$T_j = 25$ °C		tbd		
	t _{rr2}	$di/dt=2900A/ms$ $V_R=300V$	$T_j = 125$ °C				ns
Peak recovery current	I _{RRM1}	I _F =50A	$T_j = 25$ °C		75.3		Α
	I _{RRM2}	$\begin{array}{c} \longrightarrow di/dt = 2900A/ms \\ V_R = 300V \end{array}$	$T_j = 125$ °C		85.2]^
Reverse recovery charge	Q _{rr1}	I _F =50A	<i>T_j</i> =25 °C		3.6		μC
	Q _{rr2}	$\frac{di/dt=2900A/ms}{V_{R}=300V}$	T _j =125°C		5.9		μο
Peak rate of fall of reverse	di _{rr1} /dt	I _F =50A	$T_{\rm j}$ = 25 ° C		tbd		A / -
recovery current	di _{rr2} /dt	$di/dt=2900A/ms$ $V_R=300V$	T _j =125°C				A/μs
Softness	S1	$I_F=50A$ di/dt=2900A/ms	<i>T_j</i> =25 °C		tbd		1
	S2	$V_R = 300V$	$T_j=125$ °C				<u> </u>



SIDC23D60E6

L427B1

Die-Size 3500 um x 6500 um

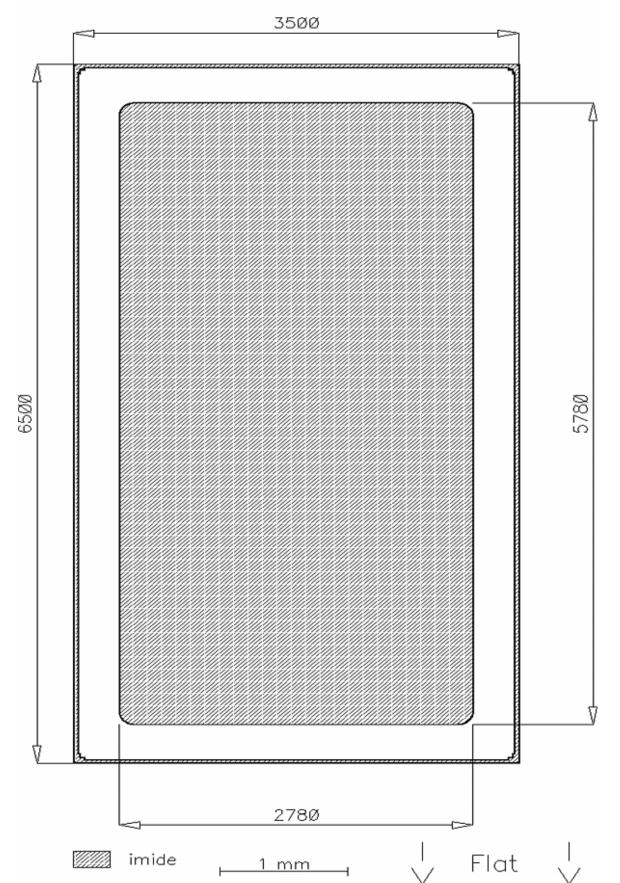



Preliminary

SIDC23D60E6

FURTHER ELECTRICAL CHARACTERISTICS:

Electrostatic Discharge Sensitive Device according to MIL-STD 883

This chip data sheet refers to the device data sheet	INFINEON TECHNOLOGIES / EUPEC	tbd				
Description:						
AQL 0,65 for visual inspection according to failure catalog						

Test-Normen Villach/Prüffeld

Published by Infineon Technologies AG Bereich Kommunikation St.-Martin-Strasse 53 D-81541 München © Infineon Technologies AG 2000 All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives world-wide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and / or maintain and sustain and / or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.