



XC2387A

Next Generation Safety Microcontroller with 32-Bit Performance

The XC2387A is a new member of the XC2300 microcontroller family, a subset of the XC2000 family, with focus on safety-applications. The XC2387A contains, besides the well known standard peripherals, dedicated safety features like a memory protection unit (MPU), a memory checker module (CRC) and a new broken wire detection ability of the ADC. The XC2387A comes in a 144-pin package, available memory options are up to 832kB embedded flash.

Applications

- Automotive Safety

Features

- High performance C166S V2 CPU with 5-stage pipeline
- Single clock cycle instruction execution with 12.5 ns instruction time at 80 MHz CPU clock
- 12.5 ns multiplication (16 x 16 bit), background division (32/16 bit) and multiply-and-accumulate (MAC) instructions
- Zero cycle jump execution
- Register-based design with Multiple Variable Register Banks
- Fast context switching support with two additional local register banks
- 16 Mbytes total linear address space for code and data
- 1024 Bytes on-chip SFR area (C166 family compatible)
- Integrated Memory Protection Unit (MPU)
- 16-priority-level interrupts system with up to 87 sources, sample-rate down to one clock cycle
- 8-channel interrupt-driven single-cycle data transfer facilities via peripheral event controller (PEC)
- Clock generation via on-chip PLL or via Prescaler
- Available SRAM (including ECC):
 - 8 Kbytes on-chip stand-by RAM (SBRAM)
 - 2 Kbytes on-chip dual-port RAM (DPRAM)
 - 16 Kbytes on-chip data SRAM (DSRAM)
 - Up to 32 Kbytes on-chip program/data SRAM (PSRAM)


Main Features

- Up to 832 Kbytes on-chip Flash memory
 - Built-in error correction (ECC)
 - Up to 64 Kbytes ideal for data flash and EE PROM emulation
- Two synchronizable A/D converters with 24 channels, optional data processing, a conversion time below 1 μ s and broken wire detection.
- 16-Channel general purpose capture/compare unit
- Four capture/compare units for flexible PWM signal generation (3 capture/compare channels and 1 compare channel)
- Multi-functional general purpose timer unit with 5 timers
- Six serial interface channels to be used as UART, LIN, buffered SPI, IIC Bus Interface, IIS Interface (optional feature; dedicated interfaces offered as well)
- On-Chip MultiCAN Interface (Rev. 2.0B active) with 64 message objects on 3 CAN nodes and gateway functionality
- On-chip real time clock
- Programmable watchdog timer and oscillator watchdog
- Up to 118 general purpose I/O lines
- On-chip bootstrap loader
- Supported by a large range of development tools
- On-chip debug support via JTAG interface
- 144-pin green LQFP package, 0.5 mm (19.7m) pitch
- Single Power Supply from 3.0 V to 5.5 V
- Temperature range -40° to +125°C

XC2387A

Next Generation Safety Microcontroller with 32-Bit Performance

Block Diagram XC2387A

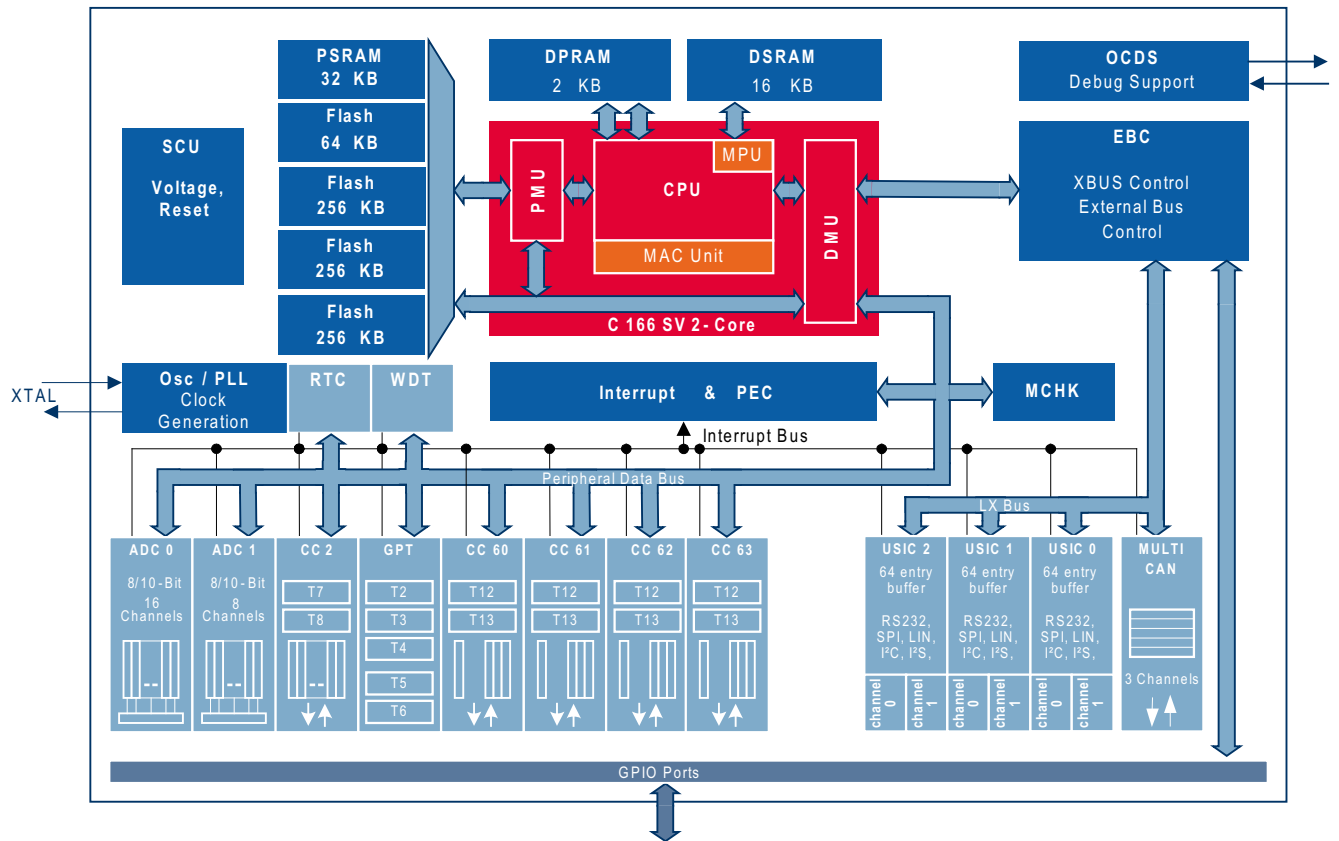

Product Summary

Type	eFlash [Kbytes]	RAM [Kbytes]	Frequency [MHz]	Serial Interface	ADC Channels	Temperature Range [°C]	Package
SAK-XC2387A-104F80L50	832	50	80	6 x USIC, 3 CAN	24	-40 ... 125	PG-LQFP-144

How to reach us:
<http://www.infineon.com>

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2008 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.