

**Please note that Cypress is an Infineon Technologies Company.**

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

**Continuity of document content**

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

**Continuity of ordering part numbers**

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

## Objective

This code example demonstrates how to use the I2C LCD Component with the NXP PCF2119x-compatible LCD modules. It also demonstrates the usage of address macros and custom commands.

## Overview

This code example uses the I2C LCD and I2C Components to display data on an NXP PCF2119x-compatible LCD module. The firmware shows test strings on the LCD and switches the row display mode every two seconds.

## Requirements

**Tool:** PSoC® Creator™ 4.2

**Programming Language:** C (Arm® GCC 5.4-2016-q2-update, MDK 5.22)

**Associated Parts:** All PSoC 4 parts

**Related Hardware:** CY8CKIT-040, CY8CKIT-041-40XX, CY8CKIT-041-41XX, CY8CKIT-042, CY8CKIT-042-BLE, CY8CKIT-042-BLE-A, CY8CKIT-044, CY8CKIT-046, CY8CKIT-048, CY8CKIT-149

## Hardware Setup

This example uses the kit's default configuration and requires external LCD module connections.

To connect the NXP PCF2119x-compatible LCD module to the PSoC 4 kit, use two 1k - 10k I2C pull-up resistors and a 10k LCD contrast potentiometer. [Figure 1](#) shows the LCD connections schematic. For the LCD module pinout, refer to your LCD module datasheet.

This example project is designed to run on the development kits listed in [Table 1](#). By default, example project has selected device for the CY8CKIT-042 kit. The project requires changes to configuration settings to run on other kits. To switch from CY8CKIT-042 to any other kit, change the project's device with the **Device Selector** called from the project's context menu.

**Note:** For Cypress kits, you can quickly select the target device. In **Device Selector**, right-click anywhere in the table area and select **Select Default Device**, then pick your kit's device series. For the series name, refer to [Table 1](#).

Table 1. Supported Kits and Devices

Development Kit	Series	Device
<a href="#">CY8CKIT-040</a>	PSoC 4000	CY8C4014LQI-422
<a href="#">CY8CKIT-041-40XX</a>	PSoC 4000S	CY8C4045AZI-S413
<a href="#">CY8CKIT-041-41XX</a>	PSoC 4100S	CY8C4146AZI-S433
<a href="#">CY8CKIT-042</a>	PSoC 4200	CY8C4245AXI-483
<a href="#">CY8CKIT-042-BLE</a>	PSoC 4200 BLE	CY8C4247LQI-BL483
<a href="#">CY8CKIT-042-BLE-A</a>	PSoC 4200 BLE	CY8C4248LQI-BL483
<a href="#">CY8CKIT-044</a>	PSoC 4200M	CY8C4247AZI-M485
<a href="#">CY8CKIT-046</a>	PSoC 4200L	CY8C4248BZI-L489
<a href="#">CY8CKIT-048</a>	PSoC Analog Coprocessor	CY8C4A45LQI-483
<a href="#">CY8CKIT-149</a>	PSoC 4100S Plus	CY8C4147AZI-S475

Pin assignments for supported kits are provided in [Table 2](#). For these kits, the project includes control files to automatically assign pins with respect to the kit hardware connections during the project build. To change pin assignments, override control file selections in the Pin Editor of the Design Wide Resources by selecting the new port or pin number.

Table 2. Pin Assignments

Development Kit	Pin Assignment		
	I2C:scl\	I2C:sda\	LCD_RST
<a href="#">CY8CKIT-040</a>	P1[2]	P1[3]	P1[7]
<a href="#">CY8CKIT-041-40XX</a>	P3[0]	P3[1]	P1[2]
<a href="#">CY8CKIT-041-41XX</a>	P3[0]	P3[1]	P1[2]
<a href="#">CY8CKIT-042</a>	P4[0]	P4[1]	P0[6]
<a href="#">CY8CKIT-042-BLE</a>	P3[5]	P3[4]	P0[3]
<a href="#">CY8CKIT-042-BLE-A</a>	P3[5]	P3[4]	P0[3]
<a href="#">CY8CKIT-044</a>	P4[0]	P4[1]	P6[2]
<a href="#">CY8CKIT-046</a>	P4[0]	P4[1]	P6[2]
<a href="#">CY8CKIT-048</a>	P4[0]	P4[1]	P0[6]
<a href="#">CY8CKIT-149</a>	P3[0]	P3[1]	P3[5]

## Software Setup

None.

## Operation

1. Plug your kit board into your computer's USB port.
2. Build the project and program it into the PSoC 4 device. Choose **Debug > Program**. For more information on device programming, see PSoC Creator Help.
3. Observe text changes on the LCD: the row display mode switches every two seconds: from normal to flipped with mirroring and vice versa ([Table 3](#)).

**Note:** If the LCD does not show anything or filled rectangles, adjust the contrast using potentiometer, which connected to the Vo pin of the display. For more details, refer to your LCD module datasheet.


Table 3. Text Output on LCD

	Original text	Flipped text
First row	CYPRESS!	CYbress!
Second row	Cypress!	CYbRESS!

## Design and Implementation

The Top Design Schematic of the project is in [Figure 1](#).

Figure 1. PSoC Creator Project Schematic

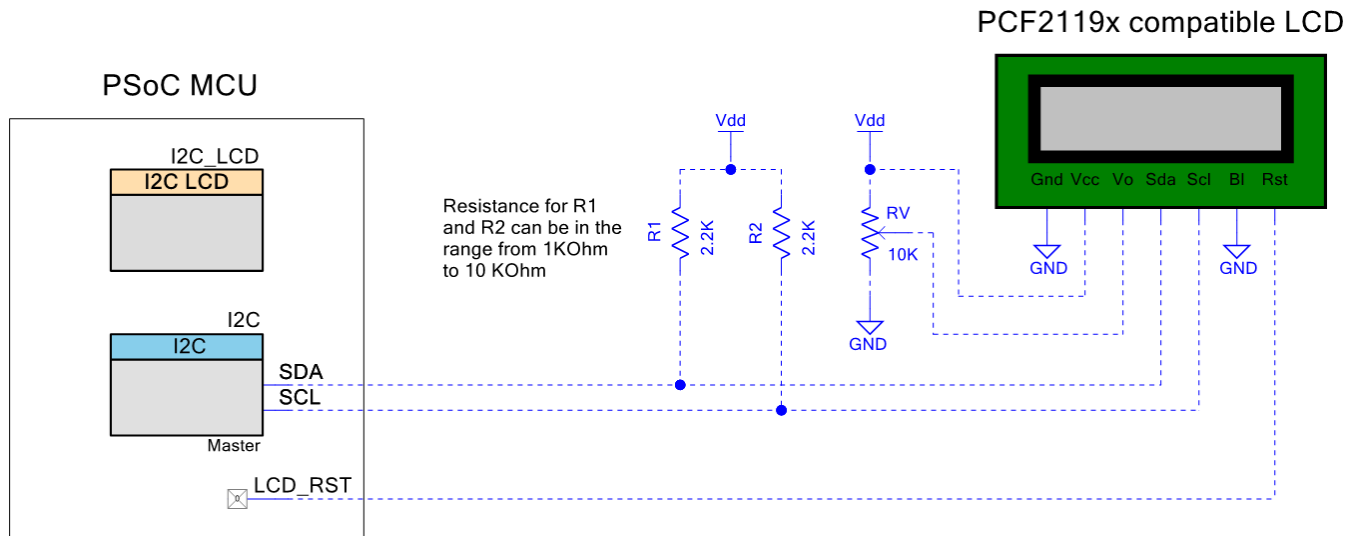

The I2C\_LCD Component provides a library for generating transactions defined by the NXP PCF2119x chip and drives the I2C Master interface to communicate with the LCD module. The LCD\_RST pin is used to output a reset signal for the LCD.

The firmware does the following:

- Initializes the I2C and I2C\_LCD Components
- Prints two strings: first with custom characters and second with characters from the LCDs internal character set
- Every two seconds switches the row display mode: from normal to flipped with mirroring and vice versa.

## Components and Settings

Table 4 lists the PSoC Creator Components used in this example, how they are used in the design, and the non-default settings required so they function as intended.


Table 4. PSoC Creator Components

Component	Instance Name	Purpose	Non-default Settings
Character LCD with I2C interface	I2C_LCD	Control the LCD module via I2C.	See <a href="#">Figure 2</a> and <a href="#">Figure 3</a>
I2C (SCB mode)	I2C	Handle communication with the LCD module.	Mode: Master
Digital Output Pin	LCD_RST	Initial reset of LCD.	HW connection: OFF

For information on the hardware resources used by the Component, see the Component datasheet.

[Figure 2](#) and [Figure 3](#) highlight the non-default settings for the I2C\_LCD Component.

Figure 2. I2C LCD Component Parameters Settings: General Tab

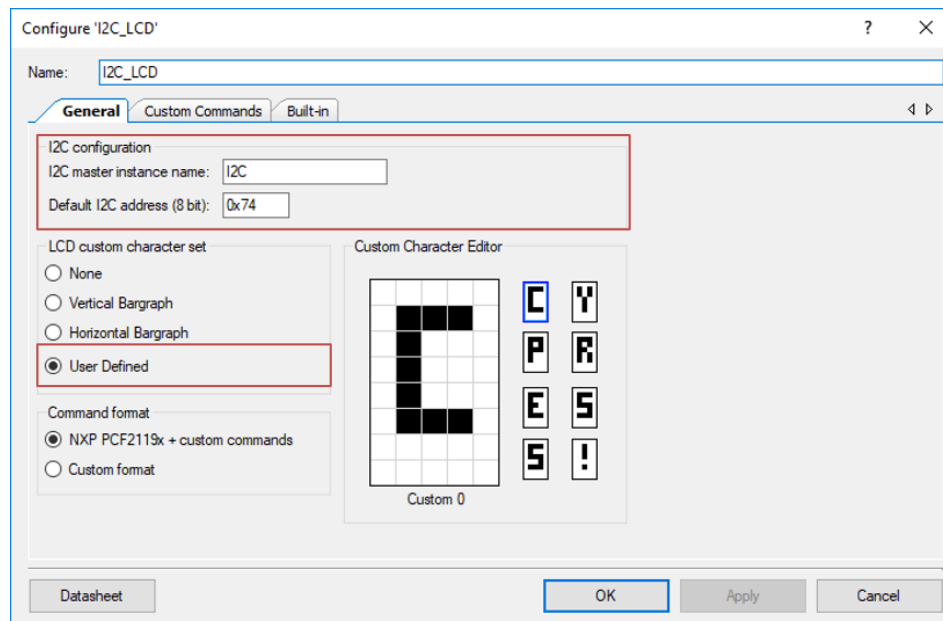

Configure 'I2C\_LCD'

Name: I2C\_LCD

**General** Custom Commands Built-in

I2C configuration

I2C master instance name: I2C

Default I2C address (8 bit): 0x74

LCD custom character set

☐ None

☐ Vertical Bargraph

☐ Horizontal Bargraph

☒ User Defined

Command format

☒ NXP PCF2119x + custom commands

☐ Custom format


Custom Character Editor

Custom 0

Datasheet OK Apply Cancel

Figure 3 shows the I2C LCD Component Custom Commands Tab configuration. In this tab, you can specify custom commands to control the LCD. For this code example, the custom commands are: selection of the extended function set and two display row configurations: normal and flipped.

Figure 3. I2C LCD Component Parameters Settings: Custom Commands Tab

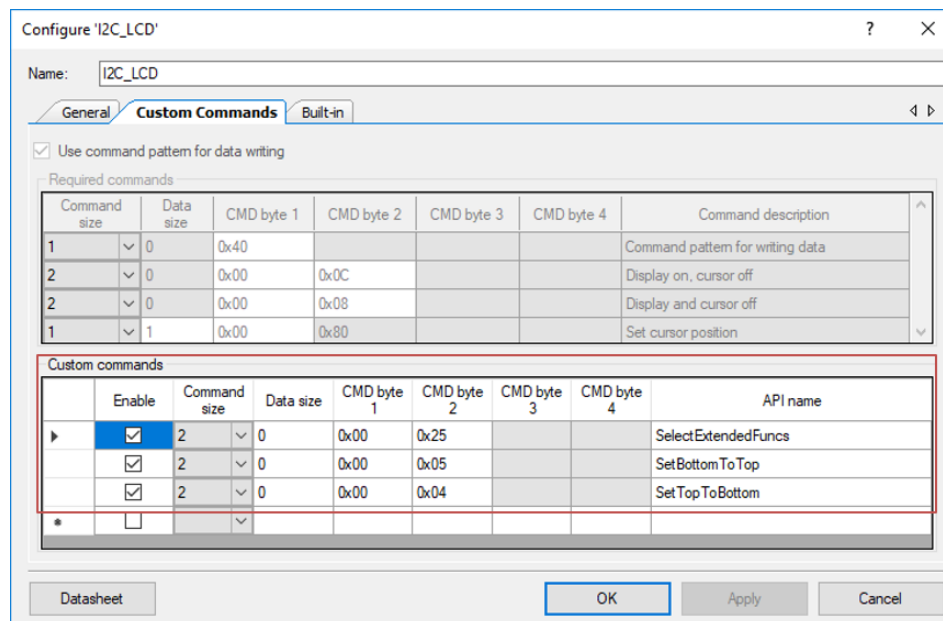

Configure 'I2C\_LCD'

Name: I2C\_LCD

**General** Custom Commands Built-in

☒ Use command pattern for data writing

Required commands

Command size	Data size	CMD byte 1	CMD byte 2	CMD byte 3	CMD byte 4	Command description
1	0	0x40				Command pattern for writing data
2	0	0x00	0x0C			Display on, cursor off
2	0	0x00	0x08			Display and cursor off
1	1	0x00	0x80			Set cursor position

Custom commands

Enable	Command size	Data size	CMD byte 1	CMD byte 2	CMD byte 3	CMD byte 4	API name
<input checked="" type="checkbox"/>	2	0	0x00	0x25			SelectExtendedFuncs
<input checked="" type="checkbox"/>	2	0	0x00	0x05			SetBottomToTop
<input checked="" type="checkbox"/>	2	0	0x00	0x04			SetTopToBottom
<input type="checkbox"/>							

Datasheet OK Apply Cancel

## Reusing This Example

This example is designed to run on the PSoC 4 Cypress kits listed in [Table 1](#). To port the design to a different PSoC 4 device, change the target device using the Device Selector and update the pin assignments in the Design Wide Resources Pins settings as needed.

You can add other custom commands in the I2C LCD Component Parameters Settings. Refer to your LCD module datasheet for the list of supported commands.

## Related Documents

Application Notes	
<a href="#">AN79953 – Getting Started with PSoC 4</a>	Introduces the PSoC 4 architecture and development tools
PSoC Creator Component Datasheets	
<a href="#">Character LCD with an I2C Interface (I2C LCD)</a>	Supports an I2C interfaced 2 line by 16 character LCD.
<a href="#">Serial Communication Block (SCB)</a>	Supports the hardware SCB block
<a href="#">Pins</a>	Supports connection of hardware resources to physical pins
Device Documentation	
<a href="#">PSoC 4 Datasheets</a>	<a href="#">PSoC 4 Technical Reference Manuals</a>
Development Kit Documentation	
<a href="#">PSoC 4 Kits</a>	

## Document History

Document Title: CE195325 – I2C LCD with PSoC 4

Document Number: 001-95325

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	5963599	MYKZTMP1	01/10/2018	New code example

## Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

Arm® Cortex® Microcontrollers	<a href="http://cypress.com/arm">cypress.com/arm</a>
Automotive	<a href="http://cypress.com/automotive">cypress.com/automotive</a>
Clocks & Buffers	<a href="http://cypress.com/clocks">cypress.com/clocks</a>
Interface	<a href="http://cypress.com/interface">cypress.com/interface</a>
Internet of Things	<a href="http://cypress.com/iot">cypress.com/iot</a>
Memory	<a href="http://cypress.com/memory">cypress.com/memory</a>
Microcontrollers	<a href="http://cypress.com/mcu">cypress.com/mcu</a>
PSoC	<a href="http://cypress.com/psoc">cypress.com/psoc</a>
Power Management ICs	<a href="http://cypress.com/pmic">cypress.com/pmic</a>
Touch Sensing	<a href="http://cypress.com/touch">cypress.com/touch</a>
USB Controllers	<a href="http://cypress.com/usb">cypress.com/usb</a>
Wireless Connectivity	<a href="http://cypress.com/wireless">cypress.com/wireless</a>

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

### Cypress Developer Community

[Community Forums](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor  
198 Champion Court  
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spanion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spanion, the Spanion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.