

**Please note that Cypress is an Infineon Technologies Company.**

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

**Continuity of document content**

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

**Continuity of ordering part numbers**


Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

# Operational Amplifier (Opamp)

1.90

## Features

- Follower or Opamp configuration
- Unity gain bandwidth > 3.0 MHz
- Input offset voltage 2.0 mV max
- Rail-to-rail inputs and output
- Output direct low resistance connection to pin
- 25-mA output current
- Programmable power and bandwidth
- Internal connection for follower (saves pin)

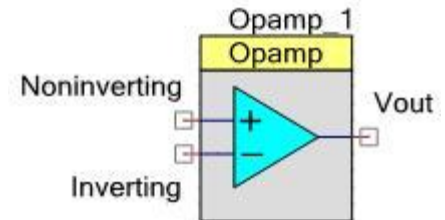

## General Description

The Opamp component provides a low-voltage, low-power operational amplifier and may be internally connected as a voltage follower. The inputs and output may be connected to internal routing nodes, directly to pins, or a combination of internal and external signals. The Opamp is suitable for interfacing with high-impedance sensors, buffering the output of voltage DACs, driving up to 25 mA; and building active filters in any standard topology.

## Input/Output Connections

This section describes the various input and output connections for the Opamp. An asterisk (\*) in the list of I/Os indicates that the I/O may be hidden on the symbol under the conditions listed in the description of that I/O.

### Noninverting – Analog

When the Opamp is configured as a follower, this I/O is the voltage input. If the Opamp is configured as an Opamp, this I/O acts as the standard Opamp noninverting input.

## Inverting – Analog \*


When the Opamp component is configured for Opamp mode, this I/O is the normal inverting input. When the Opamp is configured for Follower mode, this I/O is hard-connected to the output and the I/O is unavailable.

## Vout – Analog

The output is directly connected to a pin. It can drive 25 mA and can be connected to internal loads using the analog routing fabric. When used for internal routing, the output remains connected to the pin.


## Schematic Macro Information

The default Opamp in the Component Catalog is a schematic macro using an Opamp component with default settings. The Opamp component is connected to an analog Pin component named Vout\_1.

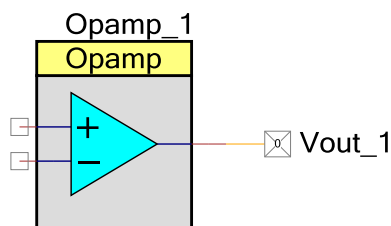

## Component Parameters

Drag an Opamp component onto your design and double-click it to open the **Configure** dialog.

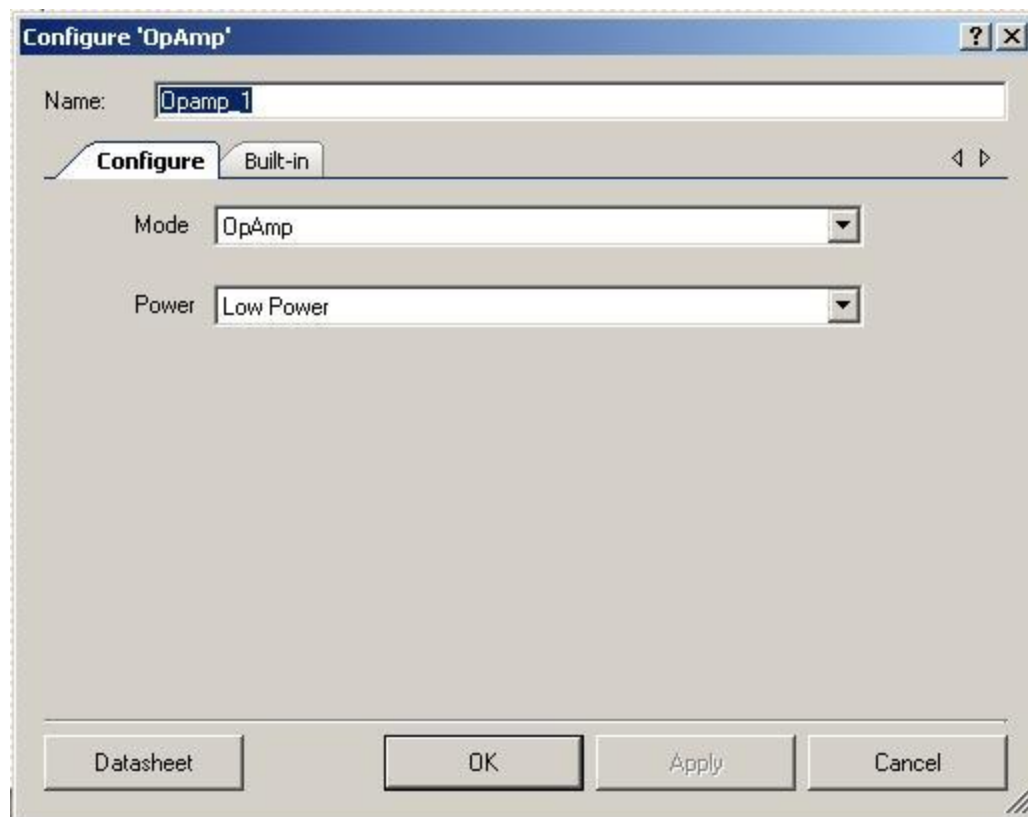


The Opamp has the following parameters:

### Mode

This parameter allows you to select between two configurations: **OpAmp** and **Follower**. **Opamp** is the default configuration. In this mode, all three terminals are available for connection. In follower mode, the inverting input is internally connected to the output to create a voltage follower.

**Figure 1. Configuration Options**

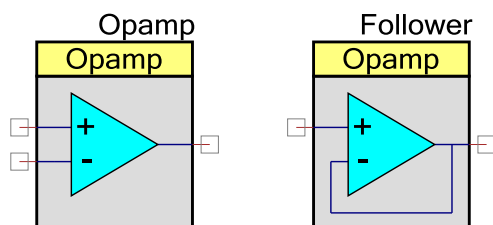

## Power

The Opamp works over a wide range of operating currents. Higher operating current increases Opamp bandwidth. The **Power** parameter allows you to select the power level:

- In **High Power** and **Med Power** modes, the output is a class AB stage, enabling direct drive of high output currents.
- In **Low Power** mode, the output is a class A stage with limited current drive.
- In **Low Power Over Compensated** (LPOC) mode, the output is a class A stage.

For PSoC 3 Production silicon, the LPOC mode is used for low-power transimpedance amplifiers (TIAs). This mode has the same drive capability as low power, but includes added compensation for circuit topologies with higher than normal input capacitance, as seen in photo sensors and other current-output sensors of various types.

Wider-bandwidth TIAs can be implemented using the medium or high-power settings. In this case, exercise the usual care in dealing with compensation for capacitively loaded sources.

**Note** The above description of LPOC mode is correct for PSoC 3 Production silicon only.

## Placement

Each Opamp is directly connected to specific GPIOs.


	Noninverting Input	Inverting Input	Output
opamp_0	P0[2]	P0[3]	P0[1]
opamp_1	P3[5]	P3[4]	P3[6]
opamp_2	P0[4]	P0[5]	P0[0]
opamp_3	P3[3]	P3[2]	P3[7]

Refer to the device datasheet for the part being used for the specific physical pin connections.

Input signals may use the analog global routing buses in addition to the dedicated input pins. Using the direct connections uses fewer internal routing resources and results in lower route resistance and capacitance. The output pin associated with each specific location will always be driven by the Opamp, when enabled.

Ports P0[3] and P3[2] are also used for connection to a capacitor for bypassing the bandgap reference supplied to the ADC, for a reference output, or for an input from an external reference. When these reference connections are used, routing to the Opamp inverting inputs must be done through the analog global routing buses.

Figure 2 shows one example of how the Opamp may be connected using the Design-Wide Resources Pin Editor.

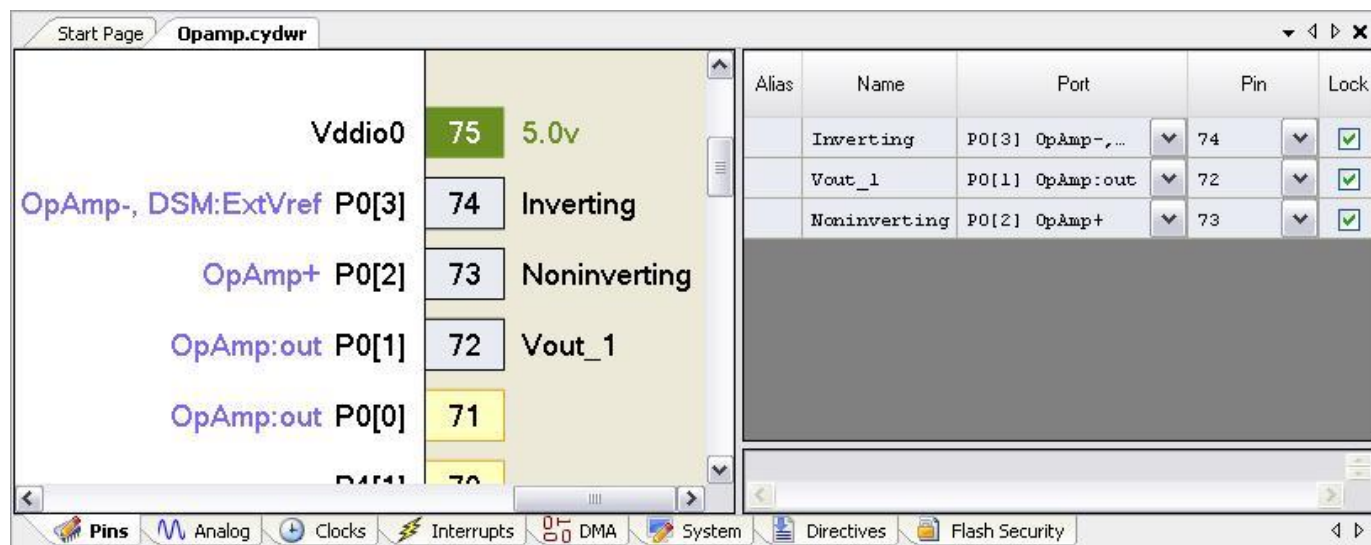**Figure 2. Example Placement**

## Application Programming Interface

Application Programming Interface (API) routines allow you to configure the component using software. The following table lists and describes the interface to each function. The subsequent sections cover each function in more detail.

By default, PSoC Creator assigns the instance name “Opamp\_1” to the first instance of a component in a given design. You can rename it to any unique value that follows the syntactic rules for identifiers. The instance name becomes the prefix of every global function name, variable, and constant symbol. For readability, the instance name used in the following table is “Opamp.”

Function	Description
Opamp_Start()	Turns on the Opamp and sets the power level to the value chosen during the parameter selection.
Opamp_Stop()	Disables Opamp (power down).
Opamp_SetPower()	Sets the power level.
Opamp_Sleep()	Stops and saves the user configuration.
Opamp_Wakeup()	Restores and enables the user configuration.
Opamp_Init()	Initializes or restores default Opamp configuration.
Opamp_Enable()	Enables the Opamp.
Opamp_SaveConfig()	Empty function. Provided for future use.
Opamp_RestoreConfig()	Empty function. Provided for future use.

## Global Variables

Variable	Description
Opamp_initVar	Indicates whether the Opamp has been initialized. The variable is initialized to 0 and set to 1 the first time Opamp_Start() is called. This allows the component to restart without reinitialization after the first call to the Opamp_Start() routine.  If reinitialization of the component is required, then the Opamp_Init() function can be called before the Opamp_Start() or Opamp_Enable() function.

## void Opamp\_Start(void)

<b>Description:</b>	Turns on the Opamp and sets the power level to the value chosen during the parameter selection.
<b>Parameters:</b>	None
<b>Return Value:</b>	None
<b>Side Effects:</b>	None

## void Opamp\_Stop(void)

<b>Description:</b>	Turns off the Opamp and enable its lowest power state.
<b>Parameters:</b>	None
<b>Return Value:</b>	None
<b>Side Effects:</b>	None

## void Opamp\_SetPower(uint8 power)

<b>Description:</b>	Sets the power level.
<b>Parameters:</b>	uint8 power: Sets the power level to one of four settings: LPOC, Low, Medium, or High.

Power Setting	Notes
Opamp_LPOCPOWER	Least power, compensated for TIA
Opamp_LOWPOWER	Least power, reduced bandwidth
Opamp_MEDPOWER	Medium bandwidth
Opamp_HIGHPower	Highest bandwidth

<b>Return Value:</b>	None
<b>Side Effects:</b>	None

## void Opamp\_Sleep(void)

**Description:** This is the preferred routine to prepare the component for sleep. The Opamp\_Sleep() routine saves the current component state. Then it calls the Opamp\_Stop() function and calls Opamp\_SaveConfig() to save the hardware configuration.

Call the Opamp\_Sleep() function before calling the CyPmSleep() or the CyPmHibernate() function. Refer to the PSoC Creator *System Reference Guide* for more information about power management functions.

**Parameters:** None

**Return Value:** None

**Side Effects:** None

## void Opamp\_Wakeup(void)

**Description:** This is the preferred routine to restore the component to the state when Opamp\_Sleep() was called. The Opamp\_Wakeup() function calls the Opamp\_RestoreConfig() function to restore the configuration. If the component was enabled before the Opamp\_Sleep() function was called, the Opamp\_Wakeup() function will also re-enable the component.

**Parameters:** None

**Return Value:** None

**Side Effects:** Calling the Opamp\_Wakeup() function without first calling the Opamp\_Sleep() or Opamp\_SaveConfig() function may produce unexpected behavior.

## void Opamp\_Init(void)

**Description:** Initializes or restores the component according to the customizer Configure dialog settings. It is not necessary to call Opamp\_Init() because the Opamp\_Start() routine calls this function and is the preferred method to begin component operation.

**Parameters:** None

**Return Value:** None

**Side Effects:** All registers will be set to values according to the customizer Configure dialog.

## void Opamp\_Enable(void)

**Description:** Activates the hardware and begins component operation. It is not necessary to call Opamp\_Enable() because the Opamp\_Start() routine calls this function, which is the preferred method to begin component operation.

**Parameters:** None

**Return Value:** None

**Side Effects:** If the initVar variable is already set, this function only calls the Opamp\_Enable() function.





## void Opamp\_SaveConfig(void)

<b>Description:</b>	Empty function. Provided for future use.
<b>Parameters:</b>	None
<b>Return Value:</b>	None
<b>Side Effects:</b>	None

## void Opamp\_RestoreConfig(void)

<b>Description:</b>	Empty function. Provided for future use.
<b>Parameters:</b>	None
<b>Return Value:</b>	None
<b>Side Effects:</b>	None

## MISRA Compliance

This section describes the MISRA-C:2004 compliance and deviations for the component. There are two types of deviations defined:

- project deviations – deviations that are applicable for all PSoC Creator components
- specific deviations – deviations that are applicable only for this component

This section provides information on component-specific deviations. Project deviations are described in the MISRA Compliance section of the *System Reference Guide* along with information on the MISRA compliance verification environment.

The OpAmp component does not have any specific deviations.

## Sample Firmware Source Code

PSoC Creator provides many example projects that include schematics and example code in the Find Example Project dialog. For component-specific examples, open the dialog from the Component Catalog or an instance of the component in a schematic. For general examples, open the dialog from the Start Page or **File** menu. As needed, use the **Filter Options** in the dialog to narrow the list of projects available to select.

Refer to the “Find Example Project” topic in the PSoC Creator Help for more information.

## Resources

The Opamp component uses one Opamp Fixed block per instance. When used in the Opamp mode with external components (that is, not routing the output through the analog globals), no routing resources are used.

## API Memory Usage

The component memory usage varies significantly, depending on the compiler, device, number of APIs used and component configuration. The following table provides the memory usage for all APIs available in the given component configuration.

The measurements have been done with the associated compiler configured in Release mode with optimization set for Size. For a specific design the map file generated by the compiler can be analyzed to determine the memory usage.

Configuration	PSoC 3 (Keil_PK51)		PSoC 5LP (GCC)	
	Flash Bytes	SRAM Bytes	Flash Bytes	SRAM Bytes
Default	130	2	198	5

## DC and AC Electrical Characteristics for PSoC 3

Specifications are valid for  $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$  and  $T_J \leq 100\text{ }^{\circ}\text{C}$ , except where noted.  
Specifications are valid for 1.71 V to 5.5 V, except where noted.

### DC Characteristics

Parameter	Description	Conditions	Min	Typ <sup>[1]</sup>	Max	Units
$V_I$	Input voltage range		$V_{SSA}$	–	$V_{DDA}$	V
$V_{IOFF}$	Input offset voltage	Temp = $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$	–	0.5	2	mV
TCVos	Input offset voltage drift with temperature	Power mode = high	–	$\pm 12$	$\pm 30$	$\mu\text{V}/^{\circ}\text{C}$
$A_{vol}$	Open-loop gain	Power mode = high	90	–	–	dB
$Ge_1$	Gain error, unity gain buffer mode	$R_{LOAD} = 1\text{ k}\Omega$	–	–	$\pm 0.1$	%


1. The values are for  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{DDA} = 5.0\text{ V}$ , Power = High, output referenced to analog ground,  $V_{SSA}$  except where noted.




Parameter	Description	Conditions	Min	Typ <sup>[1]</sup>	Max	Units
R <sub>IN</sub>	Input resistance	Positive gain, noninverting input	–	–	–	MΩ
C <sub>IN</sub>	Input capacitance	Routing from pin	–	–	18	pF
V <sub>O</sub>	Output voltage range	1 mA, source or sink, power mode = high	V <sub>SSA</sub> + 0.05	–	V <sub>DDA</sub> – 0.05	V
		100 K to V <sub>DDA</sub> /2, G = 1	–	–	–	V
I <sub>OUT</sub>	Output current, source or sink	V <sub>SSA</sub> + 500 mV ≤ V <sub>OUT</sub> ≤ V <sub>DDA</sub> – 500 mV, V <sub>DDA</sub> > 2.7 V	25	–	–	mA
		V <sub>SSA</sub> + 500 mV ≤ V <sub>OUT</sub> ≤ V <sub>DDA</sub> – 500 mV, 1.7 V = V <sub>DDA</sub> ≤ 2.7 V	16	–	–	mA
I <sub>DD</sub>	Quiescent current	Power mode = min	–	200	270	μA
		Power mode = low	–	250	400	μA
		Power mode = med	–	330	950	μA
		Power mode = high	–	1000	2500	μA
CMRR	Common mode rejection ratio		80	–	–	dB
PSRR	Power supply rejection ratio	V <sub>DDA</sub> ≥ 2.7 V	85	–	–	dB
		V <sub>DDA</sub> ≤ 2.7 V	70	–	–	

## Figures


Histogram Input Offset Voltage  
T = 25 °C, V<sub>DDA</sub> = 5.0 V

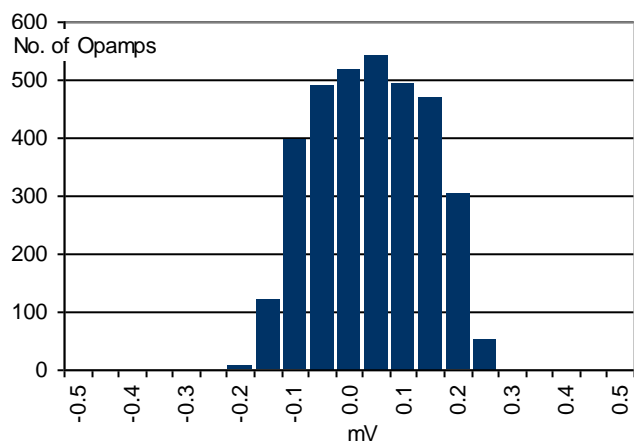


Opamp Operating Current versus V<sub>DDA</sub>, and Power Mode

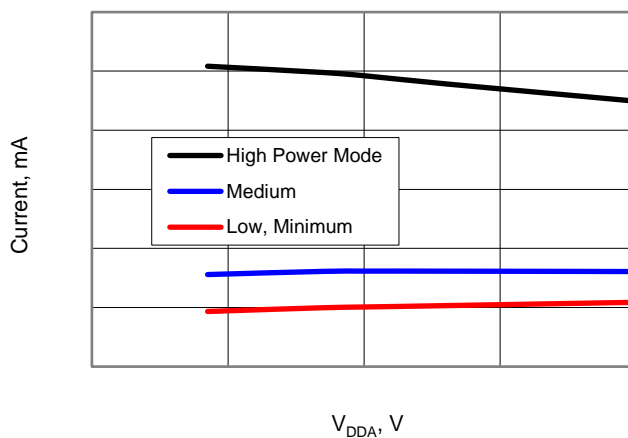


Operating Current versus Temperature,  $V_{DD} = 5.0\text{ V}$

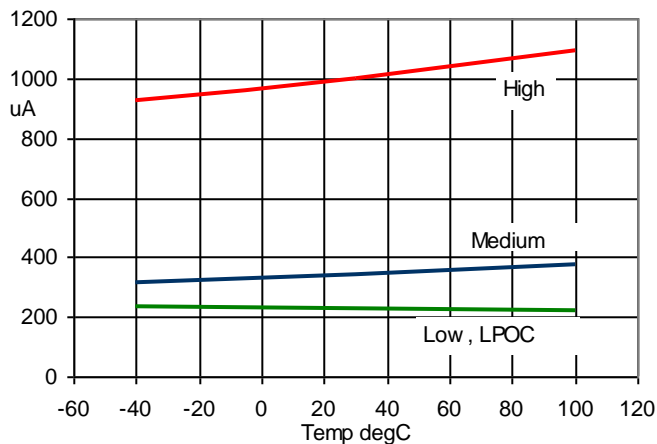


Operating Current versus Voltage  $T = 25\text{ }^{\circ}\text{C}$

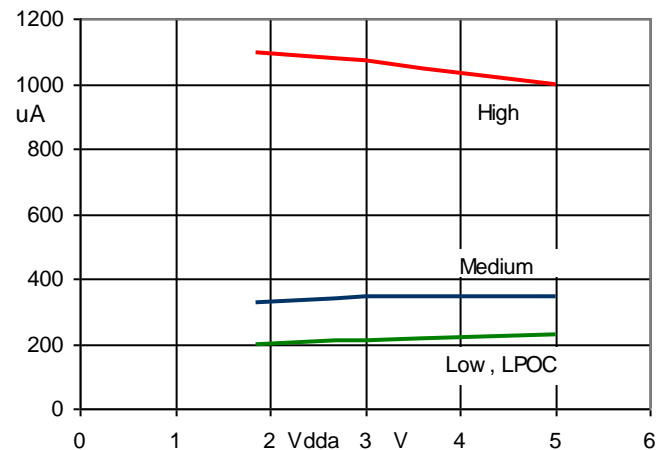


Output Voltage versus Load Current,  $V_{DDA} = 1.71\text{ V}$ , Power = High

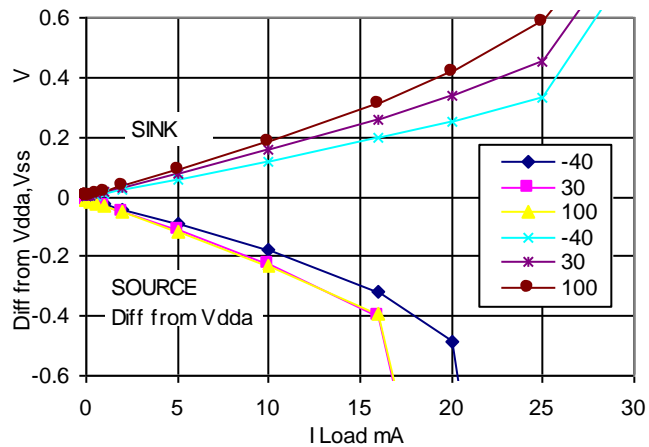


Output Voltage versus Load Current,  $V_{DDA} = 5.0\text{ V}$ , Power = High

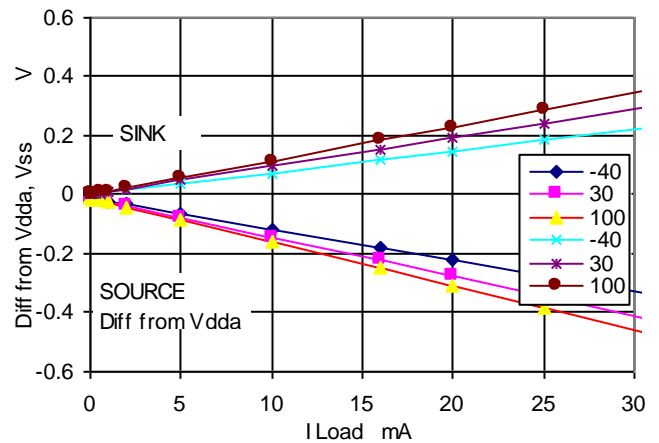


Output Voltage versus Load Current,  $V_{DDA} = 2.7\text{ V}$ , Power = Med

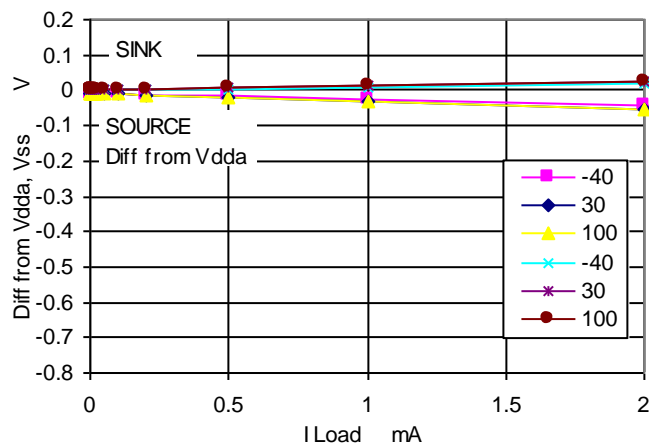


Output Voltage versus Load Current,  $V_{DDA} = 5.0\text{ V}$ , Power = Medium

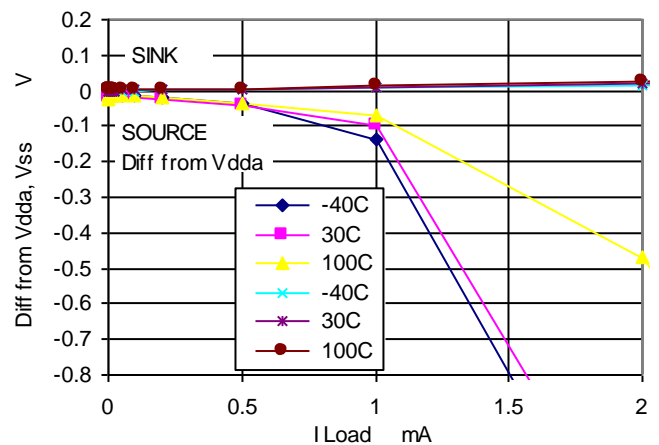


Output Voltage versus Load Current,  
 $V_{DDA} = 2.7\text{ V}$ , Power = Low

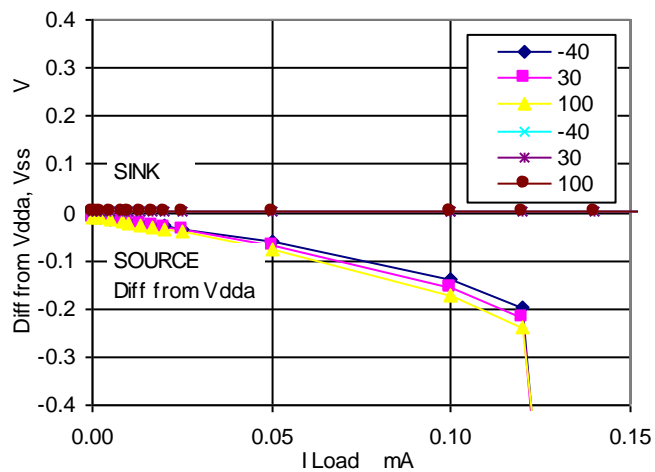

Output Voltage versus Load Current,  
 $V_{DDA} = 5.0\text{ V}$ , Power = Low

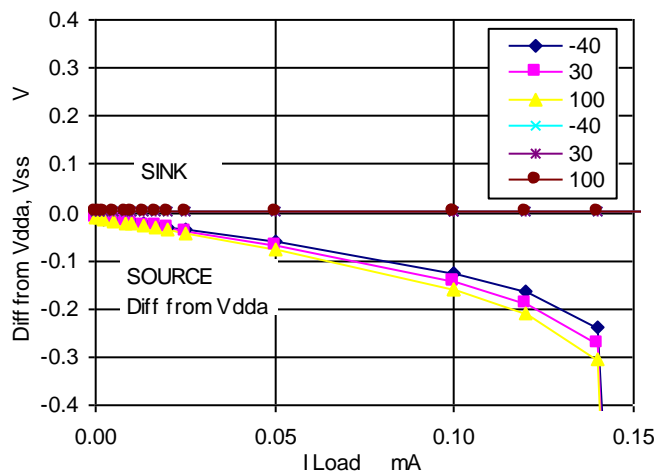

Input Offset Voltage versus Temperature  
 Power = High,  $V_{DDA} = 5.0\text{ V}$

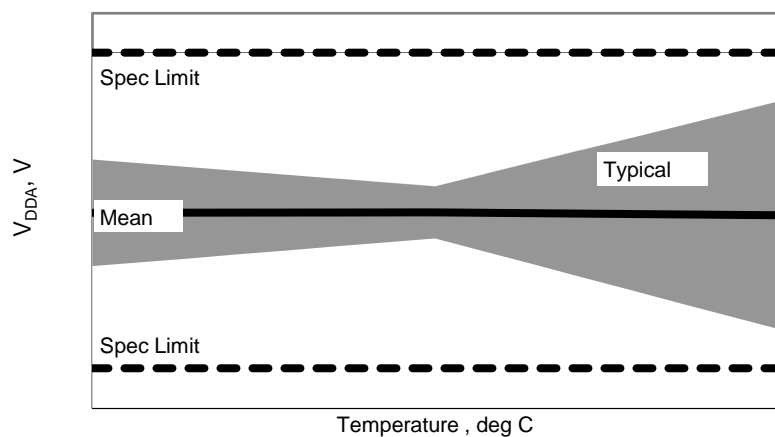

## AC Characteristics


Parameter	Description	Conditions	Min	Typ	Max	Units
GBW	Gain-bandwidth product	Power mode = minimum, 100 mV pk-pk, 15-pF load	1	—	—	MHz
		Power mode = low, 100 mV pk-pk, 15-pF load	2	—	—	MHz
		Power mode = medium, 100 mV pk-pk, 15-pF load	1	—	—	MHz
		Power mode = high, 100 mV pk-pk, 200-pF load	3	—	—	MHz

Parameter	Description	Conditions	Min	Typ	Max	Units
SR	Slew Rate	Power mode = low, 15-pF load	1.1	2.4	–	V/μs
		Power mode = medium, 15-pF load	0.9	1.4	–	V/μs
		Power mode = high, 200-pF load	3	4.3	–	V/μs
e <sub>n</sub>	Input noise density	Power mode = high, V <sub>DDA</sub> = 5 V, at 100 kHz	–	45	–	nV/sqrtHz

## Figures

Input Voltage Noise Density

T = 25 °C, V<sub>DDA</sub> = 5.0 V, Power = high

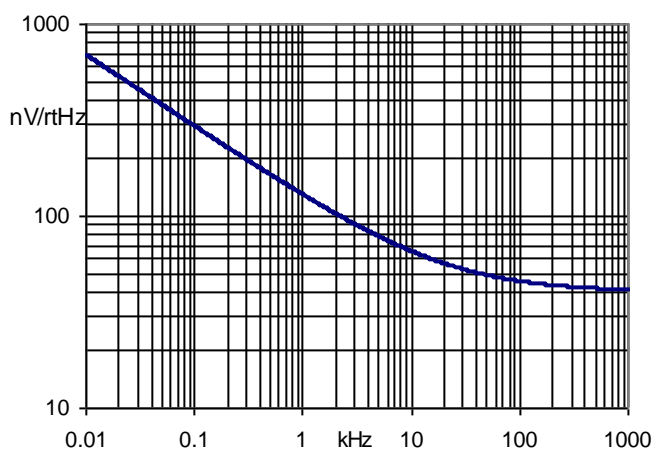

## DC and AC Electrical Characteristics for PSoC 5LP

Specifications are valid for  $-40\text{ °C} \leq T_A \leq 85\text{ °C}$  and  $T_J \leq 100\text{ °C}$ , except where noted.  
Specifications are valid for 1.71 V to 5.5 V, except where noted.

### DC Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Units
V <sub>I</sub>	Input voltage range		V <sub>SSA</sub>	–	V <sub>DDA</sub>	V
V <sub>OS</sub>	Input offset voltage	Operating temperature > 70 °C	–	–	3	mV
		Operating temperature –40 °C to 70 °C	–	–	2	mV
TCV <sub>OS</sub>	Input offset voltage drift with temperature		–	±12	±30	μV/°C
Ge1	Gain error, unity gain buffer mode	R <sub>LOAD</sub> = 1 kΩ	–	–	±0.1	%



Parameter	Description	Conditions	Min	Typ	Max	Units
C <sub>IN</sub>	Input capacitance	Routing from pin	–	–	18	pF
V <sub>O</sub>	Output voltage range	1 mA, source or sink	V <sub>SSA</sub> + 0.05	–	V <sub>DDA</sub> – 0.05	V
I <sub>OUT</sub>	Output current, source or sink	V <sub>SSA</sub> + 500 mV ≤ V <sub>out</sub> ≤ V <sub>DDA</sub> – 500 mV	10	–	–	mA
I <sub>DD</sub>	Quiescent current	V <sub>SSA</sub> + 50 mV ≤ V <sub>OUT</sub> ≤ V <sub>DDA</sub> – 500 mV	–	1	2.5	mA
CMRR	Common mode rejection ratio		80	–	–	dB
PSRR	Power supply rejection ratio		75	–	–	dB

## AC Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Units
GBW	Gain-bandwidth product	200 pF load	3	–	–	MHz
SR	Slew Rate	200 pF load	3	–	–	V/μs
e <sub>n</sub>	Input noise density	V <sub>DDA</sub> = 5 V, at 100 kHz	–	45	–	nV/sqrtHz

## Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.90.d	Minor datasheet edits.	
1.90.c	Minor datasheet edits.	
1.90.b	Edited the datasheet.	Removed PSoC 3 GBW parameter typical values from the AC Characteristics section.
1.90.a	Edited datasheet to remove references to PSoC 5.	PSoC 5 has been replaced by the PSoC 5LP.
1.90	Added MISRA Compliance section.	The component does not have any specific deviations.
1.80	Added PSoC 5LP support.	

Version	Description of Changes	Reason for Changes / Impact
	Added all APIs with the CYREENTRANT keyword when they are included in the .cyre file.	Not all APIs are truly reentrant. Comments in the component API source files indicate which functions are candidates. This change is required to eliminate compiler warnings for functions that are not reentrant used in a safe way: protected from concurrent calls by flags or Critical Sections.
	Input offset voltage vs Temperature graph updated in the datasheet to include x and y axis labels.	Labels needs to be added to the axes.
	Minor datasheet edits.	Improve readability.
1.70.a	Added PSoC 5 DC and AC characteristics	
1.70	Removed Low Power mode DRC error for PSoC 3 Production	Low power mode is supported in PSoC 3 Production
	Implemented DRC error to allow only High Power mode for PSoC 5	Only High Power mode is supported in PSoC 5
	Edited Opamp_SetPower() API to allow only High Power mode for PSoC 5	
	Debug window support added	New feature added
1.60	Added a GUI Configuration Editor	For easier use a GUI has been added to set the two parameters from a drop down
	Added characterization data to datasheet	
	Minor datasheet edits and updates	
1.50	Added Sleep/Wakeup and Init/Enable APIs.	To support low power modes, as well as to provide common interfaces to separate control of initialization and enabling of most components.



© Cypress Semiconductor Corporation, 2012-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.

