

Voltage Reference (Vref)

1.70

Features

1.024V **Vref**

- Precision voltage reference for analog blocks
- Routable bandgap generated voltage references: 0.256 V, 1.024 V
- Routable voltage supplies: Vdda, Vssa, Vccd, Vddd, Vbat, System-Wide Reference

General Description

The Voltage Reference (Vref) component allows you to provide a stable precision reference voltage for the analog resources in your design. Each component instance represents a physical analog reference source in the PSoC device. Depending on the allowed routing options available for your intended analog peripheral, you may choose from a list of supported reference voltages.

The on-chip voltage reference uses a curvature compensated voltage bandgap with a resistor divider to generate reference voltages of 1.024 V and 0.256 V. The method achieves a fixed DC voltage reference that remains stable and agnostic to temperature and supply voltage variations. You may also use the Vref component to route a voltage supply to your design, as long as the path is valid.

Notes

- The on-chip voltage reference is not intended to source or sink current. If the intended usage is to drive a signal, then buffer the Vref signal with an Opamp component.
- Every Vref is associated with an analog resource. To enable a Vref, the associated resource must be enabled. All Vrefs default their **AutoEnable** parameter to **true**. Since auto-enable Vrefs automatically enable the associated analog resource, all Vrefs are automatically enabled by default.

When to Use a Vref

Use Vref components for threshold detectors, reference inputs to analog-to-digital converters, comparators, and programmable gain amplifiers. They can also be used whenever you need a known voltage.


Input/Output Connections

The Vref component has a single output terminal that provides access to the selected voltage reference.

Component Parameters

Drag a Vref onto your design and double click it to open the **Configure** dialog.

Basic Tab

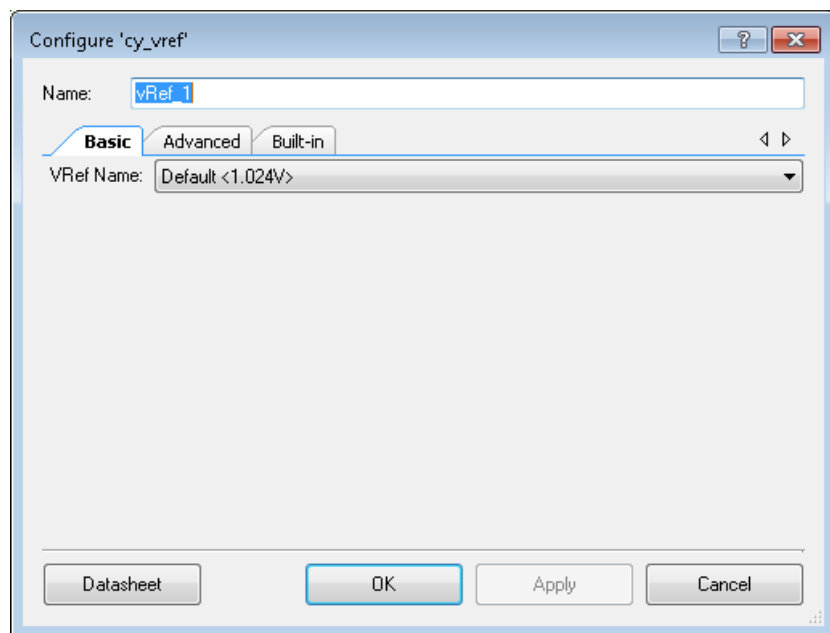


VRef Name

Defines the Vref source:

- 1.024 V (**Default**) – Produced using bandgap generator. Most widely supported voltage reference for analog peripherals.
- Vssa (GND) – Internal Vssa voltage.
- 0.256 V – Produced using bandgap generator. Supported in select analog peripherals.
- Vdda/2 – Derived from Vdda (HiZ) using a resistive divider. (Cannot be used in the design if a Vref component instance with Vdda (HiZ) exists, since they share the same source).
- Vdda (HiZ) – The Vdda voltage reference is provided with a resistive divider and so has high impedance. (Cannot be used in the design if a Vref component instance with Vdda/2 exists since they share the same source.)

- Vccd – Special 1.8-V reference that is only available as a source for SIO pins.
- Vddd – Internal Vddd voltage. Cannot be used in design if Vbat or Vdda are used.
- Vbat – Internal Vbat voltage. Cannot be used in design if Vddd or Vdda are used.
- Vdda – Internal Vdda voltage. Cannot be used in design if Vddd or Vbat are used.
- System-Wide Reference – Design-wide voltage reference derived from the programmable reference block. Not available for PSoC 3 or PSoC 5LP devices.

Advanced Tab

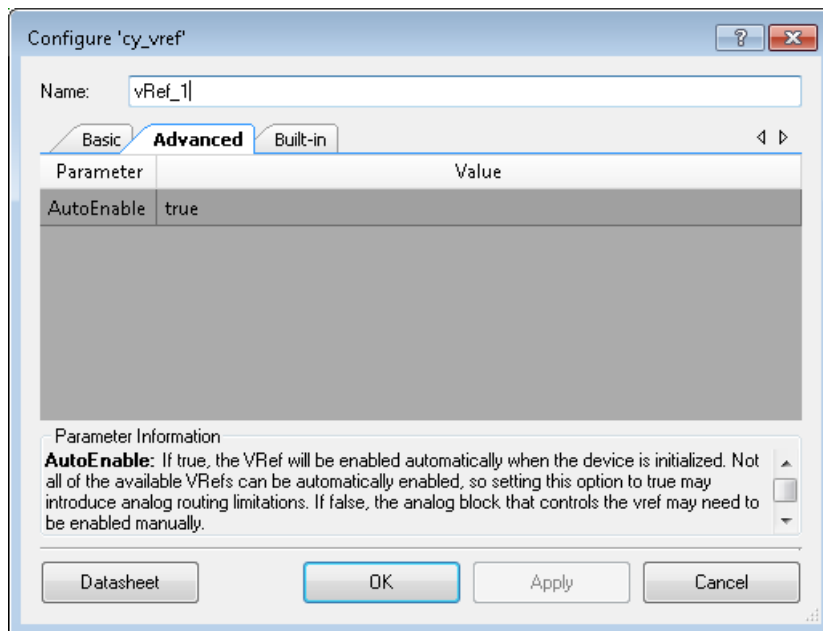

AutoEnable

When **AutoEnable** is set to **true (Default)**, Vref is enabled automatically when the device is initialized and the static analog routes are established. This parameter applies to the 1.024 V and 0.256 V options for connections that are not dedicated to analog peripherals.

When a 1.024 V or 0.256 V Vref is connected to intended analog block connections such as the comparator, the device automatically enables the Vref when the connected components are enabled. AutoEnable is not necessary in these cases.

If the intended use of the Vref component is to connect to a non-dedicated block, then it is necessary for the dedicated block for that voltage reference to be consumed and powered in order to power the voltage reference.

Notes

- Vref components that require **AutoEnable** set to **true** have reduced routing capability because specific analog routing resources are required to supply the auto-enable Vref.
- If **AutoEnable** is set to **false**, then you will need to enable the associated analog peripheral (e.g. comparator, DAC) to be able to use that particular Vref source. Refer to the Analog tab of the Design Wide Resources file to view the analog routing in your design.

Functional Description

The Vref component provides an analog voltage reference in your design by using one of the available voltage references. Connection to this particular voltage reference is through a single terminal. Depending on the source and available routing, the Vref component may be shared among several components.

Placement

For a design project, the list of available voltage references is determined by what is available from the selected family or device.

Note If using the Vref component in a library project, make the implementation device specific to be able to see the available reference sources.

The table below shows the list of supported voltage references for the dedicated analog blocks. All analog block reference sources are buffered by a low-power 5uA high accuracy buffer. You may use the table as a guide to determine the relationship between the voltage reference and the associated analog block.

Note If your design requires routing the voltage reference to destinations that are not meant for the dedicated analog block terminal, then additional resources may be used / needed.

Note Refer to the Analog tab of the Design Wide Resources editor to see the resource usage and analog routing in your design.

Analog block	Reference	Description
Comparator	1.024 V	To Comparator negative inputs.
	0.256 V	To Comparator negative inputs.
Opamp	1.024 V	To Opamp positive inputs.
SC/CT	1.024 V	To SC/CT block positive and negative inputs. For example, PGA and TIA components.

Analog block	Reference	Description
DAC	0.256 V	Reference voltage for DAC during VDAC mode operation.
DeltaSig ADC	1.024 V	Reference voltage to Delta Sigma Modulator. This voltage is additionally buffered in the DSM block by a 10 uA buffer.

The following table is a summary of routing resource used to connect voltage supplies in your design as voltage references.

Route source	Reference	Description
ABUSL0	Vdda (HiZ)	All analog blocks connected to the analog local bus ABUSL0 can get this voltage. Cannot be used if Vdda/2 is also used in the design via ABUSL0.
	Vdda/2	All analog blocks connected to the analog local bus ABUSL0 can get this voltage. Cannot be used if Vdda (HiZ) is also used in the design via ABUSL0.
Internal	Vccd	Uses the device Vccd source as voltage reference for the SIO pin.
	Vssa	Uses the internal device ground as reference.
Pin	Vddd	Connects to the Vddd pin
	Vbat	Connects to the Vbat pin (Passes through internal LPF).
	Vdda	Connects to the Vdda pin.

System-Wide Reference

The System-Wide Reference is based on the dedicated programmable reference hardware block in the silicon (not available for PSoC 3 or PSoC 5LP devices).

The System-Wide Reference provides an adjustable, stable reference voltage for the analog resources in your design. It could be based on either Vdda or the Bandgap voltage in 1/16 increments. This reference may be connected to any high impedance input, such as the input to an opamp or comparator. It cannot be routed to a GPIO unless it is buffered with an opamp.

Refer to the System Editor of the Design-Wide Resources (<project>.cydwr) file to see/adjust the configuration of the System-Wide Reference in your design.


You can also tune the Design-Wide Resources settings using System APIs. For more details, refer to device *System Reference Guide*.



AutoEnable Vref Connecting to an Amux Switchable Connection

An auto-enable 1.024 V or a 0.256 V Vref component must be by itself when connected to an Amux switchable connection. This restriction is introduced so the analog routine can handle the auto-enable Vref feature without ambiguities.

For example, in order for Design 1 to work it must be converted as shown in Design2.

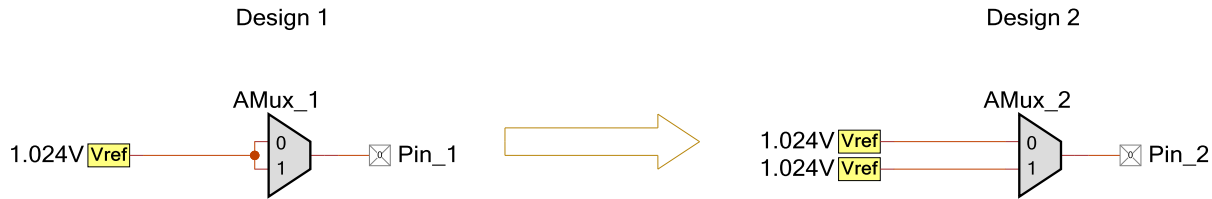

Note If you choose to set the **AutoEnable** parameter of the Vref component to **false**, this restriction does not apply. However it is likely that you will need to manually enable the associated analog block to supply power to the voltage reference.

Low Power Mode

In low power mode, Vssa (GND) and Vdda (HiZ) are the only two Vref options available.

Resources

When **AutoEnable** is enabled for a non-dedicated analog signal, the bandgap generated Vref (1.024 V and 0.256 V) consumes the associated analog block (e.g. a comparator). This is a necessary step in order to control the power setting of the voltage reference. Hence the analog block will no longer be available as a resource to be used in your design.

DC and AC Electrical Characteristics

The following values indicate expected performance based on initial characterization data. Note that the 1.024 V voltage reference calibrations were performed for the buffered ADC_DeISig reference.

Voltage Reference Specifications

Parameter	Description	Conditions	Min	Typ	Max	Units
V _{ref}	1.024V Vref = 1.024 ^[1]	Initial trimming, 25 °C		1.024 (+/- 0.5%)		V
	Temperature drift ^[2]	Box method	–	–	30	ppm/°C
	Long term drift		–	100	–	ppm/Khr
	Thermal cycling drift (stability) ^[2]		–	100	–	Ppm
R _{vdda}	Vdda/2 resistor division ratio accuracy		-1%	–	+1%	%
	DC Offset (process variation)		–	0	3.5	mV

¹ Although the +/-0.1% error is true for the output of the buffered Delsig reference, it is not true for any of the 1.024 V Vref components that a user places. These voltages can easily be off by +/-0.5% or more.

² Based on device characterization (Not production tested).



Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.70.a	Minor datasheet edits.	
1.70	Added System-Wide Reference to the Vref sources. Edited datasheet to add note about the 1.024 V reference error.	PSoC Analog Coprocessor device support.
1.60.a	Expanded Functional Description section	Added placement details and analog block relationship
	Updated DC and AC electrical characteristics	Added R_{vdda}
	Miscellaneous datasheet updates	General cleanup and added clarifying information
1.60	Removed IgnoreSleep parameter from the customizer.	The Vref component can't remain powered in low power mode. The IgnoreSleep parameter has no effect.
1.50.c	Minor datasheet edits and updates	
1.50.b	Updated description of Vdda(HiZ)	Description was unclear.
	Updated AutoEnable section to include quarter volt Vref	0.256-V Vref has the same AutoEnable properties as the 1.024-V Vref.
1.50.a	Added characterization data to datasheet	
	Datasheet edits	
1.50	Added AutoEnable and IgnoreSleep parameters to the customizer.	The AutoEnable and IgnoreSleep parameters provide additional functionality and a more intuitive user experience.
	Added the special purpose Vccd Vref for use with SIO pins.	The Vccd reference is used with SIO pins.
	Added Vbat, Vddd, and Vdda references.	The Vbat, Vddd, and Vdda references were added to provide additional functionality.

© Cypress Semiconductor Corporation, 2016-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.

